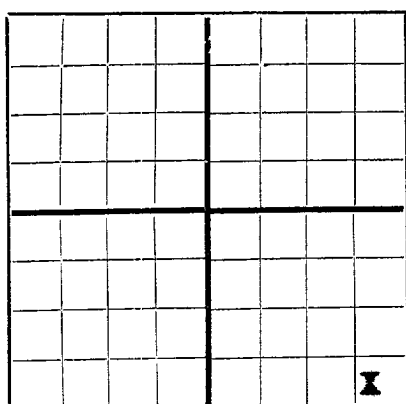


N

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

AREA 640 ACRES
LOCATE WELL CORRECTLY

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Ralph Lowe **Midland, Texas**
Company or Operator Address
Winters "C" Well No. **1** in **SE/4** of Sec. **12**, T. **25S**
Lease
R. **36E**, N. M. P. M. **Cooper Jal** Field, **Lea** County.
Well is **990** feet **N.** of the **North** line and **330** feet west of the East line of **SE SE**
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is **Elydia C. Winters**, Address **Jal, New Mexico**
If Government land the permittee is, Address
The Lessee is, Address
Drilling commenced **November 9** 19 **50** Drilling was completed **December 23** 19 **50**
Name of drilling contractor **H. R. Sindorf**, Address **Kermit, Texas**
Elevation above sea level at top of casing **3153** feet.
The information given is to be kept confidential until **19**

OIL SANDS OR ZONES

No. 1, from **2850** to **2973** No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from **355** to **362** feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
10 3/4	32	8	J&L	602	T.P.				Surface
7	20	8	J&L	2851					Oil String

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
12	10 3/4	602	300	Halliburton		
10	7	2851	350	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment **None Completed natural**

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet
Cable tools were used from **0** feet to **2973** feet, and from feet to feet

PRODUCTION

Put to producing **December 24, 1950**, 19
The production of the first 24 hours was **125** barrels of fluid of which **99.8** % was oil; **.2** % emulsion; % water; and % sediment. Gravity, Be. **38**
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

Forest Rumbaugh, Driller **F. R. Garrett**, Driller
Tom Williams, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this **27** day of **December**, 19 **50**
Betty C. Simpson Notary Public
My Commission expires **6-1-51**
My Commission Expires June 1, 1951

Midland, Texas **12-27-50**
Name **W. A. Taylor**
Position **Agent**
Representing **Ralph Lowe** Company or Operator
Address **Box 832 Midland, Texas**

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	11		Caliche
11	35		Sand
35	150		Shale
150	170		Sand
170	250		Red Rock
250	275		Gray Shale
275	390		Red Rock & Sand
390	420		Sand
420	430		Blue Shale
430	445		Sand
445	470		Red Rock
470	540		Shale & Sand
540	815		Red Rock
815	895		Red Rock Sand & Shale
895	935		Red Rock
935	970		Red Shale
970	1235		Anhy.
1235	1345		Salt
1345	1375		Blue Shale
1375	1430		Red Rock
1430	2385		Anhy. & Salt.
2385	2455		Anhy.
2455	2560		Salt & Anhy.
2560	2625		Anhy.
2625	2715		Salt.
2715	2755		Anhy
2755	2800		Lime
2800	2820		Sand
2820	2878		Lime
2878	2897		Broken Lime
2897	2950		Lime
2950	2973		Lime & Sand

