


DUPLICATE

(SUBMIT IN TRIPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Land Office Las Cruces
Lease No. 032581 (a)
Unit N.E.P.O.

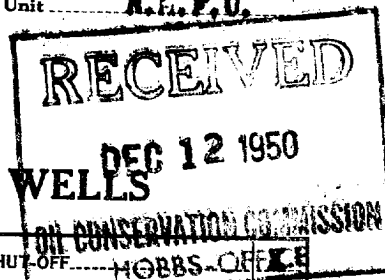

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF REDRILLING OR REPAIR.....
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT.....
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....
NOTICE OF INTENTION TO ABANDON WELL.....	

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

H. F. Sholes A-13 No. 3

Hobbs, New Mexico December 11, 1950

Well No. 3 is located 660 ft. from N line and 660 ft. from E line of sec. 13

SE/4 Sec. 13 25 S 36 E NCPM
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)

Cooper-Jail Len New Mexico
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is _____ ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

Set 5 1/2" casing at 3097 and cemented with 450 sacks cement. Total depth of hole 3100' in Lims. Plug down at 1:40 P.M. 12-4-50. Top of cement behind casing 1117 by Temperature Survey.

On 12-9-50, pressure tested casing with 1200# for 30 minutes. Final pressure 1180#. Found top of cement plug at 3052. Drilled out cement plug to 3096' for total depth.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Continental Oil Company

Address Box CC

Hobbs, New Mexico

By L. L. Shaper

Title District Superintendent

DEC 12 1950

dehinde, insequi, confidit