

NM OIL CONS. COMMISSION
UNITED STATES DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY
SUBMIT IN TRIPLICATE
(Other Instructions on Reverse Side)Form approved.
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

NM-021796

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Federal

9. WELL NO.

1

10. FIELD AND POOL, OR WILDCAT

Jalmat

11. SEC., T., R., M., OR BLK. AND
SURVEY OR AREA

Sec. 24-T25S-R36E

12. COUNTY OR PARISH

Lea

13. STATE

NM

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)1. OIL WELL ☒ GAS WELL ☐ OTHER ☐

2. NAME OF OPERATOR

MORRIS R. ANTWEIL

3. ADDRESS OF OPERATOR

P. O. Box 2010 Hobbs, NM 88240

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*
See also space 17 below.)
At surface990' FSL & 1650' FWL
Sec. 24-T25S-R36E

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

3098' DF

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

PULL OR ALTER CASING

MULTIPLE COMPLETE

ABANDON*

CHANGE PLANS

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

REPAIRING WELL


ALTERING CASING

ABANDONMENT*

(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

TD 3296' PBTD 3288' Perforations 3220'-3244'. Set cement retainer @ 3200'. Squeezed perfs w/200 sx Class "C" cement. Squeezed to 1300 psi. Left 20' cement on top of retainer. PBTD 3180'. Perforated w/single jet shots @ 3048', 3050', 3052', 3054', 3056', 3058', 3060', 3062', 3064', 3066', 3068', 3096', 3098', 3100', 3102', 3104', 3106', 3156', 3158', 3160', 3162', & 3164' (22 holes). Set packer @ 2996'. Treated perfs w/2500 gals. acid. Treated at 8.8 b/m w/2780 psi. ISIP 600 psi. on vacuum in 5 mins. Swabbed back load. Pump tested. Apparently emulsion blocked. Treated w/2000 gals. acid w/emulsion breaker. Continued to pump test. Prep to fracture treat.

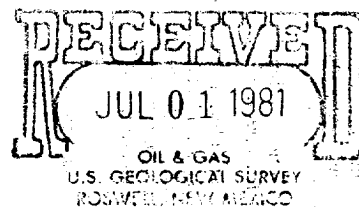

18. I hereby certify that the foregoing is true and correct

SIGNED

TITLE

Agent

DATE

25 Jun 81

(This space for Federal or State office use)

ACCEPTED FOR RECORD
PETER W. CHESTERAPPROVED BY
CONDITIONS OF APPROVAL

TITLE

DATE

U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

See Instructions on Reverse Side