


DUPLICATE

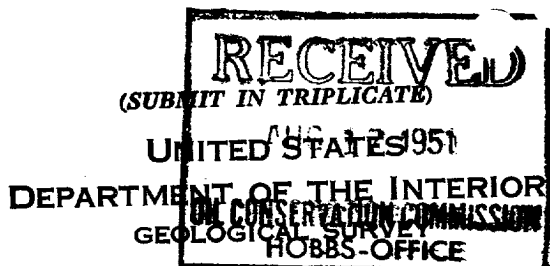

Land Office Las Cruces
Lease No. 032386 (b)
Unit N.M.P.U.

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	X
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF REDRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

Jack B-17 No. 3 Hobbs, New Mexico August 15, 19 51

Well No. 3 is located 990 ft. from N line and 990 ft. from E line of sec. 17

NE 1/4 Sec. 17 24-S 37-E N.M.P.M.
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)

Langlo-Hattix Lee New Mexico
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is _____ ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

Set 3 5/8" casing at 278' and cemented with 250 sacks cement, cement circulated. Plug down at 1:00 P.M. 8-13-51.

On 8-14-51, after 24 hrs. WOC, tested casing with 200# for 30 minutes before drilling plug, final pressure 195#. Drilled out plug and tested casing with 200# for 30 minutes, final pressure 190#.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Continental Oil Company

Address Box CC

Hobbs, New Mexico

By F. L. [Signature]

Title District Superintendent

14-00000

TABLE 1

[illegible]

Page 8-17

009

2

xxx

2-15

1. 2. 3.

[illegible]

for 30 minutes; final pressure 1204.
drilling plug; final pressure 1224.
On 8-14-51, after 24 hrs. WOC, tested casing with 2000 for 30 minutes before
drilled one plug and tested casing with 2000. Plug down at 1:00 P.M. 8-15-51.
Set 3 7/8 casing at 278; and cemented with 220 sacks cement; cement class-

~~Document~~ 110 Latent Index

50 182

000000 000000 000000

2025 RELEASE UNDER E.O. 14176