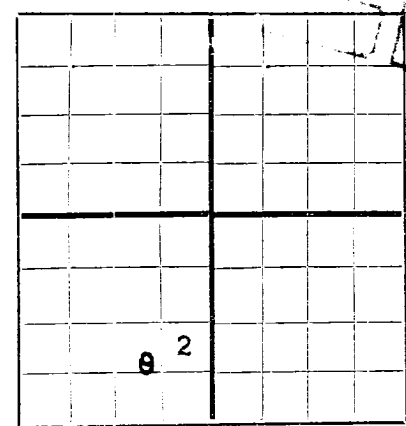


AREA 640 ACRES
LOCATE WELL CORRECTLYNEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Amerada Petroleum Corporation, Lawer D, Monument, New Mexico
Company or Operator Address
A.G. Faib, Well No. 2, in Sec. 19, T. 24S, R. 37E, N. M. P. M. Langlie-Mattix, Lea, County.
Well is 660 feet North of the South line and 1916.6 feet West of the East line of Sec. 19-24S-37E.
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is Address.
If Government land the permittee is Amerada Petroleum Corporation, Address Box 2040, Tulsa, Oklahoma.
The Lessee is Address.
Drilling commenced August 2, 1949, Drilling was completed September 16, 1949.
Name of drilling contractor McVay & Stafford, Address Tulsa, Oklahoma.
Elevation above sea level at top of casing 3271 feet.
The information given is to be kept confidential until Not Confidential, 19.

OIL SANDS OR ZONES

No. 1, from 3045' to 3068' Perforation No. 4, from to
No. 2, from 3078' to 3090' " No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
8-5/8	32	8	Gal. s.	314'	Gal. s.				
5-1/2	15.5	8	Gal. s.	3320'	Gal. s.				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
11"	8-5/8	314'	175	Gal. s.		
7-3/8	5-1/2	3320'	450	"		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Gal. s.	500 Gal.	9-15-49	3045-3068'	
					3078-3090'	

Results of shooting or chemical treatment made 128.76 wts. in on 11/64" choke in 12 hrs. flowing

See Attached List

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0' feet to 3320' feet, and from feet to feet.
Cable tools were used from feet to feet, and from feet to feet.

PRODUCTION

Put to producing September 15, 1949.
The production of the first 12 hours was 128.76 barrels of fluid of which 100% was oil; 0% emulsion; 0% water; and 0% sediment. Gravity, Be. 37.3 C. S. Vol. 306,000 cu. ft. per day.
If gas well, cu. ft. per 24 hours. Gallons gasoline per 1,000 cu. ft. of gas.
Rock pressure, lbs. per sq. in.

EMPLOYEES

A. S. Moore, Driller, J. L. Ivacy, Driller, J. L. Ivacy, Driller, J. L. Ivacy, Driller.

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this

day of

Notary Public

My Commission expires

Notary Public, Santa Fe, Sept. 17, 1949

Name

Position

Representing

Address

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	150	150	Sand Caliche & Red Rock
150	328	173	Red Bed
328	538	210	Red Rock
538	738	200	Sand Clay & Shells
738	960	222	Red Bed Sand & Shells
960	1090	130	Red Rock & Shells
1090	1135	45	Red Bed & Shells
1135	1238	103	Anhydrite
1238	2782	1544	Anhydrite & Salt
2782	2832	50	Lime
2832	2877	45	Anhydrite & Lime
2877	2905	28	Lime & Gyp.
2905	2965	60	Lime
2965	3030	65	Lime & Sand
3030	3070	40	Lime
3070	3133	63	Lime & Sand
3133	3320	187	Lime
3320			Total Depth
3236			Drilled out Depth

GEOLOGICAL TOPS	
Elevation Derrick Floor	3283'
Elevation Ground Level	3274'
Top Anhydrite	1140'
Top Salt	1240'
Base Salt	2805'
Top Yates	2965'
Top Zone #1	2985'
Top Pay	2965'

SLOPE TESTS			
148'	1°	1992'	3/4°
207'	1°	2112'	1°
298'	1°	2265'	1°
437'	1 1/2°	2362'	1 1/2°
497'	1 1/4°	2446'	1°
617'	1°	2537'	1 1/4°
676'	1 1/4°	2597'	1 1/4°
735'	1 1/4°	2660'	1 1/2°
824'	1 1/4°	2758'	1-3/4°
913'	1 1/4°	2814'	1 1/2°
973'	1°	2874'	1°
1181'	1-1/8°	2935'	1 1/4°
1302'	3/4°	3056'	1°
1451'	1 1/2°		
1632'	3/4°		
1813'	3/4°		
1931'	3/4°		