

DUPLICATE


NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

MISCELLANEOUS REPORTS ON WELLS

Submit this report in TRIPLICATE to the District Office, Oil Conservation Commission, within 10 days after the work specified is completed. It should be signed and filed as a report on Beginning Drilling Operations, Results of test of casing shut-off, result of plugging of well, result of well repair, and other important operations, even though the work was witnessed by an agent of the Commission. See additional instructions in the Rules and Regulations of the Commission.

Indicate Nature of Report by Checking Below

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON RESULT OF TEST OF CASING SHUT-OFF		REPORT ON REPAIRING WELL
REPORT ON RESULT OF PLUGGING WELL	<input checked="" type="checkbox"/>	REPORT ON RECOMPLETION OPERATION		REPORT ON (Other)

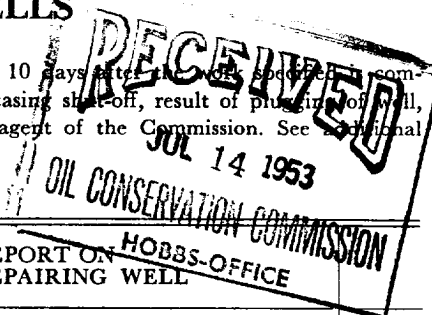

July 10, 1953
(Date)

Hobbs, New Mexico
(Place)

Following is a report on the work done and the results obtained under the heading noted above at the

Sinclair Oil & Gas Company
(Company or Operator)

Robert Jamison
(Lease)

M. J. Delaney Drilling Co.
(Contractor)

Well No. 4 in the NW 1/4 NW 1/4 of Sec. 22

T. 24 S, R. 37 E, NMPM, Langlie-Mattix Pool, Lea County.

The Dates of this work were as follows: 5-13-53, 5-23, 5-26, 5-28, 6-9-53

Notice of intention to do the work (was) (was not) submitted on Form C-102 on _____, 19____,
(Cross out incorrect words)

and approval of the proposed plan (was) (was not) obtained.

DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

Filled hole with heavy mud to 3860
TD 10,800 - Spotted 50 Sacks cement : 3860, cleaned out & drilled to 3695, Perforated 8 5/8" casing with 40 Jet shots from 3510 to 3520. Swabbed well down, no show of oil or gas.

Perforated 8 5/8" casing from 3500 to 3510 with 40 Jet shots, Swabbed well dry, no show of oil or gas. Acidized 3500 to 3510 with 500 Gal. of Mud acid. Swabbed well dry, no show of oil or gas.

Perforated 8 5/8" casing from 3440 to 3480 with 160 Jet shots, swabbed well dry, no show oil or gas. Acidized with 500 Gallons of mud acid, 3440 to 3480. Swabbed well dry, no show of oil or gas.

Filled hole with heavy mud. Recovered 1876 feet of 8 5/8" 24# casing. Capped well with 15 sacks of cement. Installed 4" x 4' regulation marker. Plugged & abandoned.

Witnessed by George R. Huddleston Sinclair Oil & Gas Co. Foreman
(Name) (Company) (Title)

Approved: OIL CONSERVATION COMMISSION

I hereby certify that the information given above is true and complete to the best of my knowledge.

Name: [Signature]

Position: Dist. Supt.

Representing: Sinclair Oil & Gas Co.

Address: Box 1927 Hobbs, N.M.

Oil & Gas Inspector

JAN 29 1954

(Title)

(Date)