


PLUG AND ABANDON DATA

OPERATOR: Texaco E&P Inc. LEASE: C.C. Fristoe B Federal NCT-2 #3
 FOOTAGE LOCATION: 660 FSLX 660 FEL Sec./Twn/Rng: Unit P, Sec 26, T-24-S, R-37-E
 Casing integrity tested 3-24-83, 500 psi/15 minutes - OK Lea County, New Mexico

SCHEMATIC

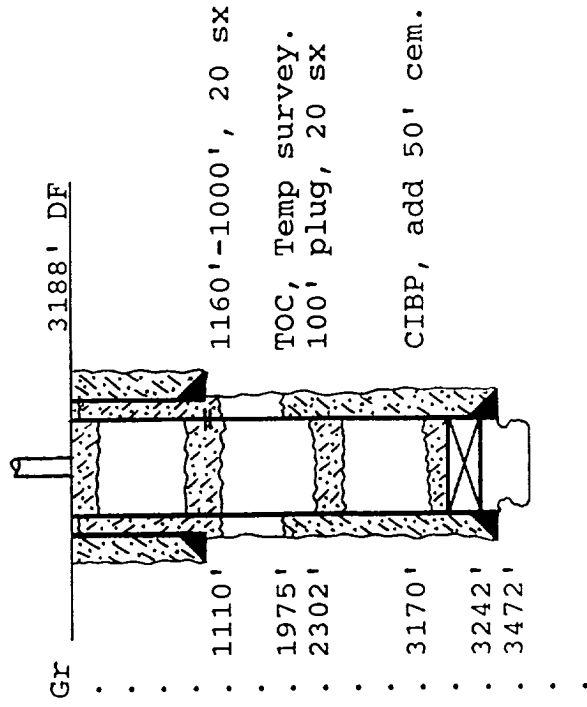

PLUGGING DATA

Surface Plug:

Size 100'-surf. Cemented with 20 sx.
1160'-1000'
 170 sx in annulus + 5 sx from surface.

Class 'H' Cement, 1.18 cu ft/ sx

Intermediate Plug(s):

Size 2352'-2252' Cemented with 20 sx.

Class 'H' cement, 1.18 cu ft/ sx
 Surface plug covers top of salt section.
 Intermediate plug covers base of salt.

Producing Zone Plugs:

Size CIBP, 50' Cemented with 10 sx.

Plugged and Abandoned 6-5/6-91 by DA&S Well Service.