

N.

Revised 7/1/53)
(Form C-105)

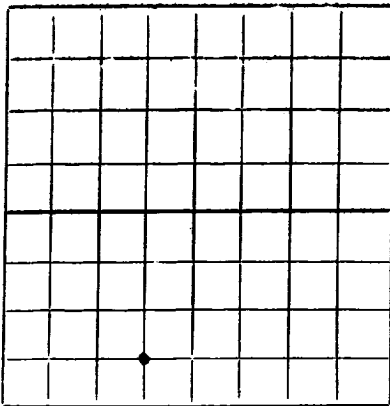
NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

C O P Y

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPPLICATE.

AREA 640 ACRES
LOCATE WELL CORRECTLYW-G Company Box 1636, Hobbs, New Mexico
(Company or Operator)

E. E. Jacks

(Lease)

Well No. B-1, in SE $\frac{1}{4}$ of SW $\frac{1}{4}$ of Sec. 26, T. 24S, R. 37E, NMPM.

Langle-Mattis Pool, Lea County.

Well is 660 feet from south of North line and 1980 feet from east of West line of Section 26. If State Land the Oil and Gas Lease No. is 032326-B.

Drilling Commenced 1-3, 1949. Drilling was Completed 2-9, 1949.

Name of Drilling Contractor R. L. Kirkwood

Address Alice, Texas

Elevation above sea level at Top of Tubing Head. The information given is to be kept confidential until January, 1950.

OIL SANDS OR ZONES

No. 1, from 3413 to 3450. No. 4, from to.
No. 2, from to. No. 5, from to.
No. 3, from to. No. 6, from to.

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from None to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
10-3/4	42	New	258	Baker			Surface
5 1/2	14	"	3275	"			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
13-3/4	10-3/4	258	150	Halliburton		
7 1/4	5 1/2	3275	500	Halliburton		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

2-6-49 - 320 qts Glycerine, 3 1/2 Shell, shot at 3310-3470, cleaned out to 3525.

Result of Production Stimulation Increase gas from 1,050,00 cu ft to 2,000,000 cu ft with
spray oil - approx 12 bbl per day

Depth Cleaned Out 3525

1 **ORD OF DRILL-STEM AND SPECIAL TESTS**

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from 0 feet to 3524 feet, and from feet to feet.
Cable tools were used from feet to feet, and from feet to feet.

PRODUCTION

Put to Producing 2-19, 19 49

OIL WELL: The production during the first 24 hours was 12 barrels of liquid of which 100 % was
was oil; none % was emulsion; none % water; and none % was sediment. A.P.I.
Gravity 36

GAS WELL: The production during the first 24 hours was 2,000 M.C.F. plus barrels of
liquid Hydrocarbon. Shut in Pressure 589 lbs.

Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico

Northwestern New Mexico

T. Anhy. 932	T. Devonian	T. Ojo Alamo
T. Salt 1048	T. Silurian	T. Kirtland-Fruitland
B. Salt 2350	T. Montoya	T. Farmington
T. Yates	T. Simpson	T. Pictured Cliffs
T. 7 Rivers	T. McKee	T. Menefee
T. Queen 3413	T. Ellenburger	T. Point Lookout
T. Grayburg	T. Gr. Wash	T. Mancos
T. San Andres	T. Granite	T. Dakota
T. Glorieta	T.	T. Morrison
T. Drinkard	T.	T. Penn
T. Tubbs	T.	T.
T. Abo	T.	T.
T. Penn	T.	T.
T. Miss	T.	T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	46		surface & caliche	3321	3324		bentinite & lime
46	75		sand	3324	3328		lime
75	84		red bed	3328	3330		broken lime
84	270		red bed & shells	3330	3345		anhydrite & lime
270	932		red bed - hard shells	3345	3355		broken lime
932	949		hard anhydrite	3355	3366		lime
949	1025		any and red bed	3366	3370		gyp
1025	1048		shale with hard shells	3370	3374		gyp & lime
1048	1052		salt	3374	3387		broken lime
1052	1415		salt and any	3387	3411		lime
1415	1438		anhydrite (hard)	3411	3414		sand & lime
1438	1608		salt & gyp	3414	3426		lime with thin breaks
1608	1629		anhydrite	3426	3444		lime & gyp
1629	1903		salt & red bed w/strks any	3444	3448		lime
1903	2350		salt and anhydrite	3448	3470		lime & gyp
2350	2559		anhydrite & gyp	3470	3525		dolomite - TD
2559	2712		anhydrite & lime				
2712	2977		lime				
2712	2977		lime				
2977	3006		gyp & lime				
3006	3294		lime				
3294	3298		bentinite & lime				
3298	3306		lime				
3306	3309		bentinite				
3309	3316		bentinite & lime				
3316	3321		lime				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

(Signed: Fred D. Posey, Jr) 2-19-49
(Date)

Company or Operator W-G Company

Address Box 1636, Hobbs, New Mexico

Name Fred D. Posey, Jr.

Position or Title Sec'y and Treas.