



N.

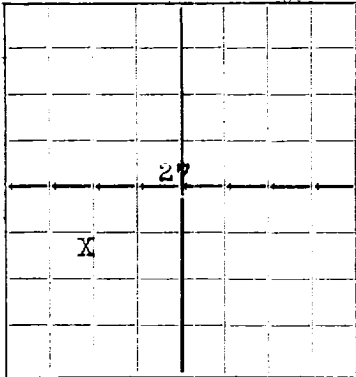


AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico



WELL RECORD

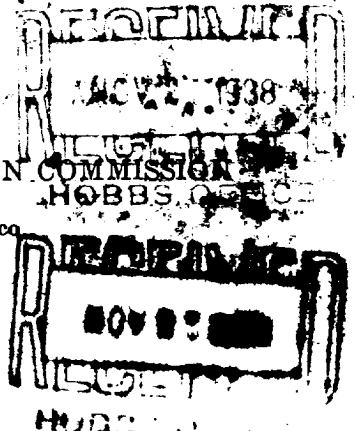

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

DUPLICATE

Amerada Pet Corp P.O. Box # 2040 Tulsa Okla.
Company or Operator Address
R.C. Johnson Well No. 1 in NW-SW-1/4 of Sec. 27 T. 24
Lease
R. 37 N. M. P. M. Lattix Field, Lea County
Well is 1980' feet south of the North line and 660' feet west of the East line of Sec-27-24-37
If State land the oil and gas lease is No. _____ Assignment No. _____
If patented land the owner is R.C. Johnson Address Eunice N.M.
If Government land the permittee is _____ Address _____
The Lessee is _____ Address _____
Drilling commenced Oct-12- 19 38 Drilling was completed Nov-17- 19 38
Name of drilling contractor Sparkman Reusch Drg Co Address Tulsa Okla
Elevation above sea level at top of casing 3206' feet.
The information given is to be kept confidential until _____ 19 _____

OIL SANDS OR ZONES

No. 1, from 3298' to 3402' No. 4, from 3431' to 3437'
No. 2, from 3406' to 3408' No. 5, from 3443' to 3455'
No. 3, from 3416' to 3419' No. 6, from 3458' to 3480'

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from _____ to _____ feet.
No. 2, from _____ to _____ feet.
No. 3, from _____ to _____ feet.
No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
10-3/4"	32.75#	8	L.N.	428'	T.P.			
7"-OD	20#	10	Smls	3285'	Baker Float & Guide Shoe			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
15"	10-5/8"	423'	3009	Halliburton	10.1	
9-7/8"	7"	3285'	250-	Halliburton	10.3	

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
Adapters—Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment _____

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from _____ feet to 3492' feet, and from _____ feet to _____ feet
Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing Nov-17- 19 38
The production of the first 4 hours was 98 barrels of fluid of which 100 % was oil; _____ %
emulsion; _____ % water; and _____ % sediment. Gravity, Be _____
If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. _____

EMPLOYEES

A.L. Reese Driller A.C. Bradford Driller
Otto Trimby Driller Earl Larson Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 25
day of Nov. 19 38
Louis A. Mansue
Notary Public
My Commission expires Dec 21, 1940

Eunice New Mexico Nov-22-1938
Place Date
Name J. L. Lewis
Position Supv
Representing Amerada Pet Corp
Company or Operator
Address Draper-C-Hobbs New Mexico

FORMATION RECORD

FROM	THICKNESS IN FEET	FORMATION
72	72	Caliche & Surface Gravel
78	48	Sand & Gravel
120	15	Red Bed
130	15	Gravel
150	180	Red Bed & Shells
280	45	Gravel & Shale
325	75	Hard Shells & Red Rock
395	44	Red Rock & Red Bed
444	12	Red Rock
456	125	Red Rock-Sand & Shells
581	84	Sand
665	20	Blue Shale & Sand
685	35	Sand
720	80	Hard Sand & Red Rock
800	30	Red Rock & Red Bed
830	135	Red Rock & Red Bed
965	117	Red Rock & Gyp
1082	91	Anhydrite
1173	33	Anhydrite & Gyp
1206	9	Anhydrite & Salt
1215	25	Anhydrite
1240	45	Brown Anhydrite & Red Bed
1285	35	Anhydrite & Brown Sandy Lime
1320	40	Brown Anhydrite & Potash
1360	13	Red Rock
1373	45	Anhydrite & Potash
1418	7	Anhydrite
1425	50	Salt-Anhydrite & Shells
1475	25	Potash & Anhydrite
1500	9	Salt & Shells
1509	19	Anhydrite
1528	168	Anhydrite & Salt
1696	44	Anhydrite-Potash-Salt
1740	48	Salt & Anhydrite
1798	35	Salt
1823	8	Anhydrite & Gyp
1831	11	Salt
1848	18	Salt-Potash & Salt
1860	40	Potash & Anhydrite
1900	93	Anhydrite & Salt
1937	42	Salt & Shells
2035	10	Salt
2045	109	Anhydrite & Salt
2154	46	Anhydrite & Potash
2200	50	Salt & Shells
2250	30	Anhydrite & Salt
2280	20	Anhydrite & Gyp
2300	66	Salt & Anhydrite
2365	70	Anhydrite-Broken
2435	73	Anhydrite-Salt
2508	3	Brown Lime
2511	36	Anhydrite
2547	13	Lime & Gyp
2560	42	Anhydrite & Gyp
2602	10	Gyp
2612	38	Lime & Gyp
2650	8	Brown Lime
2658	772	Lime
3420	55	Sandy Lime
3484	8	Lime
3492		

Total Depth

3482 = 3492 54M

3492'-T.D.

Run 2 1/2" EUE Tubing To 3477' And The Well Flowed
134 Bbls In 8 Hrs On 32/64" Tubing Choke-Gas Volume
201 Thousand-Cst-G.O.R.501