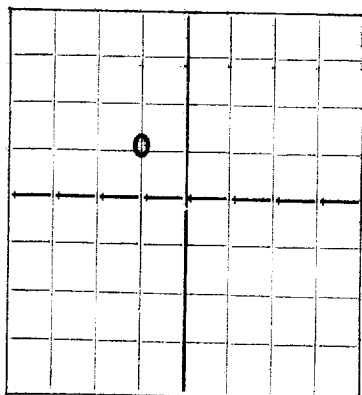



N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD


 AREA 640 ACRES
LOCATE WELL CORRECTLY

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

DUPLICATE

Anderson-Prichard Oil Corp.

Hobbs, N. Mex.

State A 32

Company or Operator

Address

Lease

Well No. 2

in NW

of Sec. 32

T. 24S

R. 37E

N. M. P. M.

Mattix

Field,

Lea

County.

Well is 1980 feet south of the North line and 3300 feet west of the East line of Section 32

If State land the oil and gas lease is No. B-148

Assignment No.

If patented land the owner is

Address

If Government land the permittee is

Address

The Lessee is

Address

Drilling commenced 5-27

19 39

Drilling was completed 6-22

19 39

Name of drilling contractor Uscon Drilling Co.

Address

Okla. City, Okla.

Elevation above sea level at top of casing 3252 feet.

The information given is to be kept confidential until

19

OIL SANDS OR ZONES

No. 1, from 3435

to

3539

No. 4, from

to

No. 2, from

to

No. 5, from

to

No. 3, from

to

No. 6, from

to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from

to

feet.

No. 2, from

to

feet.

No. 3, from

to

feet.

No. 4, from

to

feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
9-5/8	25.7	Welded	Armco	535	Baker			
7	22#	8	Ygstr	3407	HOWCO			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
12-1/4	9-5/8	535	225	HOWCO	11# gallon	Circulated
8-3/4	7	3407	300	do	do	do

PLUGS AND ADAPTERS

Heaving plug—Material

Length

Depth Set

Adapters—Material

Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 3539 feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing 6-23, 19 39

The production of the first 24 hours was 528 barrels of fluid of which 100 % was oil; %

emulsion; % water; and % sediment. Gravity, Be 34

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

Oscar Giles

Driller

C. C. Kinder

Driller

J. S. Galbraith

Driller

Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 27th

day of June, 19 39

 Notary Public
 My Commission expires Feb. 25, 1943

Hobbs, N. Mex.

Date 6-27-39

Name Frank Gray

Position Supt.

Representing Anderson-Prichard Oil Corp.

Address Hobbs, N. Mex.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	208	208	Shale
208	225	17	Sand
225	480	255	Red beds
480	535	55	Bedrock
535	565	30	Red beds & bedrock
565	597	32	Lime & shells
597	797	200	Sand, shale, & red beds
797	1120	323	Red beds & bedrock
1120	1365	245	Anhydrite
1365	2525	1360	Salt & anhydrite
2525	2550	25	Anhydrite
2550	2640	90	Salt
2640	2705	65	Salt & anhydrite
2705	2747	42	Anhydrite & Gyp
2747	2902	155	Lime
2902	2920	18	Sandy lime
2920	2965	45	Lime
2965	2996	31	Sandy lime
2996	3182	186	Lime
3182	3192	10	Sand
3192	3324	132	Lime
3324	3375	51	Sandy lime
3375	3480	105	Lime
3480	3511	31	Lime & sand
3511	3539	28	Lime