


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

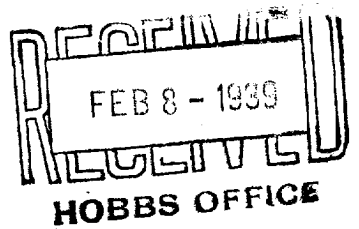

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

DUPLICATE

AREA 640 ACRES
LOCATE WELL CORRECTLY

North Shore Corporation

Midland, Texas

Company or Operator

Address

Wellworth

Well No. 2

in N/W

of Sec. 35

T. 24-S

Lease

R. 37, N. M. P. M., Vattix Field, Lee County.

Well is 3310 feet south of the North line and 3310 feet west of the East line of Sec. 35

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is Lee Wellworth, Address

If Government land the permittee is, Address

The Lessee is North Shore Corporation, Address Midland, Texas

Drilling commenced 12-20-38 19 Drilling was completed 1-2-39 19

Name of drilling contractor Davidson Dr. Co., Address Ft. Worth, Texas

Elevation above sea level at top of casing 3250 feet.

The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 3407 to 3402 No. 4, from 3520 to 3525

No. 2, from 3470 to 3470 No. 5, from 3530 to 3530

No. 3, from 3401 to 3500 No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
3 1/2"	30	8	Davidson	13.55	Ballin				Salt string
3 1/2"	30	8	"	17.40	"				Oil string

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
11"	6 3/8	1385	400			
8"	4"	1340	250			

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

Not necessary, well came in natural.

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary

Rotary tools were used from feet to feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing 12.1, 1939

The production of the first 24 hours was 1680 barrels of fluid of which 30% was oil; %

emulsion; % water; and % sediment. Gravity, Be 40

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

Contracted to Davidson Dr. Co.

Driller Driller

Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 7th

day of February 1939

Mrs. M. M. Cain
Notary Public

My Commission expires 6-1-39

Midland, Texas, Feb. 7, 1939
Place Date

Name Madeline Cole

Position Secretary

Representing North Shore Corporation

Company or Operator

Address Midland, Texas

FORMATION RECORD

FM	TO	THICKNESS IN FEET	FORMATION
0	400	400	Red Rock
400	500	100	Red Rock & Sand
500	1150	650	Red Rock
1150	1255	75	Anhy.
1255	1350	100	Salt
1350	1400	50	Anhy.
1400	1600	400	Salt
1600	2000	200	Salt & Anhy
2000	2400	400	Salt
2400	2500	100	Salt & Anhy
2500	2600	100	Salt
2600	2710	20	Salt
2710	2800	20	Salt & Anhy
2800	2820	20	Brown Line
2820	2850	30	Salt & Anhy
2850	2870	20	Anhy
2870	2900	30	Anhy. & Sand
2900	2920	20	Salt
2920	3000	50	Salt, line & Sand
3000	3020	20	Salt & line
3020	3110	50	Salt (Gas)
3110	3140	20	Grey Line
3140	3350	210	Line & Anhy.
3350	3457	107	Line & Sand (Show Oil)
3457	3462	5	Sand
3462	3479	15	Grey Line
3479	3491	10	" "
3491	3508	17	Grey Line (Show Oil)
3508	3520	10	Grey Line
3520	3525	5	Brown Sand, show oil
3525	3528	3	Grey Line and Sand
3528	3535	7	Grey Line, show oil
3535	3550	15	Grey Line
			Grey & Brown Line, show oil W.