

John Copps

▼ **RKOVER PROCEDURE**

DATE: 1/30/92

WELL & JOB: EATON B-1 WN #1

DRILLED: 1946

LAST WORKOVER:

FIELD: JUSTIS

COUNTY: LEA COUNTY, NM.

BY: G.D. HOLEMAN

TD: 4919'

PBD: 4848'

DATUM: 10'

TUBINGHEAD:

SIZE:

PRESS RATING:

| CASING: | <u>SIZE</u> | <u>WEIGHT</u> | <u>GRADE</u> | <u>SET @</u> | <u>SX CMT</u> | <u>TOC</u> |
|----------|-------------|---------------|--------------|--------------|---------------|------------|
| SURFACE: | 13-3/8" | 32# | | 290' | 250 | SURF. |
| INTER: | 8-5/8" | 32# | | 2316' | 500 | UNKNOWN |
| PROD: | 5-1/2" | 15# | | 4875' | 450 | 2630' TS |

| LINER: | <u>SIZE</u> | <u>WEIGHT</u> | <u>GRADE</u> | <u>TOP</u> | <u>BTM</u> | <u>TO</u> |
|---------------|-------------|---------------|--------------|------------|------------|-----------|
| PERFORATIONS: | 4826'-4844' | | | | | |

| | | | | |
|---------------|--------------|--------------|-----------------------------|-----------------|
| TUBING: | SIZE: 2-3/8" | WEIGHT: 4.7# | GRADE: | THREAD: EUE 8RD |
| BTM'D @ 4821' | | JOINTS: 156 | MISC: SN AND PERF SUB W/ BP | |

PACKER AND MISC:

HISTORY AND BACKGROUND:

SCOPE OF WORK: PLUG AND ABANDON

PROCEDURE


1. NOTIFY NMOCD @ 505-393-6161 IN SUFFICIENT TIME TO WITNESS P& A.
2. MIRU PU. ND TREE NU BOPE. RIH AND TAG PBTD @ 4848'. STRAP OUT OF HOLE W/ 2-3/8" TBG.
3. RU WL. RUN GR & JB TO 4800'. RIH W/ CIBP & SET @ 4700'.
4. RIH W/ 2-3/8" TBG OE TO 4700' (+-) . CIRC HOLE W/ 9.5 PPG BW W/ SALT GEL FOR 38-40 VIS. SPOT 35' CEMENT ON TOP OF CIBP @ 4700'.
5. POH W/ 2-3/8" TBG STANDING BACK 2680' (+-) AND LD REMAINDER.
6. RU WL. SET CIBP @ 3650' AND DUMP BAIL 35' CEMENT ON TOP.
7. RIH W/ 2-3/8" TBG TO 2680'. SPOT 100' CEMENT PLUG F/ 2680-2580' INSIDE 5-1/2" CSG. (10 SX)
8. PULL UP TO 1070'. SPOT 100' CEMENT PLUG F/ 1070'-970' IN 5-1/2" CSG. (10 SX) POH LD 2-3/8" TBG.
9. RU WL. RIH AND PERFORATE 2 HOLES THRU 5-1/2" AND 8-5/8" CASINGS @ 350'.
10. CLOSE BLIND RAMS AND ATTEMPT TO ESTABLISH CIRC DOWN 5-1/2" CSG AND OUT 5-1/2" X 8-5/8" ANNULUS AND OUT 8-5/8" X 13-3/8" ANNULUS.
 - IF CIRC IS ESTABLISHED. RU CEMENTERS AND CEMENT CSG AND ANNULUSES W/ 275 SX (+-) CLASS "C" NEAT. CIRC CEMENT TO SURFACE.
 - IF ANNULUSES WILL NOT CIRCULATE. RIH W/ 2-3/8" TBG TO 400' AND SPOT 20 SX CLASS "C" NEAT CEMENT PLUG F/ 400'-200'. POH W/ 2-3/8" TBG. RU WL. PERFORATE 2 HOLES @ 150'. ATTEMPT TO ESTABLISH CIRC BETWEEN 5-1/2" X 8-5/8" AND 8-5/8" X 13-3/8" ANNULUSES W/ 120 SX CLASS "C" NEAT CEMENT. CIRC CEMENT TO SURFACE.
11. ND BOPE. CUT OFF WELLHEAD EQUIPMENT AND INSTALL DRY HOLE MARKERS.

GARY HOLEMAN
PERMIAN TEAM DRILLING GROUP

CONCUR

[Signature]

EATON B-1 WN #
1980' FNL & 660' FWL
SECTION 12-T25S-R37E
LEA COUNTY, NEW MEXICO

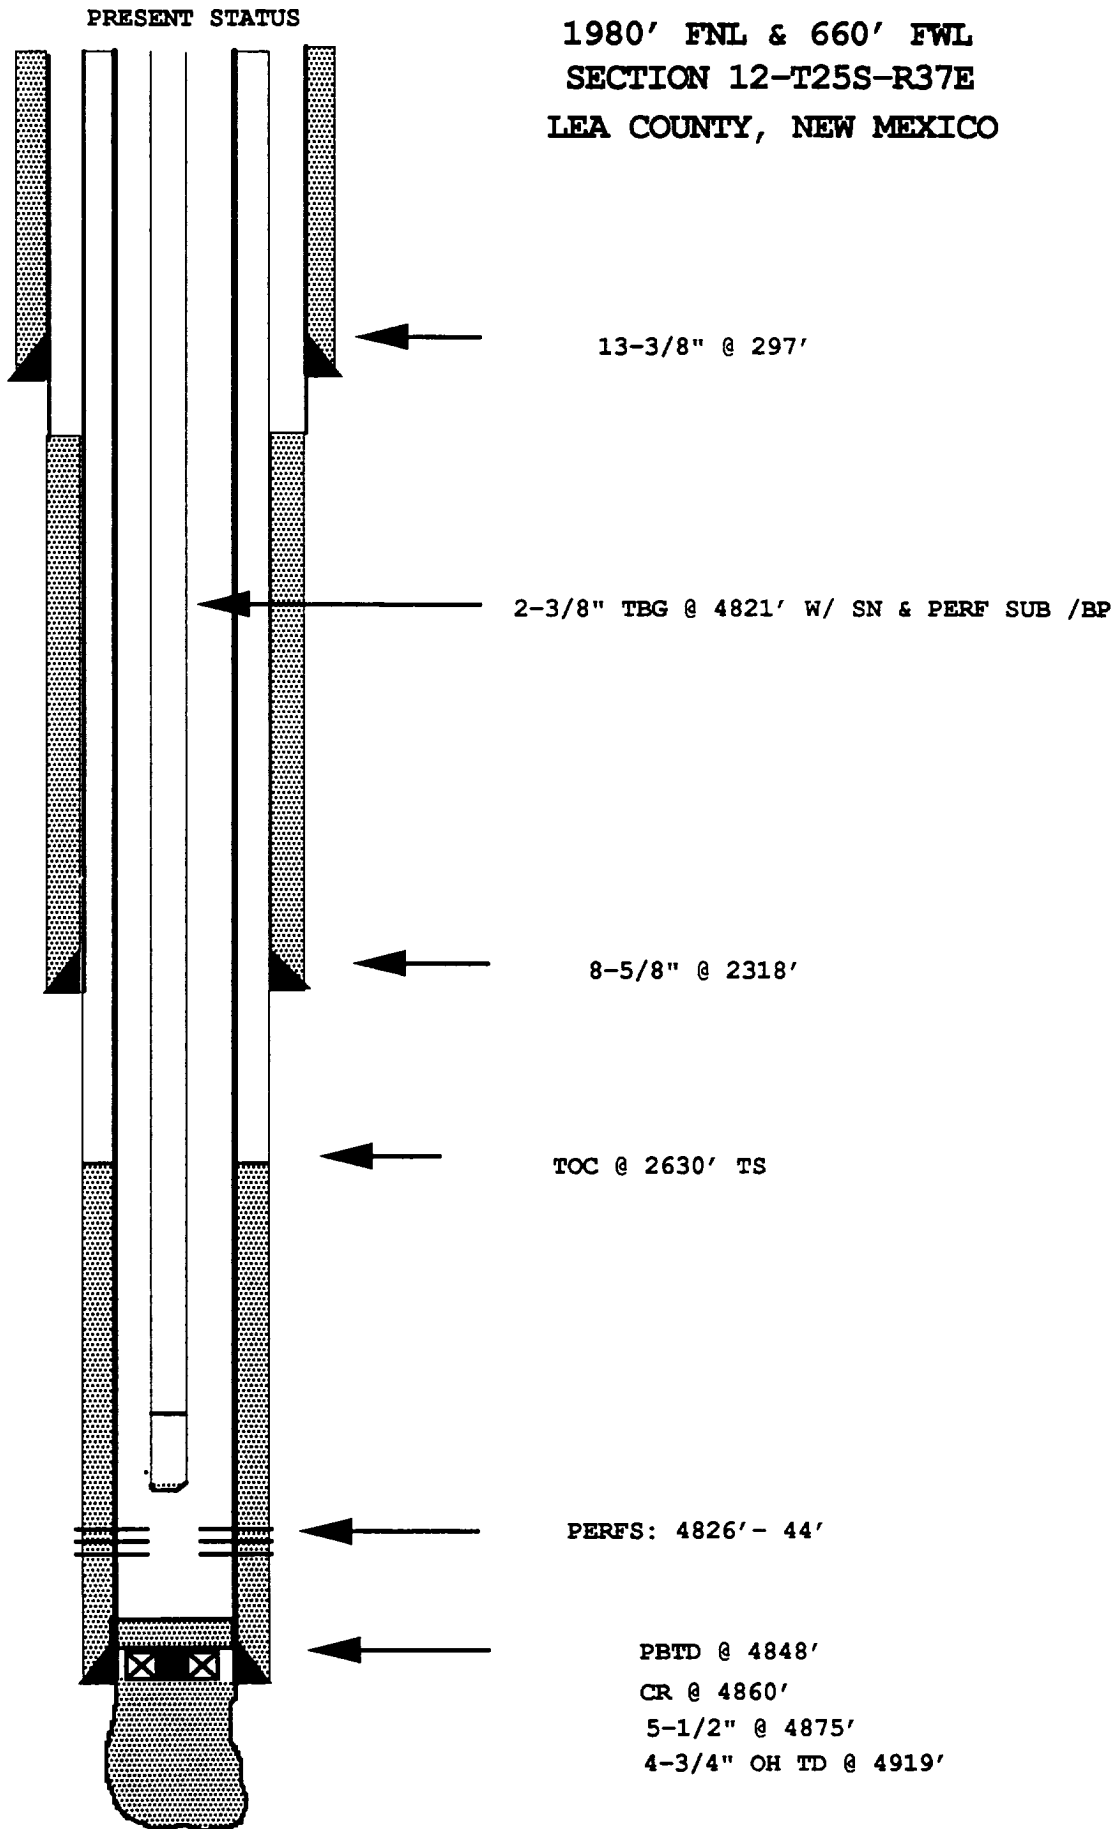

EATON B-1 WN #
 1980' FNL & 660' FWL
 SECTION 12-T25S-R37E
 LEA COUNTY, NEW MEXICO

