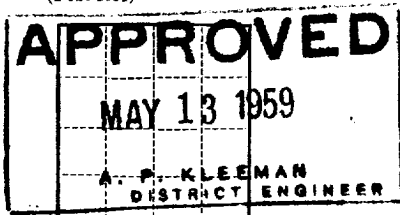


HOBBS

(SUBMIT IN TRIPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEYBudget Bureau No. 42-R358.4.
Approval expires 12-31-60.Land Office **New Mexico**
Lease No. **0766**
Unit **Blocker****RECEIVED****MAY 13 1959****SUNDRY NOTICES AND REPORTS ON WELLS****HOBBS, NEW MEXICO**

| | | | |
|--|-------------------------------------|--|--|
| NOTICE OF INTENTION TO DRILL | <input checked="" type="checkbox"/> | SUBSEQUENT REPORT OF WATER SHUT-OFF | |
| NOTICE OF INTENTION TO CHANGE PLANS | | SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING | |
| NOTICE OF INTENTION TO TEST WATER SHUT-OFF | | SUBSEQUENT REPORT OF ALTERING CASING | |
| NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL | | SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR | |
| NOTICE OF INTENTION TO SHOOT OR ACIDIZE | | SUBSEQUENT REPORT OF ABANDONMENT | |
| NOTICE OF INTENTION TO PULL OR ALTER CASING | | SUPPLEMENTARY WELL HISTORY | |
| NOTICE OF INTENTION TO ABANDON WELL | | | |

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

Well No. **5** is located **2310** ft. from **N** line and **750** ft. from **E** line of sec. **13**
SW/4 SW/4 Sec. 13 **25S** **37E** **N. M. P. M.**
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)
Justin Drinkard **Lea** **New Mexico**
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is **3085** ft.**DETAILS OF WORK**

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

We propose to drill this well to a TD of 6100'. 13 3/8" casing will be set at approximately 550' and cement circulated to surface. 9 5/8" or 8 5/8" casing will be set at approximately 3400' with BV tool at approximately 1000'. Cement will be pumped around bottom of casing to bring cement to BV tool and cement will be pumped through BV tool to bring cement to bottom of 13 3/8" casing. A 5 1/2" production string will be run to TD. Sufficient cement will be calculated to bring cement around production string to bottom of 9 5/8" or 8 5/8" casing.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company **Anderson-Prichard Oil Corp.**Address **Box 196****Midland, Texas**By Title **District Superintendent**

FOUO

APPROVED
MAY 11 2004
U.S. DEPARTMENT OF JUSTICE
FEDERAL BUREAU OF INVESTIGATION

TO : DIRECTOR, FBI
FROM : SAC, NEW YORK
SUBJECT: [Illegible]

RE: [Illegible]
[Illegible]
[Illegible]

[Illegible]

[Illegible]

[Illegible]

[Illegible]

[Illegible]

[Illegible]

[Illegible]

[Illegible]

[Illegible]

[Illegible]

[Illegible]