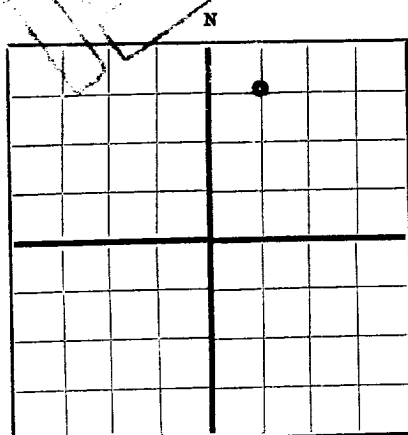


COPY

FORM C-105

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Dalport Oil Corporation

1304 Magnolia Bldg. Dallas, Texas

Company or Operator

Address

Winters

Well No.

1

in

NW/NE

of Sec.

18

T.

25S

Lease

R. 37E

N. M. P. M.

Cooper-Jal

Field,

Lea

County.

Well is 660

feet south of the North line and

1980

feet west of the East line of

Sec. 18

If State land the oil and gas lease is No.

Assignment No.

If patented land the owner is

Mrs. E. C. Winters

Address

Jal, N. Mex

If Government land the permittee is

Address

The Lessee is

Address

Drilling commenced

4-23

19 52

Drilling was completed

5-5

19 52

Name of drilling contractor

Trinity Drilling Company

Address

Dallas, Texas

Elevation above sea level at top of casing

3113

feet.

The information given is to be kept confidential until

19

OIL SANDS OR ZONES

No. 1, from 2775

to

2938

No. 4, from

to

No. 2, from

to

No. 5, from

to

No. 3, from

to

No. 6, from

to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from

to

feet.

No. 2, from

to

feet.

No. 3, from

to

feet.

No. 4, from

to

feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
10 $\frac{3}{4}$ "	32.75	8	Spang	303	Guide				Surface
7"	20	8	"	2775	Float				Production
2"	4.70	8	"	2842					

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
12 $\frac{1}{2}$ "	10 $\frac{3}{4}$ "	303	200	Halliburton		
8 $\frac{3}{4}$ "	7"	2775	400	"		

PLUGS AND ADAPTERS

Heaving plug—Material

Length

Depth Set

Adapters — Material

Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

Hydrafrac from 2775 to 2938 1500 gals

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 2938 feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing 5-8 19 52

The production of the first 24 hours was barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be.

If gas well, cu. ft. per 24 hours 5,000 MCF Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in. 852

EMPLOYEES

W. D. Welch

Driller

G. W. Riddle

Driller

J. H. Cullum

Driller

Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 13th

day of May 19 52

Winnie McLaughlin
Notary Public

My Commission expires 6-1-53

Dallas, Texas

5-13-52

Name W. D. Welch

Position Vice-President

Representing Dalport Oil Corporation

Company or Operator

Address 1304 Magnolia Bldg. Dallas, Texas

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	275	275	Surface sand and red bed
275	314	39	Red Bed
314	325	11	Sand
325	535	210	Sand
535	650	115	Sand and red bed
650	835	185	Sand, red bed and shells
835	964	129	Red bed and anhydrite
964	1140	176	Red bed and anhydrite and shale
1140	1206	66	Red bed, anhydrite and lime
1206	1420	214	Anhydrite and lime
1420	1540	120	Lime and anhydrite
1540	1745	205	Lime, Anhydrite and salt
1745	2107	362	Anhydrite, lime and salt
2107	2150	43	Anhydrite and lime
2150	2265	115	Anhydrite, lime and gyp
2265	2345	80	Anhydrite, lime, red bed, salt
2345	2435	90	Anhydrite, lime and salt
2435	2466	31	Anhydrite and lime
2466	2579	113	Anhydrite, lime and salt streaks
2579	2880	301	Lime, anhydrite and sand
2880	2896	16	Sand
2896	2937-8	41	Sand lime - total depth