

COPY TO O. C. C.

Budget Bureau No. 42-R358.4.  
Approval expires 12-31-60.


Form 9-331a  
(Feb. 1951)

**MOBBS**  
(SUBMIT IN TRIPLICATE)

Land Office **New Mexico**

Lease No. **0766**

Unit **Carlson "C"**

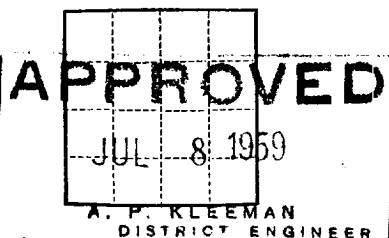

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

RECEIVED

JUL 7 1959

SUNDRY NOTICES AND REPORTS ON WELLS

U. S. GEOLOGICAL SURVEY

MOBBS, NEW MEXICO

NOTICE OF INTENTION TO DRILL.....	<input checked="" type="checkbox"/>	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....		SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....		SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....		SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....		SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

July 7, 1959

Well No. 1 is located 1650 ft. from N line and 330 ft. from E line of sec. 26

SE/4 NE/4 Sec. 26 25 S 37 E N.M.P.M.

(1/4 Sec. and Sec. No.)

(Twp.)

(Range)

(Meridian)

Justis Blinebry & Drinkard Lea New Mexico

(Field)

(County or Subdivision)

(State or Territory)

The elevation of the derrick floor above sea level is 3080 ft.

DETAILS OF WORK

(State names of and expected depths of objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

We propose to drill this well to a TD of 6050'. 13-3/8" 48# casing will be set at approximately 850' and cement circulated to surface. 12-1/4" hole will be drilled to 3300'. If gas is encountered in Yates and Queen 9-5/8" 36# casing will be set at approximately 3300' and cement will be brought to base of the surface casing. If no gas is encountered hole size will be reduced to 8-3/4" and drilling continued to TD. 7" 20# and 23# will be set at approximately 6050' and sufficient cement calculated to bring cement back to the surface casing. Dual completion will be made in the Blinebry and Drinkard through two parallel strings of tubing.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Anderson-Frithard Oil Corporation

Address Box 196

Midland, Texas

By

*L. H. Brown*

Title Sr. Petroleum Engineer