


N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

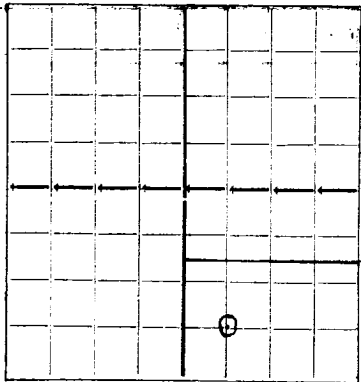

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Woodley Petroleum Company

Box 1403, Houston, Texas.

Wm. Cook

Company or Operator

Well No. 1

in SE 1/4

of Sec. 28

T. 25

R. 37

N. M. P. M.

Jal

Field,

Lea

County.

Well is 1980 feet south of the North line and 1980 feet west of the East line of SE 1/4 Section 28

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is Wm. Cook Address

If Government land the permittee is Address

The Lessee is Address

Drilling commenced July 14 1937 Drilling was completed August 5 1937

Name of drilling contractor Two States Drilling Co. Address Dallas, Texas.

Elevation above sea level at top of casing 3015 feet.

The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 3140 to 3165 No. 4, from to
No. 2, from 3185 to 3200 No. 5, from to
No. 3, from 3205 to 3229 No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
10-3/4	32#	8		250'	Texas	Pattern		
7-5/8	29.7#	8		1213'	Texas	Pattern		
5-1/2	17#	10		3136'	Baker			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
12"	10-3/4	250'	150	Halliburton		
8"	7-5/8	1213'	300	Halliburton		
6"	5-1/2	3136'	250	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Acid	1000 Gal.	8/6/37	3229	

Results of shooting or chemical treatment Increased production from 5 barrels per hour to 30 barrels per hour.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from Surface feet to 3229 Bottom of Hole feet to feet
Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing August 6 1937
The production of the first 24 hours was 121 barrels of fluid of which 100 % was oil; No % emulsion; No % water; and No % sediment. Gravity, Be Jal Gravity
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in. 1125#

EMPLOYEES

Two States Drilling Co. - Contractors
Driller Driller
Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 9

day of Aug 19 37

Patricia Mahoney
Notary Public

My Commission expires 10-24-39

Signature
Name David Swane
Position Superintendent
Representing Woodley Petroleum Co.
Company or Operator
Address Box 1403, Houston, Texas.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	195	195	Surface Sand & Rock
195	215	20	Red Bed
215	355	140	Sand Rock
355	544	189	Sand & Red Rock
544	910	366	Red Bed & Shells
910	952	42	Red Rock & Anhydrite
952	1183	231	Red Bed with Streaks Anhydrite & Potash
1183	1215	32	Anhydrite
1215	1812	597	Anhydrite & Salt
1812	1988	176	Anhydrite, Salt & Shells
1988	2115	127	Anhydrite, Salt & Gypsum
2115	2295	180	Anhydrite & Salt
2295	2345	50	Anhydrite & Lime
2345	2540	195	Lime
2540	3102	562	Lime
3102	3165	63	Sandy Lime
3165	3229	64	Lime & Sandy Lime