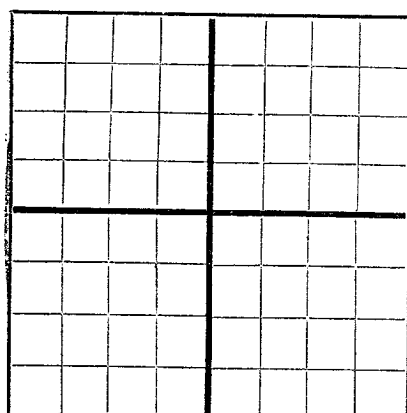


N

AREA 640 ACRES
LOCATE WELL CORRECTLYNEW MEXICO OIL CONSERVATION COMMISSION OFFICE
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

R. Olsen Oil Company Box 1, Jal, New Mexico
Company or Operator Address
Winningham Well No. **3** in **NE SE** of Sec. **30**, T. **25S**
Lease
R. **37E**, N. M. P. M. **Cooper-Jal** Field, **Lea** County.
Well is **1930** feet **North** of the **South** line and **330** feet west of the East line of **Section 30**
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is Address
If Government land the permittee is Address
The Lessee is **R. Olsen Oil Company** Address **Oklahoma City, Oklahoma**
Drilling commenced **April 1, 1950** 19 Drilling was completed **April 17, 1950** 19
Name of drilling contractor **Olsen-Blount Drilling Corp.** Address **Oklahoma City, Oklahoma**
Elevation above sea level at top of casing feet.
The information given is to be kept confidential until **Now** 19.

OIL SANDS OR ZONES

No. 1, from **None** to No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from **None** to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
9-5/8	36	8	Nat'l	295	Howco				Surface
7	24	8	"	2664	"				Oil String

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
2 1/2	9-5/8	295	200	Howco		
3-3/4	7	2664	300	"		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from **0** feet to **2844 TD** feet, and from feet to feet
Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing **April 17, 1950** 19
The production of the first 24 hours was barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be.
If gas well, cu. ft. per 24 hours **6,000,000** Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in. **1507**

EMPLOYEES

Ladall Elias Driller **C. C. Hackelma** Driller
Arthur Stine Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this **23**day of **April**, 19 **50****B. L. Chockley**
Notary PublicMy Commission expires **October 31, 1950****Jal, New Mexico** **April 25, 1950**Name **W. M. Leach**Position **Geologist**Representing **R. Olsen Oil Company**Address **Box 1, Jal, New Mexico**

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
205	245	40	Red Bed & Sand
245	310	65	Red Bed
310	470	160	Red Bed & Sand
470	930	460	Red Bed
930	1047	117	Red Bed, Sand & Lime
1047	1223	176	Sandy Lime
1223	1363	140	Red Bed & Anhy
1363	1456	92	Salt & Anhy
1456	2456	1001	Anhy & Salt
2456	2556	99	Anhy & Salt
2556	2607	52	Salt, Anhy & Lime
2607	2665	58	Lime
2665	2812	147	Lime
2812	2944	32	Sand & Lime TD