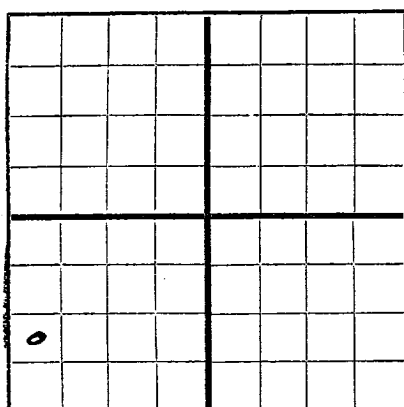


N

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Culbertson & Irwin, Inc.

Box 1071, Midland, Texas

Company or Operator

Address

Dabbs

Well No. 1

in SW/4 SW/4 of Sec. 34

T. 25S

Lease

R. 37E

N. M. P. M.

Langlie-Mattix

Field,

Lea

County.

Well is 4290 feet south of the North line and 4950 feet west of the East line of Section 34

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is C. H. Cooper Address Jal, New Mexico

If Government land the permittee is Address

The Lessee is Address

Drilling commenced November 13 19 48 Drilling was completed December 27 19 48

Name of drilling contractor Roach & Shepard Address Artesia, New Mexico

Elevation above sea level at top of casing 3002 feet.

The information given is to be kept confidential until Not confidential 19

GAS

SANDS OR ZONES

No. 1, from 2717 to 2725 No. 4, from to

No. 2, from 2750 to 2785 No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 140 to 145 feet.

No. 2, from 1026 to 1045 feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
12 1/2"	45		Used	157'	T.P.				Surface
7"	24	8	"	2546'	Float				Prod. String

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
15 1/2"	12 1/2"	157	100	Halliburton	(Cement circulated)	
8"	7"	2547	300	"	(Circulated)	

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet

Cable tools were used from 0 feet to 2852 feet, and from feet to feet

PRODUCTION

Put to producing December 28 19 48 GAS WELL

The production of the first 24 hours was barrels of fluid of which % was oil; %

emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours 7,820,000 Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in. 800

EMPLOYEES

O. E. Wood Driller J. M. Homer Driller

H. Kickman Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 6th

day of January 19 49

Dorene Elledge

Dorene Elledge

Notary Public

My Commission expires June 1, 1949

Midland, Texas Jan. 6, 1949

Name

Position President

Representing Culbertson & Irwin, Inc.

Address Box 1071, Midland, Texas

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	65	65	Sand
65	145	80	Sand - water 140-145
145	245	100	Red rock
245	280	35	Sand
280	335	55	Sdy shale
335	390	55	Shale and sand
390	410	20	Sdy shale
410	430	20	Blue and red shale
430	480	50	Red rock and gray shale
480	815	335	Red rock
815	825	10	Anhydrite
825	898	73	Red rock
898	925	27	Anhydrite
925	930	5	Red rock
930	1026	96	Anhydrite
1026	1045	19	Sand - water
1045	1050	5	Red rock
1050	1063	13	Anhydrite
1063	1075	12	Anhydrite and red rock
1075	1155	80	Anhydrite, salt and red rock
1155	1240	85	Salt and potash
1240	1280	40	Anhydrite
1280	1335	55	Salt and anhydrite
1335	1350	15	Salt
1350	1390	40	Anhydrite
1390	1505	115	Salt and anhydrite
1505	1565	60	Salt
1665	1695	30	Anhydrite
1695	1735	40	Salt and anhydrite
1735	1870	135	Salt
1870	1940	70	Salt and anhydrite
1940	1955	15	Salt
1955	1995	40	Anhydrite
1995	2015	20	Salt
2015	2110	95	Anhydrite
2110	2215	105	Anhydrite
2215	2410	195	Salt
2410	2480	70	Anhydrite
2480	2560	80	Brown lime and anhydrite
2560	2660	100	Sand, lime and anhydrite
2660	2685	25	Sand
2685	2715	30	Lime
2715	2750	35	Lime and sand
2750	2785	35	Sand
2785	2852	67	Shale and lime

T.D. 2852