

N.

Orig: 4

OCC

VDA

JTR

EGC

HME

PDD

F

(Revised 7/1/88)
(Form C-108)

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE.

AREA 640 ACRES
LOCATE WELL CORRECTLYSinclair Oil & Gas Company
(Company or Operator)

L. E. Vance

(Lease)

Well No. 2, in NE 1/4 of SW 1/4, of Sec. 20, T. 24 S., R. 34 E., NMPM.

Dollarhide-Drinkard

Pool,

Lea

County.

Well is 1980 feet from South line and 2310 feet from East line

of Section 30-24E-38. If State Land the Oil and Gas Lease No. is

Drilling Commenced 5-21, 1953 Drilling was Completed 7-2, 1953

Name of Drilling Contractor Captain Drilling Company

Address Odessa, Texas

Elevation above sea level at Top of Tubing Head 3110 The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 3680 to 3770 No. 4, from to

No. 2, from 6470 to 6570 No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
13 3/8	43	N	301	Larkin			
8 5/8	32 & 24	N	3161	"			
5 1/2	17 & 15.5	N	6837	"			
2 3/8	4.7	N	6470				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17	13 3/8	304	300	Halliburton		
11	8 5/8	3163	2900	"		
7 7/8	5 1/2	6837	450	"		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Treated 11,000 gal., 1,000 Gal., 5,000 Gal., and 10,000 gal. 15 Anisol acid

Result of Production Stimulation after 1,000 Gal., no show, after 2,000 Gal., 70 bbl. of new oil in 9 hrs.
after 5,000 Gal., 99 bbl. new oil in 20 hrs., after 10,000 Gal., potential test of 228 bbl.
in 24 hrs. Depth Cleaned Out 6808

mp

REPORT OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from Surface feet to 7000 feet, and from feet to feet.
Cable tools were used from None feet to feet, and from feet to feet.

PRODUCTION

Put to Producing July 15, 1953

OIL WELL: The production during the first 24 hours was 523 barrels of liquid of which 100% was oil; % was emulsion; % water; and % was sediment. A.P.I. Gravity 40

GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of liquid Hydrocarbon. Shut in Pressure lbs.


Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico		Northwestern New Mexico	
T. Anhy		T. Devonian	T. Ojo Alamo
T. Salt		T. Silurian	T. Kirtland-Fruitland
B. Salt	2520	T. Montoya	T. Farmington
T. Yates	2770	T. Simpson	T. Pictured Cliffs
T. 7 Rivers	2940	T. McKee	T. Menefee
T. Queen	3650	T. Ellenburger	T. Point Lookout
T. Grayburg		T. Gr. Wash	T. Mancos
T. San Andres		T. Granite	T. Dakota
T. Glorieta		T.	T. Morrison
T. Drinkard	5610	T.	T. Penn.
T. Tubbs	6100	T.	T.
T. Abo		T.	T.
T. Penn		T.	T.
T. Miss		T.	T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	90	90	Caliche & Sand	6760	6760	2272	Lime
90	157	67	Bedbed	6760	6770	10	Lime & Shale
157	246	89	Bedbed & Conglomerate	6770	7000	230	Lime
246	300	54	Bedbed & lime				
300	779	479	Bedbed				
779	993	214	Anhydrite & Shale				
993	1145	147	Bedrock				
1145	1250	105	Bedbed & Salt				
1250	1754	504	Anhydrite & Salt				
1754	1959	205	Salt				
1959	2628	669	Anhydrite & Salt				
2628	2685	57	Anhydrite				
2685	2742	57	Anhydrite & Cyp				
2742	2766	24	Anhydrite & Shale				
2766	2910	144	Anhydrite				
2910	2952	42	Lime				
2952	3154	202	Anhydrite & Lime				
3154	3293	139	Lime				
3293	3369	76	Sandy lime				
3369	3646	277	Lime				
3646	3713	72	Sandy lime				
3713	4113	400	Lime				
4113	4244	131	Sandy lime				
4244	4315	71	Lime				
4315	4439	124	Sandy lime				

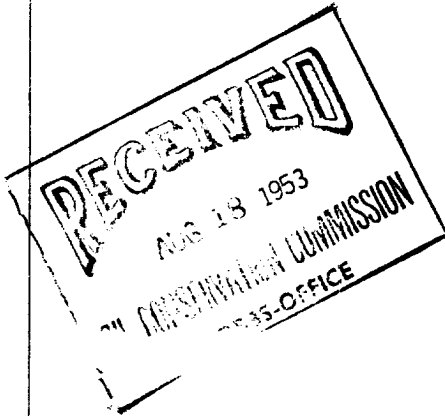

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

August 12, 1953
Company or Operator Sinclair Oil & Gas Co. Address Box 1927 Hobbs, New Mexico
Name [Signature] Position or Title Dist. Supt.