

Orig: &amp; cc: OCC

cc: FHR

JTR

P

## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

## MISCELLANEOUS REPORTS ON WELLS

Submit this report in TRIPLICATE to the District Office, Oil Conservation Commission, within 10 days after the work reported is completed. It should be signed and filed as a report on Beginning Drilling Operations, Results of test of casing shut-off, result of plugging of well, result of well repair, and other important operations, even though the work was witnessed by an agent of the Commission. See additional instructions in the Rules and Regulations of the Commission.

## Indicate Nature of Report by Checking Below

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON RESULT OF TEST OF CASING SHUT-OFF	<input checked="" type="checkbox"/>	REPORT ON REPAIRING WELL	
REPORT ON RESULT OF PLUGGING WELL		REPORT ON RECOMPLETION OPERATION		REPORT ON (Other)	

February 13, 1955

(Date)

Hobbs, New Mexico

(Place)

Following is a report on the work done and the results obtained under the heading noted above at the

Sinclair Oil &amp; Gas Company

(Company or Operator)

Leslie E. Vance

(Lease)

J. C. Grain Drilling Company

(Contractor)

Well No. 6 in the NW 1/4 SW 1/4 of Sec. 30

T. 24 S, R. 38 E, NMPM, Dallarhide-Queen Pool, Lea County.

The Dates of this work were as follows: 2-7-55

Notice of intention to do the work (was) (was not) submitted on Form C-102 on \_\_\_\_\_, 19\_\_\_\_.

(Cross out incorrect words)

and approval of the proposed plan (was) (was not) obtained.

## DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

TD 3750, set 7" OD casing @ 3750 and cemented with 150 sacks cement.  
 Set Halliburton two stage tool @ 1150 and cemented @ 1150 with 150 sacks cement.  
 Ran temperature survey which indicated top of cement back of 7" casing @ 490' from surface.  
 Released rotary tools, moved in Cable tools, cement set 72 hours. Drilled cement plug and  
 cleaned out to 3720. Ran electric logs.  
 FBTD 3720, perforated 7" OD casing with 4 jet shots per foot from 3648 to 3660, 3665 to  
 3682, 3687 to 3693, 3698 to 3705. Sandfraced with 6,000 gallons of oil and 6,000 pounds  
 of sand, maximum pressure 4,000, injection rate 6.8 barrels per minute.  
 Flowed 36 barrels of oil in 12 hours.

Witnessed by H. A. Lund

(Name)


Sinclair Oil &amp; Gas Company

(Company)

Foreman

(Title)

Approved: OIL CONSERVATION COMMISSION

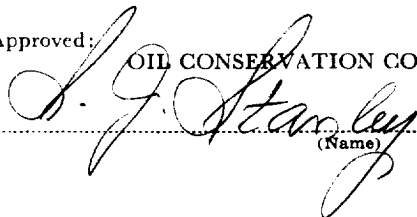

(Name)

(Title)

(Date)

I hereby certify that the information given above is true and complete to the best of my knowledge.

Name

Position Dist. Supt.

Representing Sinclair Oil &amp; Gas Company

Address 529 East Broadway, Hobbs, N.M.