


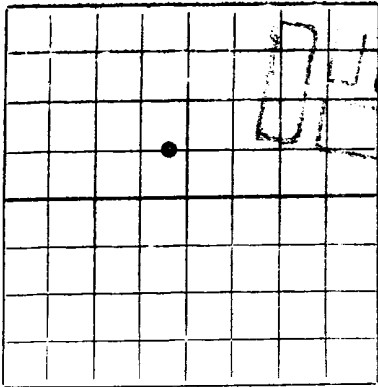

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE.

Gulf Oil Corporation

(Company or Operator)

Harry Leonard "A"

(Lease)

Well No. 26, in S1 1/4 of Nw 1/4, of Sec. 33, T. 24-S, R. 38-E, NMPM.

Dollarhide West Driland Pool, Lea County.

Well is 1980 feet from North line and 629 feet from East (State) line

of Section 33. If State Land the Oil and Gas Lease No. is E-1732

Drilling Commenced April 17, 1953. Drilling was Completed May 29, 1953.

Name of Drilling Contractor Food Drilling Co.

Address First National Bank Bldg. Wichita Falls, Texas

Elevation above sea level at Top of Tubing Head 3186'. The information given is to be kept confidential until

, 19.

OIL SANDS OR ZONES

No. 1, from 6545' to 6700' No. 4, from to

No. 2, from 6780' to 6900' No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
10-3/4"	32.75#	New	300'				
7"	23#	New	6500'				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
13"	10-3/4"	300'	300	HOLCO		
8-3/4"	7"	6500'	2100	MORCO		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

None

Result of Production Stimulation

Depth Cleaned Out

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from 0 feet to 6900 feet, and from feet to feet.
Cable tools were used from feet to feet, and from feet to feet.

PRODUCTION

Put to Producing June 1, 1953
OIL WELL: The production during the first 24 hours was 222 barrels of liquid of which 100 % was oil; % was emulsion; % water; and % was sediment. A.P.I. Gravity 37
GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of liquid Hydrocarbon. Shut in Pressure lbs.
Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico		Northwestern New Mexico	
T. Anhy. 1175	T. Devonian	T. Ojo Alamo	
T. Salt	T. Silurian	T. Kirtland-Fruitland	
B. Salt	T. Montoya	T. Farmington	
T. Yates. 2792	T. Simpson	T. Pictured Cliffs	
T. 7 Rivers	T. McKee	T. Menefee	
T. Queen. 3575	T. Ellenburger	T. Point Lookout	
T. Grayburg	T. Gr. Wash	T. Mancos	
T. San Andres	T. Granite	T. Dakota	
T. Glorieta. 5290	T.	T. Morrison	
T. Drinkard	T.	T. Penn.	
T. Tubbs. 6213	T.	T.	
T. Abo	T.	T.	
T. Penn.	T.	T.	
T. Miss.	T.	T.	

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	11.50		Distance from Top Kelly Drive Dishing to Ground				
	324		Red Bed & Shale				
	936		Red Bed				
	1100		Red Bed & Anhydrite				
	1266		Anhydrite & Gypsum				
	2637		Salt & Anhydrite				
	5286		Lime				
	5313		Sand & Lime				
	6900		Lime				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

June 3, 1953 (Date)
Company or Operator Gulf Oil Corporation Address Box 2167, Hobbs New Mexico
Name R. L. McPherson Position or Title Asst. Area Prod. Supt.

Harry Leonard "A" 26

DEVIATIONS - TOTCO SURVEYS

<u>DEPTH</u>	<u>DEG. OFF</u>	<u>DEPTH</u>	<u>DEG. OFF</u>
76'	1/2	3270'	1/2
205'	1	3443'	1/2
275'	1-1/2	3596'	3/4
480'	3/4	3727'	1
910'	3/4	3850'	3/4
1024'	1/2	3948'	3/4
1130'	1/2	4029'	3/4
1245'	1/4	4090'	1
1525'	1/2	5400'	1-1/4
1890'	1	5449'	1
2100'	1/4	5630'	1-1/2
2255'	1-3/4	5717'	1-1/4
2394'	2	5780'	1
2435'	2	6860'	1
2455'	2	6060'	3/4
2700'	1-3/4	6130'	1-1/4
2755'	1-1/2	6335'	1
2930'	1-1/2	6460'	1
3112'	0		