

Elwyn C. Hale -
Hale State # 3.

Set 1/2" OD 65# N40
5 Mins. CSG @ 507.43'
Cemented 260 SX - Circulated.

Set 1/2" OD 65# N40
Casing 17 43 13' 13 3/4" + 8"
SMs. CSG @ 507.43'
Cemented 260 SX - Circulated.

1/2" Nom. 2.75# N80 SMs
Integral JT. TGB
Set to perforations
IN McKee.

3 1/2" OD 9.20# SMs
Non Upset J55 CSG
Set @ 8478'

1/2" Nom. 2.75# N80 SMs
Integral JT. TGB
Set to perforations
IN Ellenberger.


3 1/2" OD 9.20# SMs.
Non Upset J55 CSG
Set @ 8477'.

2 7/8" 6.40# J55 N40E
SMs TxC CSG
Set @ 8477'

2 7/8" 6.40# J55 N40E.
SMs Buttrick CSG
Set @ 8479'

Cemented 4 strings of
CSG IN 9 5/8" hole
2000 SX FROM 8450'
Temp. Surfs. CANNOT back
to 800' from Surface

Perforate Dorian
6190-6205
Perforate McKee
(8020-8024) 8042-8076 (8086-8096)
Perforate Waddell
6151-8158 8166-8174
Perforate Ellenberger
T.D. 8480 (8460-8475)

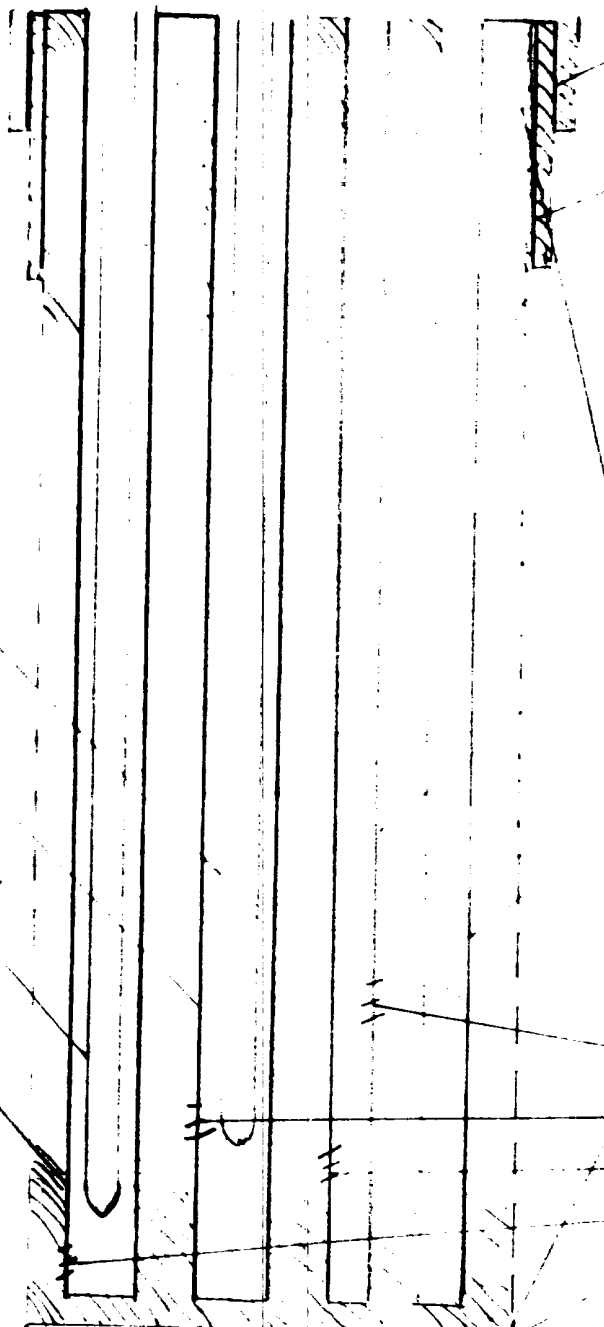

T
24
8

**T
25
S**