


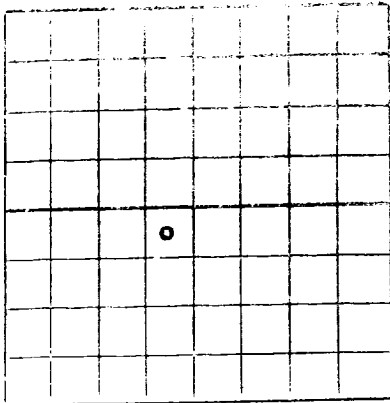

AREA 640 ACRES
LOCATE WELL CORRECTLY

HOBBBS OFFICE NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico
AUG 7 9 44 AM '64

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE. If State Land submit 6 Copies

OLSEN OILS, INC.

(Company or Operator)

OLSEN-STUART

(Lease)

Well No. 1, in NE 1/4 of SW 1/4, of Sec. 11, T. 25S, R. 37E, NMPM.

Pool, Lea County.

Well is 2310 feet from South line and 2310 feet from West line

of Section 11. If State Land the Oil and Gas Lease No. is

Drilling Commenced May 22, 1964 Drilling was Completed June 14, 1964

Name of Drilling Contractor Leatherwood Drilling Company

Address Kermit, Texas

Elevation above sea level at Top of Tubing Head 3118 feet The information given is to be kept confidential until
- , 19

OIL SANDS OR ZONES

No. 1, from 3385' to No. 4, from 5139' to
No. 2, from 3620' to No. 5, from 5838' to
No. 3, from 4748' to No. 6, from 5960' to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
8 5/8"	20#	New	1001'	Halliburton	-0-		
5 1/2"	15.5#	New	6200'	Halliburton	-0-	5873 to 6144	

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
12 1/4"	8 5/8"	1001'	400	Circulated		
7 7/8"	5 1/2"	6200'	535	Circulated		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

4000 gals. acid. 30,000 gals. refined oil and 30,000# sand. Fraced through perforations

@ 5873-84-95, 5909-12-22-41-55-58-89-95, 6001-13-21-32-44-59-68-81-92, 6117-24-44.

Tubb-Drinkard Section.

Result of Production Stimulation

Depth Cleaned Out

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from 0 feet to 6200 feet, and from feet to feet.
Cable tools were used from feet to feet, and from feet to feet.

PRODUCTION

Put to Producing 7-23-64.
OIL WELL: The production during the first 24 hours was 425 barrels of liquid of which 100% was oil; % was emulsion; % water; and % was sediment. A.P.I. Gravity.
GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of liquid Hydrocarbon. Shut in Pressure lbs.
Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico			Northwestern New Mexico		
T. Anhy			T. Devonian		T. Ojo Alamo
T. Salt			T. Silurian		T. Kirtland-Fruitland
B. Salt			T. Montoya		T. Farmington
T. Yates			T. Simpson		T. Pictured Cliffs
T. 7 Rivers			T. McKee		T. Menefee
T. Queen	3099'		T. Ellenburger		T. Point Lookout
T. Grayburg	3385'		T. Gr. Wash		T. Mancos
T. San Andres	3620'		T. Granite		T. Dakota
T. Elm	4748'		T.		T. Morrison
T. Elm	5139'		T.		T. Penn
T. Elm	5838'		T.		T.
T. Elm	5960'		T.		T.
T. Penn			T.		T.
T. Miss			T.		T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	41	41	Surface rock				
41	967	926	Red Beds - Anhydrite				
967	1001	34	Anhydrite				
1001	2334	1333	Salt & Anhydrite				
2334	2937	603	Anhydrite & Gyp.				
2937	3318	381	Lime & Sand				
3318	3697	379	Lime				
3697	4273	576	Sandy Lime & Dolomite				
4273	4767	494	Lime & Dolomite				
4767	5068	301	Sandy Lime & Dolomite				
5068	5126	58	Sandy Lime				
5126	5216	90	Lime & Dolomite				
5216	5306	90	Lime				
5306	6200	894	Lime & Dolomite				
6200			TOTAL DEPTH.				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Company or Operator Olsen Oils, Inc. Address 2811 Liberty Bank Building
Name J. J. [Signature] Oklahoma City, Oklahoma 73102
Position or Title Vice President