

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0135  
Expires July 31, 1996

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

Conoco, Inc.

3a. Address

10 Desta Dr. St.100W, Midland, TX 915-686-5424

3b. Phone No. (include area code)

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

U.L.-E 1980' FNL & 660' FWL  
Section 26, T-24S, R-32E

5. Lease Serial No.

NM 0321613

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.

Jack B-26 #2

9. API Well No.

30-025-21065

10. Field and Pool, or Exploratory Area

Justis Tubb-Drinkard

11. County or Parish, State

Lea County, NM

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

TYPE OF ACTION

☒ Notice of Intent

☐ Subsequent Report

☐ Final Abandonment Notice

☐ Acidize

☐ Alter Casing

☐ Casing Repair

☐ Change Plans

☐ Convert to Injection

☐ Deepen

☐ Fracture Treat

☐ New Construction

☒ Plug and Abandon

☐ Plug Back

☐ Production (Start/Resume)

☐ Reclamation

☐ Recomplete

☐ Temporarily Abandon

☐ Water Disposal

☐ Water Shut-Off

☐ Well Integrity

☐ Other

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 day following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

1. Circulate hole with gelled brine mud.
2. Spot 35 sxs cement plug 3275'-3800'.
3. Cut and pull 4 1/2" Csg. @ 2500'.
4. Spot 25 sxs cement stub plug 2450'-2550'.TAG-
5. Spot 35 sxs cement plug 1020'-1120'.
6. Perforate the 9 5/8" Csg. @ 360'.
7. Squeeze 70 sxs cement thru perfs at 360' leaving 100' cement inside of 9 5/8" casing. Tag cement top.
8. Spot 10 sxs cement surface plug.
9. Install dryhole marker and clear location.

SEE ATTACHED FOR  
CONDITIONS OF APPROVAL

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

Reesa Wilkes

Title

Sr. Staff Reg. Asst.

Signature

Reesa Wilkes

Date

12-6-99

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

(ORIG. SGD.) ALEXIS C. SWOBODA

PETROLEUM ENGINEER

Date

DEC 08 1999

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)


Distrib: BLM (5), OCD (1), SHEAR, PONCA, COST ASST, WELL FILE

GWG

# CURRENT WELLBORE

11/15/99

Elev. = 3212' GL +11' KB

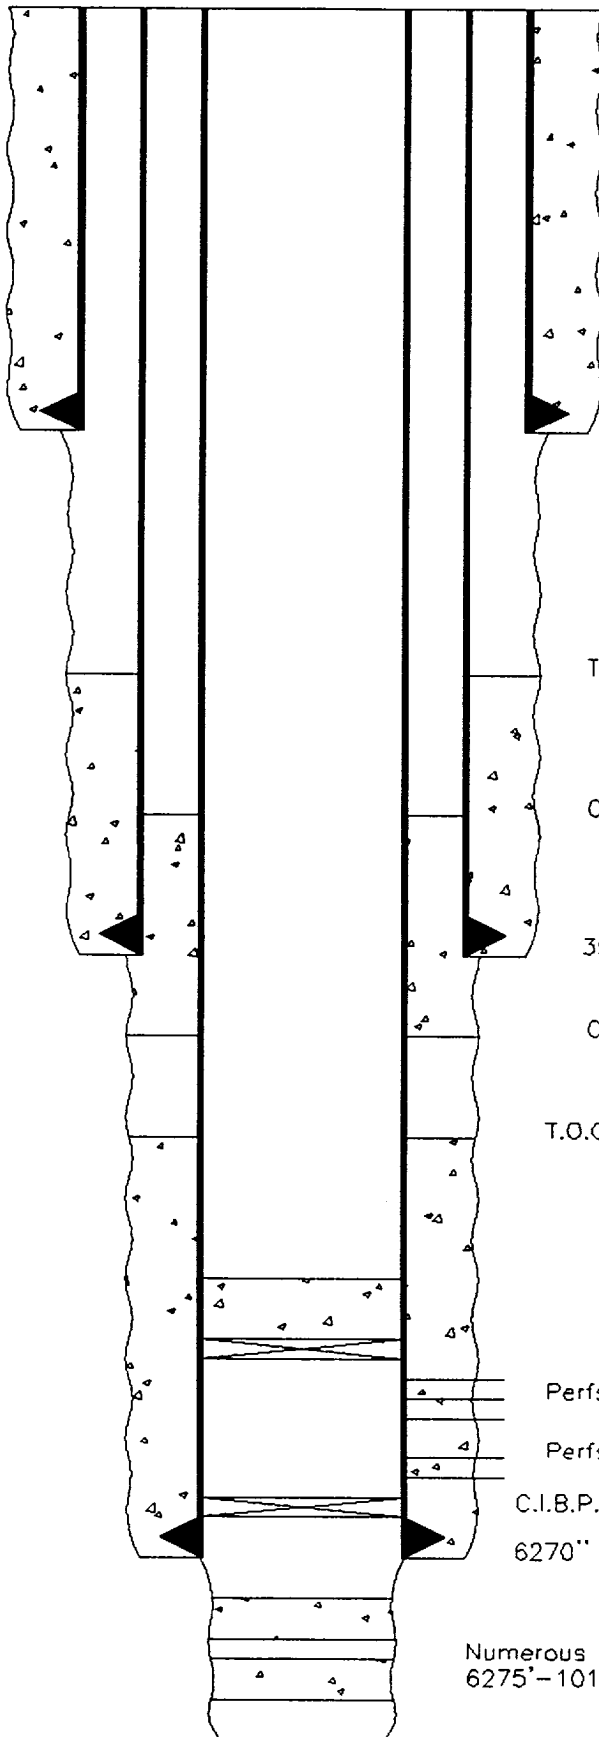

309' - 13 3/8" Casing. Cemented w/225 sxs. Circulated.

T.O.C. @ 1400' (Temp. Sur.)

Casing Leak Sqz'd 3445'-3783'

3543' - 9 5/8" Casing. Cemented w/775sxs.

Casing Leak Sqz'd 3500'-3550'

T.O.C. @ 4000' (Temp. Sur.)

Perfs 5195'-5795'

Perfs 5890'-6246'

C.I.B.P. @ 6250'

6270" - 4 1/2" Casing. Cemented w/400 sxs.

Numerous Cement Plugs  
6275'-10100'

T.D. @ 10246'

CONOCO, INC.

Jack B-26 No. 2

1980' FNL & 660' FWL

Sec. 26, T-24S, R-37E

Lea County, NM

# PROPOSED PLUG AND ABANDONMENT

11/15/99

Elev. = 3212' GL +11' KB

SPOT 10 SXS CEMENT SURFACE PLUG

MUD

SQUEEZE 70 SXS CEMENT THRU PERFS @ 360'

309' - 13 3/8" Casing. Cemented w/225 sxs. Circulated.

PERFORATE 9 5/8" CSG. @ 360'

MUD

SPOT 35 SXS CEMENT 1020'-1120'

MUD

T.O.C. @ 1400' (Temp. Sur.)

SPOT 25 SXS CEMENT STUB PLUG 2450'-2550'  
CUT AND PULL 4 1/2" CSG. @ 2500'

MUD

Casing Leak Sqz'd 3445'-3783'

SPOT 35 SXS CEMENT 3275'-3800'

3543' - 9 5/8" Casing. Cemented w/775sxs.

Casing Leak Sqz'd 3500'-3550'

MUD

T.O.C. @ 4000' (Temp. Sur.)

Perfs 5195'-5795'

Perfs 5890'-6246'

C.I.B.P. @ 6250'

6270" - 4 1/2" Casing. Cemented w/400 sxs.

Numerous Cement Plugs  
6275'-10100'

T.D. @ 10246'

CONOCO, INC.

Jack B-26 No. 2

1980' FNL & 660' FWL

Sec. 26, T-24S, R-37E

Lea County, NM

RECEIVED

DEC 07 33

BLM  
ROSWELL, NM