

UNIT STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUBMIT IN TRIPLIC
(Other instructions o.
verse side)

Form approved.
Budget Bureau No. 42-R1424.

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER		7. UNIT AGREEMENT NAME	
2. NAME OF OPERATOR CONTINENTAL OIL COMPANY		8. FARM OR LEASE NAME Jack B-17	
3. ADDRESS OF OPERATOR P. O. Box 460, Hobbs, N.M. 88240		9. WELL NO. 4	
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.* See also space 17 below.) At surface 990' FNL & 1,980' FWL of Sec. 17		10. FIELD AND POOL, OR WILDCAT Galveston Yates (Hess)	
14. PERMIT NO.		11. SEC., T., R., N., OR BLK. AND SURVEY OR AREA Sec. 17 T-24-S, R-37E	
15. ELEVATIONS (Show whether DF, RT, GR, etc.) 3288' DF (Std.)		12. COUNTY OR PARISH Lea	
		13. STATE N. Mex	

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
TEST WATER SHUT-OFF <input type="checkbox"/>	PULL OR ALTER CASING <input type="checkbox"/>	WATER SHUT-OFF <input checked="" type="checkbox"/>	REPAIRING WELL <input type="checkbox"/>
FRACTURE TREAT <input type="checkbox"/>	MULTIPLE COMPLETE <input type="checkbox"/>	FRACTURE TREATMENT <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
SHOOT OR ACIDIZE <input type="checkbox"/>	ABANDON* <input type="checkbox"/>	SHOOTING OR ACIDIZING <input type="checkbox"/>	ABANDONMENT* <input type="checkbox"/>
REPAIR WELL <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	(Other) <u>Commencement</u> <input checked="" type="checkbox"/>	

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Spudded 12 1/4" hole on 2-18-74 and drilled to 429'. Set 8 5/8" 20# casing at 429'; and cemented with 260 sacks Class "C" cement. Circulated cement to surface. Tested casing with 700#, held O.K.

18. I hereby certify that the foregoing is true and correct

SIGNED

Robert Daulton

TITLE

Division Office Manager

DATE


2-22-74

(This space for Federal or State office use)

APPROVED BY

CONDITIONS OF APPROVAL, IF ANY:

TITLE

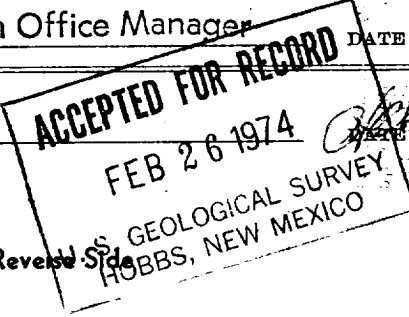

*See Instructions on Reverse Side

USGS-5, NM & U-4, File