

N. M. OIL CONS. COMMISSION
P. O. BOX 1980
HOBBS, NEW MEXICO 88240

Form Approved.
Budget Bureau No. 42-R1424

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS


(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ gas ☒ other ☐
well well
2. NAME OF OPERATOR
The Superior Oil Company
3. ADDRESS OF OPERATOR
P.O. Box 3901, Midland, Texas 79702
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 1980' FEL, 1980' FEL, Sec 35
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH: Same
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

- REQUEST FOR APPROVAL TO: SUBSEQUENT REPORT OF:
- | | | |
|----------------------|--------------------------|--------------------------|
| TEST WATER SHUT-OFF | ☐ | ☐ |
| FRACTURE TREAT | ☐ | ☐ |
| SHOOT OR ACIDIZE | ☐ | ☐ |
| REPAIR WELL | ☐ | ☐ |
| PULL OR ALTER CASING | ☐ | ☐ |
| MULTIPLE COMPLETE | ☐ | ☐ |
| CHANGE ZONES | ☐ | ☐ |
| ABANDON* | ☐ | ☐ |
- (other) Weekly drlg report & Csg Detail

5. LEASE
NM-15036
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
7. UNIT AGREEMENT NAME
8. FARM OR LEASE NAME
Olson Federal
9. WELL NO.
1
10. FIELD OR WILDCAT NAME
Wildcat
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Section 35, T25S, R34E
12. COUNTY OR PARISH
Lea
13. STATE
New Mexico
14. API NO.
15. ELEVATIONS (SHOW DF, KDB, AND WD)
3302' GR.

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

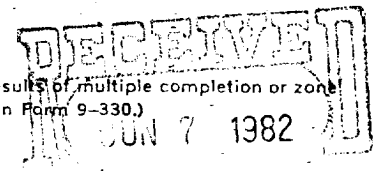

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

4/9/82 Drlg @ 7863'.
4/10/82 Reamed 67' of directional hole (7796'-7863'), WL svy @ 7854' = 1 3/4". POH
4/11/82 Wash to bottom, circ & run svy @ 8018' = 2 1/4", drlg @ 8080'.
4/12/82 Svy @ 8221' = 1 1/4", @ 8292' = 1 3/4", drld to 8430'.
4/13/82 Svy @ 8559' = 1 3/4", drld to 8760'.
4/14/82 Svy @ 8785' = 1 3/4", @ 9032' = 1 3/4", drlg 9124'.
4/15/82 Svy @ 9184' = 1 1/2", @ 9523' = 1", drld to 9590'.
4/16/82 Svy @ 9866' = 1", POH @ 9893'.
4/17/82 SLM in hole, wash & ream 50' to bottom, drlg correction-61.22 (short), drld to 10,025'.
4/18/82 Drlg @ 10,320'.
4/19/82 Totco @ 10,500 = 1/2". SLM out of hole.
4/20/82 Strap out of hole-no correction, wash & ream 60' to bottom, drld to 10,585'.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED [Signature] TITLE Production Superintendent DATE 6/1/82

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL _____

ACCEPTED FOR RECORD
(ORIG. SGD.) DAVID R. GLASS

OCT 21 1982
U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

*See Instructions on Reverse Side

4/21/82
4/22/82
4/23/82
4/24/82
4/25/82
4/26/82
4/27/82
4/28/82
4/29/82
4/30/82
5/1/82
5/2/82
5/3/82
5/4/82
5/5/82
5/6/82
5/7/82
5/8/82
5/9/82
5/10/82
5/11/82
5/12/82
5/13/82
5/14/82
5/15/82

Drig to 10,920'.
Drld to 11,260'.
Svy @ 11,520', drlg @ 11,520'. Svy @ 11,422'.
Drig @ 12,798'.
Drig @ 12,798'.
Ld equip.
Wash 52' to bottom, drlg @ 12,265'.
Lost DC's in hole, caught same, POH.
CNO new drlg line
Wash 60' to bottom, svy @ 12,263' = 10'.
Drig @ 12,632'.
Circ @ 12,815', 12,840', 12,860'.
Circ @ 12,880', 12,885', cond hole to log, svy @ 12,885'=3/40',
measure out of hole.
Logged, strap in hole.
Circ & cond hole for csg.
Ran 9-5/8" 47# csg to 12,895' w/DV tool @ 10,385.95', circ w/9 5/8" csg on bottom.
Cmtd 1-st stage 660 sx Class H w/additives, 200 sx Class H w/additives. Bumped
plug w/1500 # PSI ---- - held O.K. open DV w/1000# circ trace of cmt.
stage w/735 sx Lite Class H w/additives, 100 sx Class H w/additives, closed DV
w/2500# - held O.K.
Test equip, run Temp Svy, TOC @ 7758', test equip, WOC 24 hrs.
Drig out DV tool @ 10,398'.
Drig cmt, FC, etc, test csg, DV, etc - O.K.
Drig @ 13,440'.
Drld to 13,725'.
Drld to 13,830'.
Svy @ 13,886' = 3/40', drld to 13,957'.
Drld to 14,047'.

RECEIVED
NOV 1982
OFFICE
HOLDS TO