BOP REQUIREMENTS

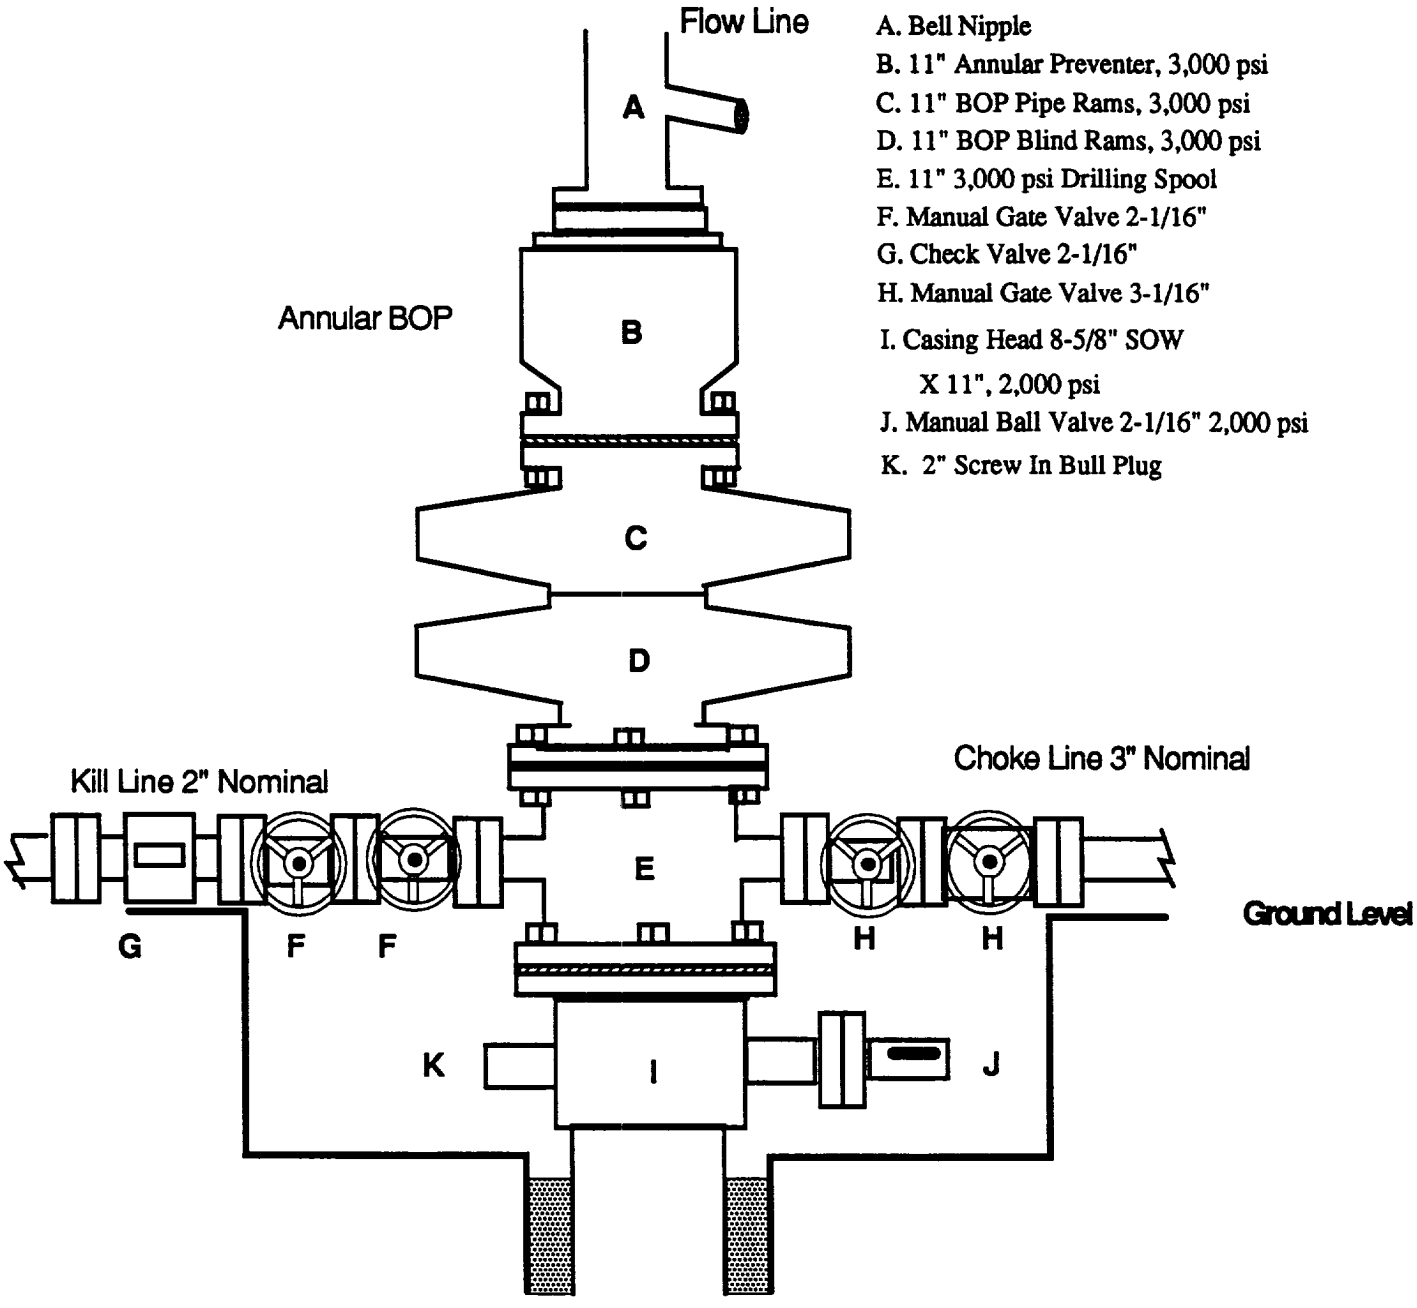

A. Bell Nipple
B. 11" Annular Preventer, 3,000 psi
C. 11" BOP Pipe Rams, 3,000 psi
D. 11" BOP Blind Rams, 3,000 psi
E. 11" 3,000 psi Drilling Spool
F. Manual Gate Valve 2-1/16"
G. Check Valve 2-1/16"
H. Manual Gate Valve 3-1/16"
I. Casing Head 8-5/8" SOW X 11", 2,000 psi
J. Manual Ball Valve 2-1/16" 2,000 psi
K. 2" Screw In Bull Plug