Form 3160-5 (August 1999)

UNITED STATES DEPARTMENT OF THE INTERIOR

I form the for the Common all the

Burkeling By Bury

FORM APPROVED OMB No. 1004-0135 Expires November 30, 2000

BUREAU OF LAND MANAGEMENT

5. Lease Serial No.

SUNDRY	NOTICES AND	REF	OKIS	UN	MELL2

NM-7487

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

7. If Unit or CA/Agreement, Name and/or No.


6. If Indian, Allottee or Tribe Name

SUBMIT IN TRI	PLICATE - Other instructions on re	verse side 	
. Type of Well Oil Well Gas Well	8. Well Name and No. SOUTH JUSTIS UNIT "C" #202		
. Name of Operator HENRY PETROLEUM LP	9. API Well No.		
a. Address 3525 ANDREWS HIGHWA	30-025-31967 10. Field and Pool, or Exploratory Area		
CIVIII (France Co.	e., T., R., M., or Survey Description) FNL & 2350' FEL SECTION 23, T-25		JUSTIS-BLY-TUBB-DRKD 11. County or Parish, State LEA COUNTY NEW MEXICO
12. CHECK AI	PPROPRIATE BOX(ES) TO INDICATE	NATURE OF NOTION	CE, REPORT, OR OTHER DATA
TYPE OF SUBMISSION		TYPE OF ACTION	N
Notice of Intent Subsequent Report	☐ Acidize ☐ Deepen ☐ Alter Casing ☐ Fracture Tr X Casing Repair ☐ New Constr ☐ Change Plans ☐ Plug and Alter	eat Reclamaticuction Recomplement Temporar	te Other
Final Abandonment Notice	☐ Convert to Injection ☐ Plug Back	☐ Water Dis	sposal
4900' & spot 1 sack san TIH w/packer - Found h w/bit & cleaned out to 1500# - Drill out cemen 4450' - Pump 125 sx cla cement & fell out at 450	nd - TIH w/cement retainer & set at a hole at 4472' - Pumped 300 sx class 4502' - POOH - TIH & set cement re t & retainer to 4632' - pressure to 6 ass -C- & squeeze to 1500# - Drilled 08' - washed sand off RBP at 4598' packer at 5046' - Notified NMOCD of 4-1/2" casing to 320# for 30" on H-	-C- & squeeze to tainer at 4400' & poor at 4400' & poor at 4400' & poor at a 150 minute at 150 minut	from 4617'-4676' - ran packer down to rton & pump 150 sx class -C POOH - 1000# - Released pkr & POOH - TIH ump 200 sx class -C- & squeeze to ute - TIH w/cement retainer & set at at 4450' & cement to 4476' - drilled 32' - Trip in hole w/Guiberson G-6 packer & Test - Circulated hole with packer eld OKC Rig down and move out & put
14. I hereby certify that the forego Name (Printed/Typed)	ing is true and correct	Title	GARY GOURLEY PETROLEUM ENGINEER
ROY R. JOHNSON		REGULATORY T	FECH.
Signature Say X	Johnson	Date 07/12/2001	
	THIS SPACE FOR FEDER	AL OR STATE OFFI	
Approved by		Title	Date
Conditions of approval, if any, are certify that the applicant holds lega	attached. Approval of this notice does not warrant or	Office	

BUREAU J. LO MEMT. BORRED J. BRAZOR

28:8 MA 8: 25

BECEINED

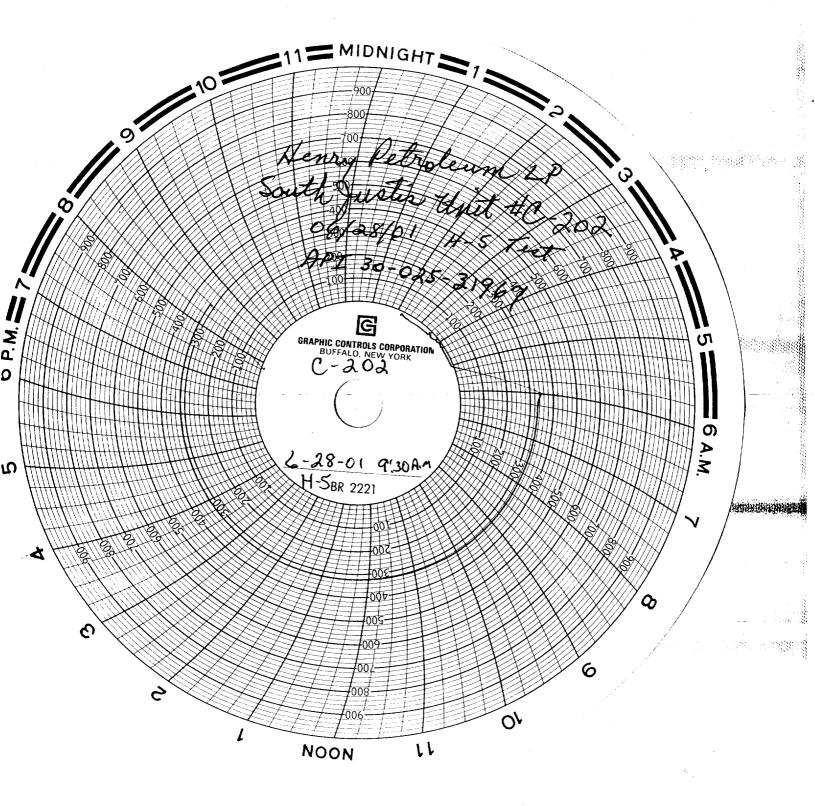

respecification description between applications and respectively and appropriate production of the second supplication of the se

The Man of the Man of

PUPPELL OF LOCATOR

25:8 KM 81 JUL 1892

BEOEINED