

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR DEEPEN

1a. TYPE OF WORK

DRILL ☒DEEPEN ☐

b. TYPE OF WELL

OIL
WELL ☒GAS
WELL ☐

OTHER

SINGLE
ZONE ☒MULTIPLE
ZONE ☐

2. NAME OF OPERATOR

Enron Oil & Gas Company

3. ADDRESS AND TELEPHONE NO.

P. O. Box 2267, Midland, Texas 79702

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.)*

At surface

660' FSL & 2110' FEL

At proposed prod. zone

660' FSL & 2110' FEL

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE*

29 miles west from Jal, NM

15. DISTANCE FROM PROPOSED*

LOCATION TO NEAREST
PROPERTY OR LEASE LINE, FT. 660

530

(Also to nearest drlg. unit line, if any)

18. DISTANCE FROM PROPOSED LOCATION*

TO NEAREST WELL, DRILLING, COMPLETED,

OR APPLIED FOR, ON THIS LEASE, FT. 2205' to #1

16. NO. OF ACRES IN LEASE

640

19. PROPOSED DEPTH

12600

17. NO. OF ACRES ASSIGNED
TO THIS WELL

80

20. ROTARY OR CABLE TOOLS

Rotary

21. ELEVATIONS (Show whether DF, RT, GR, etc.)

3350' GR

22. APPROX. DATE WORK WILL START*

Aug 20, 1994

23.

PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	GRADE, SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
14-3/4	11-3/4 H-40 ST&C	42#	650	250 sx CIRCULATED
11	8-5/8 J-55 ST&C	32#	5200	1100 sx CIRCULATED
7-7/8	5-1/2 P-110 LT&C	17#	12600	1400 sx TOC est at 4500'

OPER. OGRID NO. 7377

PROPERTY NO. 15331

POOL CODE 51020

EFF. DATE 8-8-94

APNO 32-025-32631

The undersigned accepts all applicable terms, conditions, stipulations, and restrictions concerning operations conducted on leased land or portions thereof as shown below:

19625
NM 18640-A

Sec 7, T25S, R34E

Bone Spring Formation

Federal Bond # is MT 0748 with endorsement to New Mexico

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24.

SIGNED

Betty Gildon

Betty Gildon

TITLE Regulatory Analyst

DATE 6/17/94

(This space for Federal or State office use)

PERMIT NO.

APPROVAL DATE

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

CONDITIONS OF APPROVAL, IF ANY:

APPROVED BY

151 Scott Powers

TITLE

Acting
AREA MANAGER

DATE

8/3/94

*See Instructions On Reverse Side

District I
PO Box 1980, Hobbs, NM 88241-1980
District II
PO Drawer DD, Artesia, NM 88211-0719
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
PO Box 2088, Santa Fe, NM 87504-2088

State of New Mexico
Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION
PO Box 2088
Santa Fe, NM 87504-2088

Form C-102
Revised February 10, 1994
Instructions on back
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number		Pool Code 51010	Pool Name Red Hills Bone Spring
Property Code	Property Name Half "/" Federal		Well Number 2
OGRID No. 7351	Operator Name Enron Oil & Gas Company		Elevation 3350'

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Ida	Feet from the	North/South line	Feet from the	East/West line	County
0	7	25-S	34-E		660	South	2110	East	Lea

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Ida	Feet from the	North/South line	Feet from the	East/West line	County
¹² Dedicated Acres 80		¹³ Joint or Infill		¹⁴ Consolidation Code		¹⁵ Order No.			

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

¹⁶ 	¹⁷ OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief Signature Betty Gildon Printed Name Regulatory Analyst Title 6/17/94 Date	
	¹⁸ SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. June 7, 1994 Date of Survey Signature and Seal of Professional Surveyor 	
	Certificate Number 8278	

DRILLING PROGRAM

Enron Oil & Gas Company
Half 7 Federal, Well No. 2
660' FSL & 2110' FEL
Sec. 7, T25S, R34E
Lea County, New Mexico

1. Geologic Name of Surface Formation:

Permian

2. Estimated Tops of Important Geologic Markers:

Rustler	850'
Delaware Mt. Group	5175'
Bone Spring Lime	9275'
Bone Spring Pay	12300'
TD	12600'

3. Estimated Depths of Anticipated Fresh Water, Oil or Gas:

Upper Permian Sands	100'	Fresh Water
3rd Bone Spring Sand	12300'	Oil

No other formations are expected to give up oil, gas or fresh water in measurable quantities. The surface fresh water sands will be protected by setting 11-3/4" casing at 650' and circulating cement back to surface, and 8-5/8" casing will be set at 5200' with cement circulated back to surface.

Enron Oil & Gas Company
 Half 7 Federal, Well No. 2
 660' FSL & 2110' FEL
 Sec. 7, T25S, R34E
 Lea County, New Mexico

4. Casing Program:

<u>Hole Size</u>	<u>Interval</u>	<u>OD csq</u>	<u>Weight Grade Jt. Cond. Type</u>
14-3/4	0- 650'	11-3/4	42# H-40 A ST&C
11	0- 5200'	8-5/8	32# J-55 ST&C
7-7/8	0-12650'	5-1/2	17# P-110 LT&C

Cementing Program:

- 11-3/4" Surface casing: Cement to surface with 250 sx of Class C + 2% CaCl₂ + 1/4#/sx flocele.
- 8-5/8" Intermediate: Cement to surface with 800 sx of Premium Plus lite + 15#/sx salt + 1/4#/sx Flocele and 300 sx Cl C + 2% CaCl₂
- 5-1/2" Prod casing: Cement with 1400 sx 50/50 Cl H/Poz + 2% gel + .4% CF-14, .1% Diacel LWL. This cement slurry is designed to bring TOC to 4500'.

5. Minimum Specifications for Pressure Control:

The blowout preventer equipment (BOP) shown in Exhibit #1 will consist of a double ram-type (5000 psi WP) preventer and an annular preventer (5000 psi WP). Units will be hydraulically operated and the ram-type will be equipped with blind rams on top and drill pipe rams on bottom. All will be installed on the 11-3/4" surface casing and used continuously until TD is reached. All BOP's and accessory equipment will be tested to 600 psi before drilling out of surface casing. Before drilling out of intermediate casing, the ram-type BOP and accessory equipment will be tested to 2500 psi and the annular to 70% of rated working pressure (1750 psi).

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. A 2" kill line and 4" choke line will be included in the drilling spool located below the ram-type BOP. Other accessories to the BOP equipment will include a kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold with 5000 psi WP rating.

ENRON OIL & GAS COMPANY

Half 7 Federal No. 2

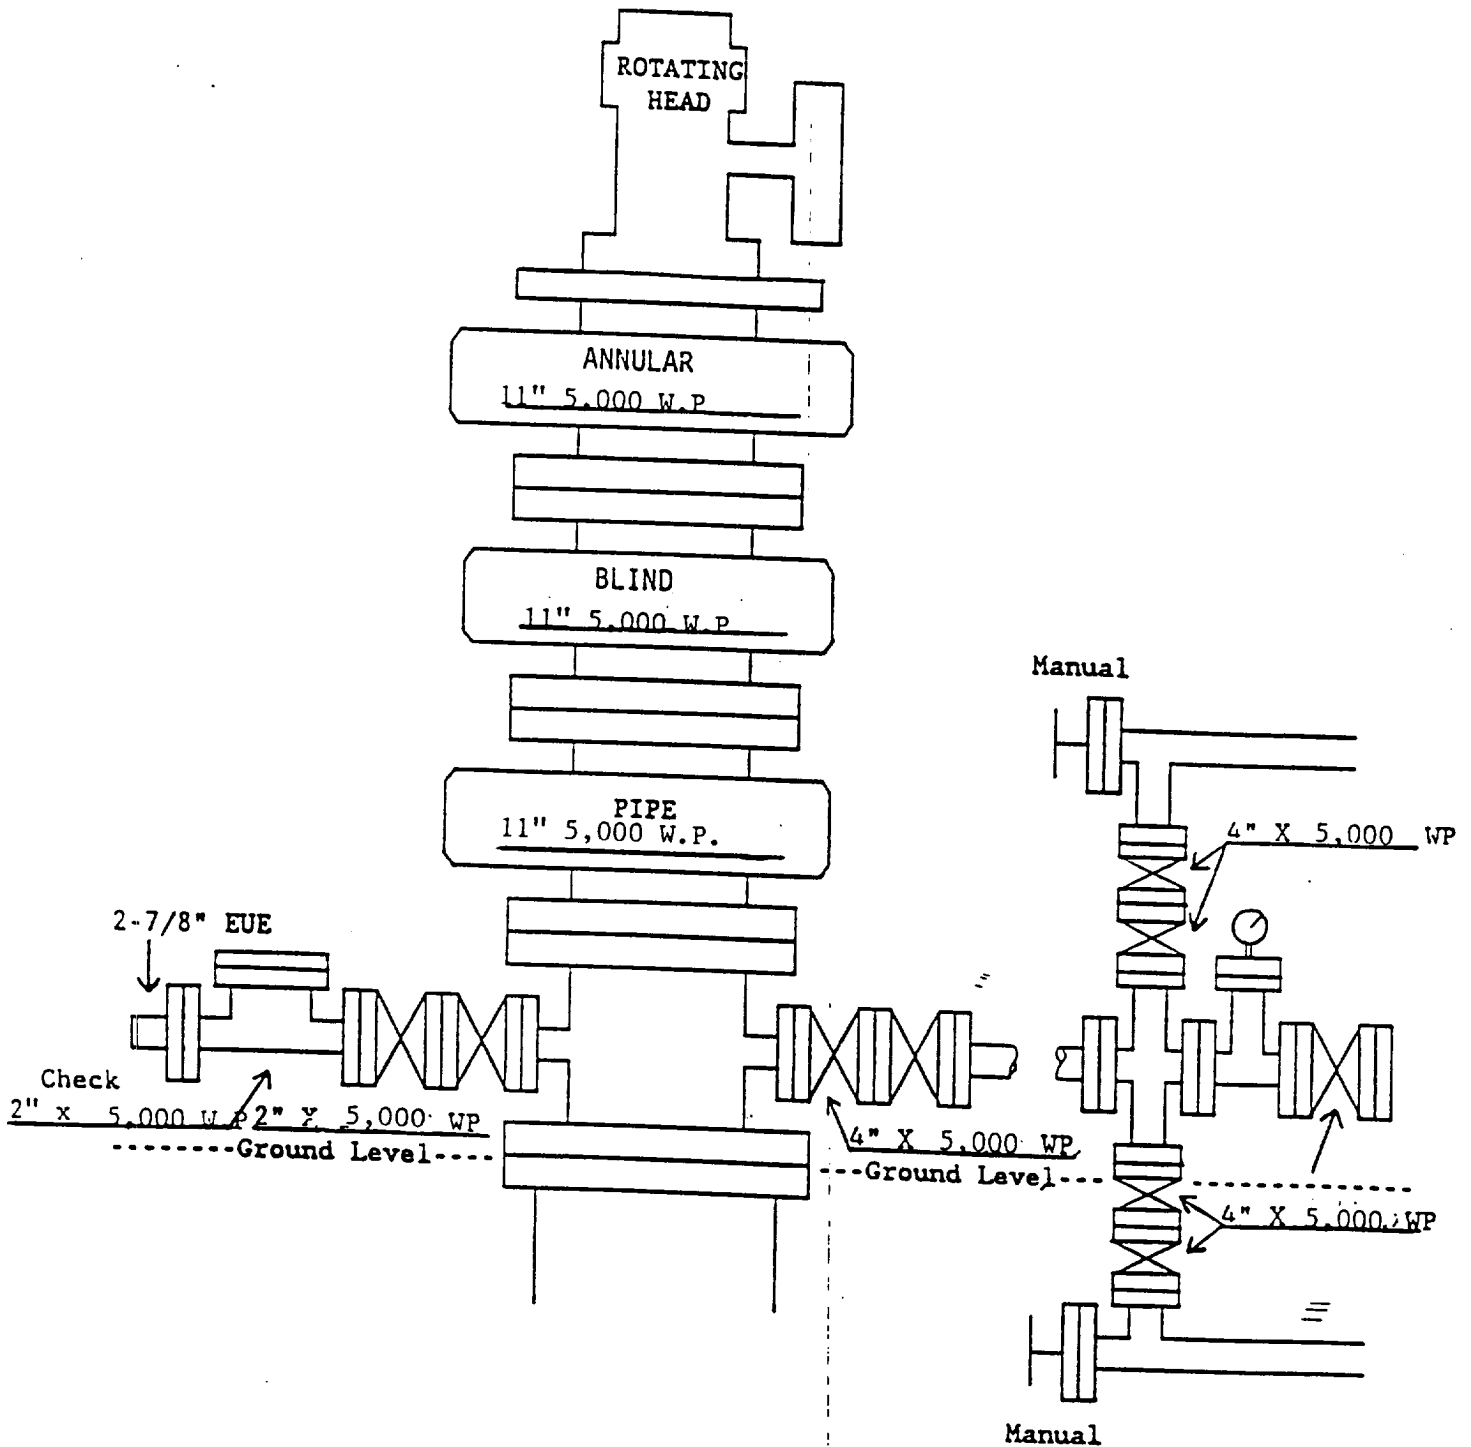


EXHIBIT #1