


**DRILLING CONTROL  
CONDITION II-B 3000 WP  
FOR AIR DRILLING OR  
WHERE NITROGEN OR AIR BLOWS ARE EXPECTED**

H<sub>2</sub>S TRIM REQUIRED  
YES X NO     

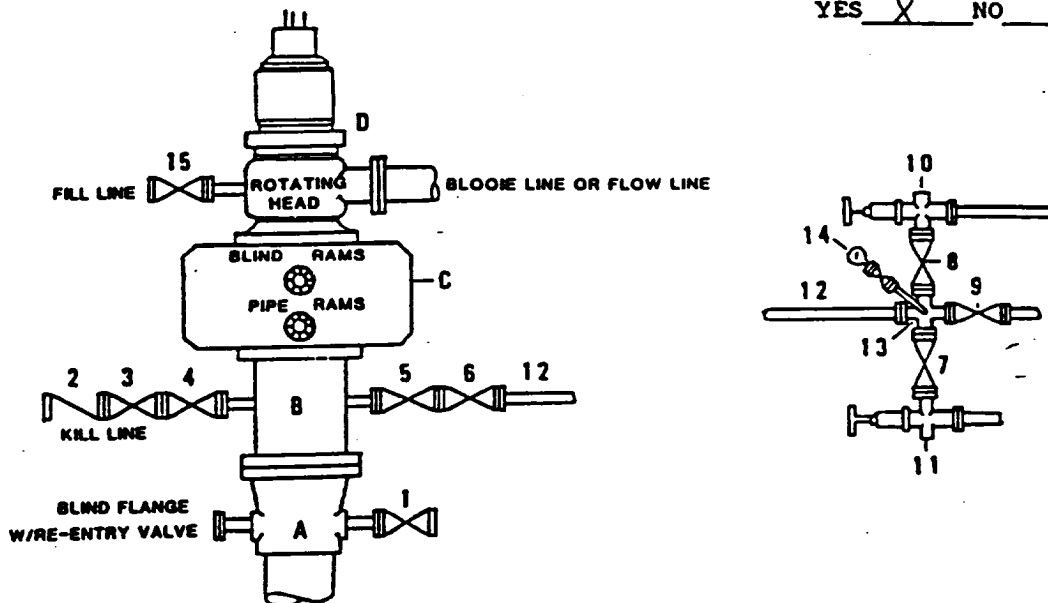

**DRILLING CONTROL  
MATERIAL LIST - CONDITION II - B**

- A        Texaco Wellhead
- B        3000# W.P. drilling spool with a 2" minimum flanged outlet for kill line and 3" minimum flanged outlet for choke line.
- C        3000# W.P. Dual ram type preventer, hydraulic operated with 1" steel, 3000# W.P. control lines (where sub-structure height is adequate, 2 - 3000# W.P. single ram type preventers may be utilized).
- D        Rotating Head with fill up outlet and extended Bloop Line.
- 1,3,4, 7,8,    2" minimum 3000# W.P. flanged full opening steel gate valve, or Halliburton Lo Torc Plug valve.
- 2        2" minimum 3000# W.P. back pressure valve.
- 5,6,9    3" minimum 3000# W.P. flanged full opening steel gate valve, or Halliburton Lo Torc Plug valve.
- 12       3" minimum schedule 80, Grade "B", seamless line pipe.
- 13       2" minimum x 3" minimum 3000# W.P. flanged cross.
- 10,11    2" minimum 3000# W.P. adjustable choke bodies.
- 14       Cameron Mud Gauge or equivalent ( location optional in choke line).
- 15       2" minimum 3000# W.P. flanged or threaded full opening steel gate valve, or Halliburton Lo Torc Plug valve.



TEXACO, INC.  
MIDLAND DIVISION  
MIDLAND, TEXAS



| SCALE       | DATE | EST NO | DRG NO |
|-------------|------|--------|--------|
| DRAWN BY    |      |        |        |
| CHECKED BY  |      |        |        |
| APPROVED BY |      |        |        |

EXHIBIT C

12/15/95

111

