

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

N. M. B. L. M.
P. O. Box 1004-0136
HOBBS, NEW MEXICO 88240

FORM APPROVED

Budget Bureau No. 1004-0136

Expires: December 31, 1991

SUBMIT IN TRIPLICATE

166

APPLICATION FOR PERMIT TO DRILL OR DEEPEN

1a. Type of Work DRILL <input checked="" type="checkbox"/> DEEPEN <input type="checkbox"/>	1b. Type of Well OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <input type="checkbox"/>	SINGLE ZONE <input checked="" type="checkbox"/> MULTIPLE ZONE <input type="checkbox"/>	5. Lease Designation and Serial No. NM 14218
2. Name of Operator TEXACO EXPLORATION & PRODUCTION INC.			6. If Indian, Alottee or Tribe Name
3. Address and Telephone No. P.O. Box 3103, Midland Texas 79702 688-4606			7. If Unit or CA, Agreement Designation
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At Surface: Unit Letter: 1650' Feet From The SOUTH Line and 940' Feet From The EAST Line At proposed prod. zone: SAME			8. Well Name and Number C. C. FRISTOE 'B' FEDERAL NCT-2
14. Distance In Miles and Direction from Nearest Town or Post Office* 6.2 MILES NE OF JAL, NM			23
15. Distance From Proposed* Location to Nearest Property or Lease Line, Ft. (also to nearest drlg. unit line, if any) 380'			9. API Well No. 30-025-34261
16. No. of Acres in Lease 400			10. Field and Pool, Explortory Area JUSTIS BLINEBRY/JUSTIS TUBB DRINKARD
17. No. of Acres Assigned To This Well 40			11. SEC., T., R., M., or BLK. and Survey or Area Sec. 26, Township 24-S, Range 37-E
18. Distance From Proposed Location* to Nearest Well, Drilling, Completed or Applied For, On This Lease, Ft. 437'			12. County or Parish LEA
19. Proposed Depth 6400'			13. State NM
20. Rotary or Cable Tools ROTARY			21. Elevations (Show whether DF, RT, GR, etc.) GR-3166'
22. Approx. Date Work Will Start* 1/3/98			

23. PROPOSED CASING AND CEMENT PROGRAM				
SIZE OF HOLE	GRADE, SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
* 11	WC50. 8 5/8	24#	925'	525 SACKS - WITNES
7 7/8	L80/K55, 4 1	11.6#	6400'	1400 SACKS - YOC

CAPITAN CONTROLLED WATER BASIN

CEMENTING PROGRAM:

SURFACE CASING: 325 SACKS CLASS C w/4% GEL, 2% CC (13.5 PPG, 1.74 CF/S, 9.1 GW/S). F/B 200 SACKS CLASS C w/2% CC (14.8 PPG, 1.34 CF/S, 6.3 GW/S).

PRODUCTION CASING: 700 SACKS 35/65 POZ H w/6% GEL, 5% SALT, 1/4# FC (12.4 PPG, 2.14 CF/S, 11.9 GW/S). F/B 700 SACKS 50/50 POZ H w/2% GEL, 5% SALT, 1/4# FC (14.2 PPG, 1.35 CF/S, 6.3 GW/S).

*VERBAL APPROVAL FROM OCD IN HOBBS TO SET 8 5/8" SURFACE CASING IN AN 11" HOLE FOR WELLS ON THIS LEASE.

12 DAYS TO DRILL, 10 DAYS TO COMPLETE
THERE ARE NO OTHER OPERATORS IN THIS QUARTER QUARTER SECTION.

APPROVAL SUBJECT TO
GENERAL REQUIREMENTS AND
SPECIAL STIPULATIONS
ATTACHED

In Above Space Describe Proposed Program: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured true verticle depths. Give blowout preventer program, if any.

24. I hereby certify that the foregoing is true and correct
SIGNATURE A. Phil Ryan TITLE Commission Coordinator DATE 12/4/97
TYPE OR PRINT NAME

(This space for Federal or State office use)

PERMIT NO. APPROVAL DATE

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

APPROVED BY ORIG 500-700-1-ERGUSO TITLE ADM. MINERALS DATE 1-5-98

CONDITIONS OF APPROVAL, IF ANY:

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

RECEIVED
DEC 08 37
ROSWELL, NM

DISTRICT I
P. O. Box 1981, Hobbs, NM 88240

DISTRICT II
P. O. Drawer 121, Artesia, NM 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

DISTRICT IV
P. O. Box 2081, Santa Fe, NM 87504-2088

State of New Mexico
Energy, Minerals and Natural Resources Department

OIL CONSERVATION DIVISION

PO Box 2088
Santa Fe, NM 87504-2088

Form C-102
Revised February 10, 1994

Instructions on back

Submit to Appropriate District Office

State Lease-4 copies
Fee Lease-3 copies

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-225-34261		² Pool Code 35280		³ Pool Name Justia Blinebry & Justia Tubb Drinkard	
⁴ Property Code 10944		⁵ Property Name C. C. Fristoe "B" Federal NCT-2			⁶ Well Number 23
⁷ GRID No. 22351		⁸ Operator Name TEXACO EXPLORATION & PRODUCTION, INC.			⁹ Elevation 3166'

¹⁰ Surface Location									
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
I	26	24-S	37-E		1650'	South	940'	East	Lea

¹¹ Bottom Hole Location if Different From Surface									
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
¹² Dedicated Acres 40		¹³ Joint or Infill		¹⁴ Consolidation Code		¹⁵ Order No.			

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION.

	¹⁶ OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief. Signature: <i>Phil Ryan</i> Printed Name: Phil Ryan Position: Engineer's Assistant Company: Texaco Expl. & Prod. Inc. Date: December 1, 1997
	¹⁷ SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my knowledge and belief. Date Surveyed: November 14, 1997 Signature & Seal of Professional Surveyor: <i>John S. Piper</i> Certificate No.: 7254 John S. Piper
	Sheet 8 of 8

DRILLING PROGRAM

C. C. FRISTOE 'B' FEDERAL NCT-2 WELL No. 23

SURFACE DESCRIPTION:

See Item 11 (other information) in the attached Surface Use and Operations Plan.

FORMATION TOPS: Estimated KB Elevation: 3194'

<u>Formation</u>	<u>Depth</u>	<u>Lithology</u>	<u>Fluid Content</u>
Rustler	925'	Anhy, Salt	----
Tansill	2270'	Anhy, Dolo	----
Yates	2385'	Sandstone, Anhy	----
Queen	3090'	Sandstone, Anhy	----
Blinebry	5115'	Dolomite, Anhy	Oil
Tubb	5800'	Sandstone	Oil
Drinkard	6010'	Dolomite, Anhy	Oil
Abo	6250'	Dolo, Limestone	Oil

The base of the salt section is the top of the Tansill at 2270'. No abnormal pressures or temperatures are anticipated to be encountered in this well. H2S is present in the Blinebry. H2S RADIUS OF EXPOSURE: 100ppm = 26', 500ppm = 12', based on 300ppm H2S and 380 MCF (see attached H2S Drilling Operations Plan. H2S equipment to be operational prior to drilling out Surface Casing Shoe.)

Duration of Operation: 12 Days to Drill & 10 Days to Complete

PRESSURE CONTROL EQUIPMENT:

A 3000 psi Dual Ram type preventer with rotating head will be used. (See Exhibit C). We do not plan to have an annular preventer. We will be able to achieve full closure of the well with the double ram preventer. It will be installed after surface casing is set. BOP will be tested each time it is installed on a casing string and at least every 29 days, and operated at least once each 24-hour period during drilling.

A PVT system will not be installed. We will be drilling thru the reserve pit and will circulate the steel pits one hour each tour to check for gains and losses and will be noted on the driller's log, which is Texaco's policy.

We do not plan to run an automatic remote-controlled choke. We will have installed and tested two manual, H2S trimmed, chokes.

CASING AND CEMENT PROGRAM:

The cementing program is detailed on Form 3160-3. All casing will be new.

Casing Program:

Surface Casing - 8 5/8", 24#, WC50, STC set at 925'.

Production Casing - 0' to 2000': 4 1/2", 11.6#, L-80, LTC
2000' to 6400': 4 1/2", 11.6#, K-55, LTC.

Centralizer Program:

Surface Casing - Centralize the bottom 3 joints and every 4th to surface.

Production Casing - Centralize every 3rd joint on bottom 2000'.

MUD PROGRAM:

<u>Depth</u>	<u>Type</u>	<u>Weight</u>	<u>Viscosity</u>
0'-925'	Fresh Water	8.4	28
925'-4000'	Brine	10.0	29
4000'-6400'	Brine/Starch	10.0	32-36

Bottom Hole Pressure at T.D. estimated to be 6.7 PPG EMW (2230 psi).

LOGGING, TESTING:

GR-CNL-LDT, GR-DLL-MSFL, and GR-Sonic surveys will be run.


No Mud Logging Unit will be used.

No drill stem tests will be conducted.

No cores will be taken.

**DRILLING CONTROL
CONDITION II-B 3000 WP
FOR AIR DRILLING OR
WHERE NITROGEN OR AIR BLOWS ARE EXPECTED**

H₂S TRIM REQUIRED
YES _____ NO X

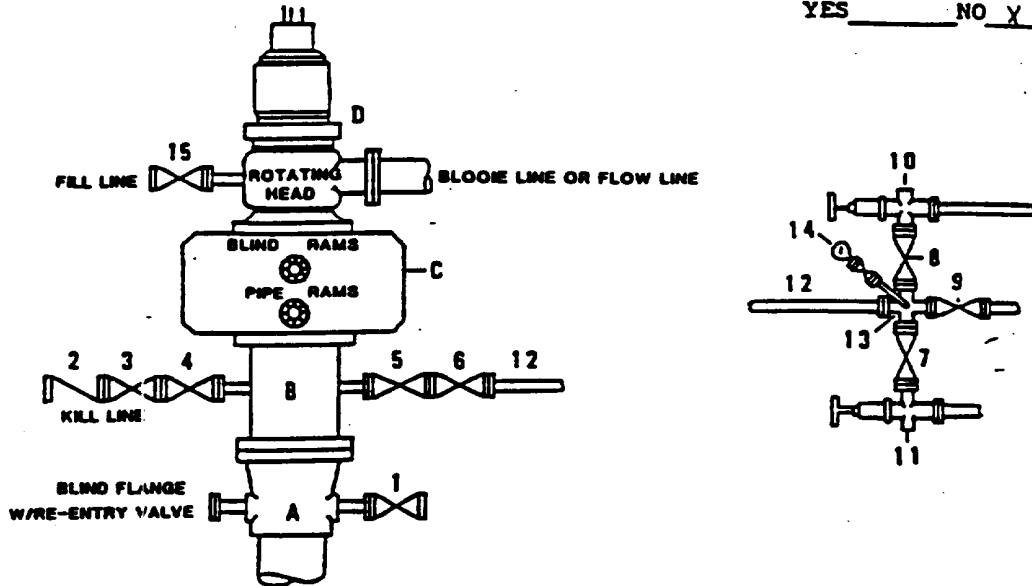

DRILLING CONTROL

MATERIAL LIST - CONDITION II - B

- A Texaco Wellhead
- B 3000# W.P. drilling spool with a 2" minimum flanged outlet for kill line and 3" minimum flanged outlet for choke line.
- C 3000# W.P. Dual ram type preventer, hydraulic operated with 1" steel, 3000# W.P. control lines (where sub-structure height is adequate, 2 - 3000# W.P. single ram type preventers may be utilized).
- D Rotating Head with fill up outlet and extended Bloopie Line.
- 1,3,4, 7,8, 2" minimum 3000# W.P. flanged full opening steel gate valve, or Halliburton Lo Torc Plug valve.
- 2 2" minimum 3000# W.P. back pressure valve.
- 5,6,9 3" minimum 3000# W.P. flanged full opening steel gate valve, or Halliburton Lo Torc Plug valve.
- 12 3" minimum schedule 80, Grade "B", seamless line pipe.
- 13 2" minimum x 3" minimum 3000# W.P. flanged cross.
- 10,11 2" minimum 3000# W.P. adjustable choke bodies.
- 14 Cameron Mud Gauge or equivalent (location optional in choke line).
- 15 2" minimum 3000# W.P. flanged or threaded full opening steel gate valve, or Halliburton Lo Torc Plug valve.



TEXACO, INC.
MIDLAND DIVISION
MIDLAND, TEXAS



SCALE	DATE	EST. NO.	DRG. NO.
DRAWN BY			
CHECKED BY			
APPROVED BY			

EXHIBIT C

OPERATOR - LANDOWNER AGREEMENT

COMPANY: TEXACO EXPLORATION AND PRODUCTION INC.

PROPOSED WELL: C. C. FRISTOE 'B' FEDERAL NCT-2 No. 23

FEDERAL LEASE No. NM 14218

This is to advise that Texaco Exploration and Production Inc. has an agreement with:

Bill and Elena Grobe, P.O. Box G, Jal, NM 88252

the surface owner, concerning entry and surface restoration after completion of drilling operations at the above described well.

After abandonment of the well, all pits will be filled and leveled, all equipment and trash will be removed from well site. No other requirements were made concerning restoration of the well site.

12/4/97

Date



**A. Phil Ryan
Commission Coordinator
Midland, Texas**

SURFACE USE AND OPERATIONS PLAN
FOR
TEXACO EXPLORATION AND PRODUCTION, INC.

C. C. FRISTOE "B" FEDERAL (NCT-2) No. 23

1650' FSL & 940' FEL, Section 26,

TWP. 24 South, Range 37 East, N.M.P.M.,

Lea County, New Mexico

LOCATED: 6.2 Miles Northeasterly of Jal, New Mexico

FEDERAL LEASE NUMBER: NM 14218

LEASE ISSUED: Lease is in a producing status

ACRES IN LEASE: 400

RECORD LESSEE: TEXACO EXPLORATION AND PRODUCTION, Inc.

SURFACE OWNERSHIP: Bill and Elena Grobe
P. O. Box G
Jal, New Mexico 88252
(505) 395-3189

POOL: Justis Blinebry; Justis Tubb Drinkard

POOL RULES: Field rules are for no wells to be located closer than 330' to any quarter-quarter section and to be 330' from the lease line.

EXHIBITS: A. Access Road and Facilities Map

B. Drilling Rig Layout Diagram

C. Well Location and Acreage Dedication Plat

1. EXISTING ACCESS ROADS

A. Exhibit "A" is an enlarged portion of a 7.5 minute U.S.G.S. topographic map showing the proposed well site and the existing roads in the area. Point "A" is at the intersection of an existing resource road and County Road C-14, 0.6 miles East of its intersection with County Road C-13, being 4.0 miles North along County Road C-13 from its intersection with State Highway 128 which is approximately 3 miles East of Jal, New Mexico along State Highway 128. From Point "A" as shown on Exhibit "A", go 0.25 miles North and 0.25 miles East to the beginning of the proposed resource road as shown on Exhibit "A"

2. PLANNED RESOURCE ROAD

A. Length and Width: A new 14 foot wide Resource Road will be constructed approximately 260 feet Northerly (Shown in Red on Exhibit "A") with access at the Southeast corner of the proposed well pad as shown on Exhibits "A" and "B".

B. Surfacing Material: Caliche material will be used to surface the proposed road. It will be watered, compacted, and graded.

C. Maximum Grade: An approximate grade of less than one percent will be encountered ascending to the proposed well pad.

D. Turnouts: Turnouts will not be required.

E. Drainage Design: The new road will be crowned at the center to direct drainage to ditches on both sides of the roadway.

F. Culverts: None will be required.

G. Cuts and Fills: A slight amount of leveling will be required to the proposed well pad.

H. Gates and Cattle Guards: None will be required.

3. LOCATION OF EXISTING WELLS

A. Existing wells on the lease and in the immediate area are shown on Exhibit "A".

4. LOCATION OF EXISTING AND PROPOSED FACILITIES

A. The oil, gas, and/or water that this well produces will be transported by a 2 7/8" steel surface flowline, approximately 2780 feet in length, (Shown in Green on Exhibit "A") to the C. C. Fristoe Consolidated Tank Battery located in the Northeast quarter of the Northeast quarter of said Section 35 as shown on Exhibit "A".

B. Approximately 560 feet of electric power line will be built to service this well as shown on Exhibits "A" and "B". Note that some existing electric lines in the area are also shown on Exhibit "A" for reference. It is a 12,470 phase to phase, 7200 volts to ground three phase. It is an operator owned powerline.

5. LOCATION AND TYPE OF WATER SUPPLY

A. It is not contemplated that a water well would be drilled. Water necessary for drilling operations will be purchased and trucked to the well site or will be transported to the well site by a temporary pipeline laid on the ground alongside existing and proposed roads.

6. SOURCE OF CONSTRUCTION MATERIALS

A. Caliche needed for the well pad will be taken from the proposed borrow pit located within the 400 x 400' archaeologically cleared tract at the proposed well site (See Exhibit "B" for location). If sufficient quality or quantity of caliche is not available, it will be transported to the proposed road and well site from the existing pit located in the SE/4 of the SE/4 of Section 35, T24S, R37E, Lea County, as shown on Exhibit "A" along the existing resource roads.

7. METHOD OF HANDLING WASTE DISPOSAL

A. Drill cuttings will be disposed of in the drilling pits.

B. Drilling fluids will be allowed to evaporate in the drilling pits until the pits are dry.

C. Water produced during tests will be disposed of at commercial or company facilities.

D. Oil produced during tests will be stored in test tanks until sold.

E. Trash, waste paper, garbage and junk will be stored in a trash bin located on the drill site pad. It will be transported to an approved landfill for disposal within 30 days after completion of drilling and/or completion of operations. All waste material will be contained to prevent scattering by the wind.

8. ANCILLARY FACILITIES

- A. None required.

9. WELL SITE LAYOUT

A. Exhibit "B" shows the relative location and dimensions of the well pad, mud pits, borrow pit, and the location of the major rig components.

B. Cut and Fill requirements will be minor, but clearing and leveling of the well site will be necessary.

10. PLANS FOR RECLAMATION OF THE SURFACE

A. After completion of drilling and/or completion of operations, all equipment and other material not necessary for operations will be removed. Pits will be filled and the location will be cleaned of all trash and junk to leave the well site in an as aesthetically pleasing condition as possible.

B. Any unguarded pits containing fluids will be fenced until the pits are dry.

C. After abandonment, all equipment, trash and junk will be removed and the well site will be cleaned. Any special reclamation and/or special revegetation requirements of the Surface Management Agency will be complied with and will be accomplished as rapidly as possible.

11. OTHER INFORMATION

A. Topography: The land surface in the area of the well is relatively level. Regionally, the land slopes to the Southeast with an average slope of approximately of one percent.

B. Soil: Topsoil at the well site is a shallow sandy loam.

C. Flora and Fauna: The vegetation cover is moderate. It includes range grasses, weeds, and mesquite bushes. Wildlife in the area is that typical of a semi-arid desert land and includes coyotes, rabbits, rodents, reptiles, hawks, dove, quail and other small birds.

D. Ponds and Streams: There are no rivers, lakes, ponds or streams in the area.

E. Residences and Other structures: There are no occupied dwellings or other structures within a half mile of the proposed well site.

F. Archaeological, Historical, or other Cultural Sites: None were observed in the area.

G. Land Use: Grazing, oil and gas production, and wildlife habitat.

H. Surface Ownership: Private fee.

12. OPERATOR'S REPRESENTATIVE

Phil Ryan
Engineer's Assistant
Texaco Exploration and Production, Inc.
P. O. Box 3109
Midland, Texas 79701
Office Phone: (915) 688-4606


CERTIFICATION

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions which currently exist; that the statements made in the plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by Texaco Exploration and Production, Inc. and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U. S. C. 1001 for the filing of a false statement.

12/4/97
Date

Phil Ryan
Phil Ryan
Engineer's Assistant
Midland, Texas

Enclosures
dmb

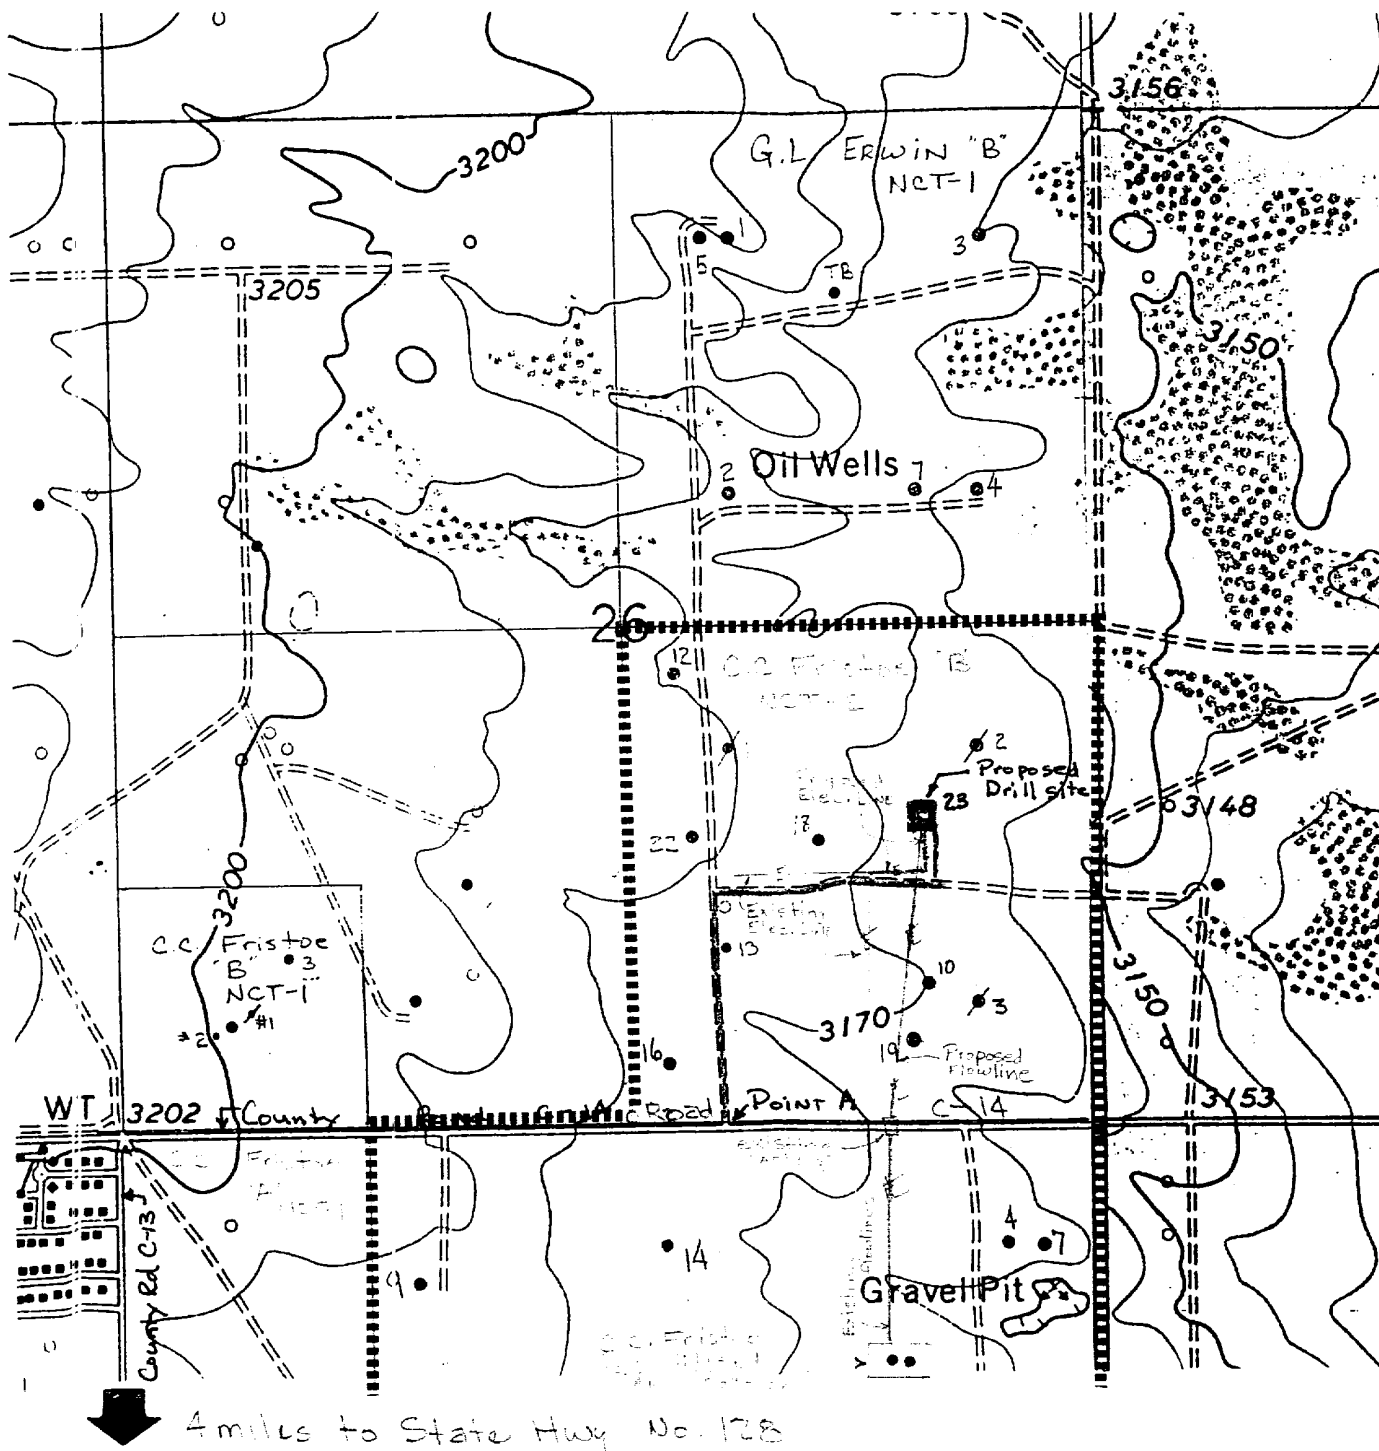

LEGEND OF SYMBOLS

- = Access Road (Yellow)
- = Resource Road on State Land (Blue)
- = Resource Road on Private Land (Pink)
- = Resource Road on Lease (Brown)
- = Proposed Resource Road (Red)
- E-E- = Proposed Electric Line (Orange)
- FL-FL- = Proposed Production Flowline (Green)
- = Staked Well Location
- = Producing Well Location
- ⦿ = Water Injection Well
- = Found 1" Iron Pipe With Brass Cap
- ⊙ = Found 2 or 3" Iron Pipe With Brass Cap

EXHIBIT "A" ACCESS ROAD AND FACILITIES MAP

TEXACO EXPLORATION AND PRODUCTION Inc.

C. C. Fristoe "B" NCT-2 No. 23
1650' FSL & 940' FEL Section 26,
T-24-S, R-37-E, Lea County, NM

Drawn by: J.S. Piper


Scale: 1" = 1000 Feet

Date: Nov. 24, 1997





Supervisor: Phil Ryan

Checked by: D. Bellows

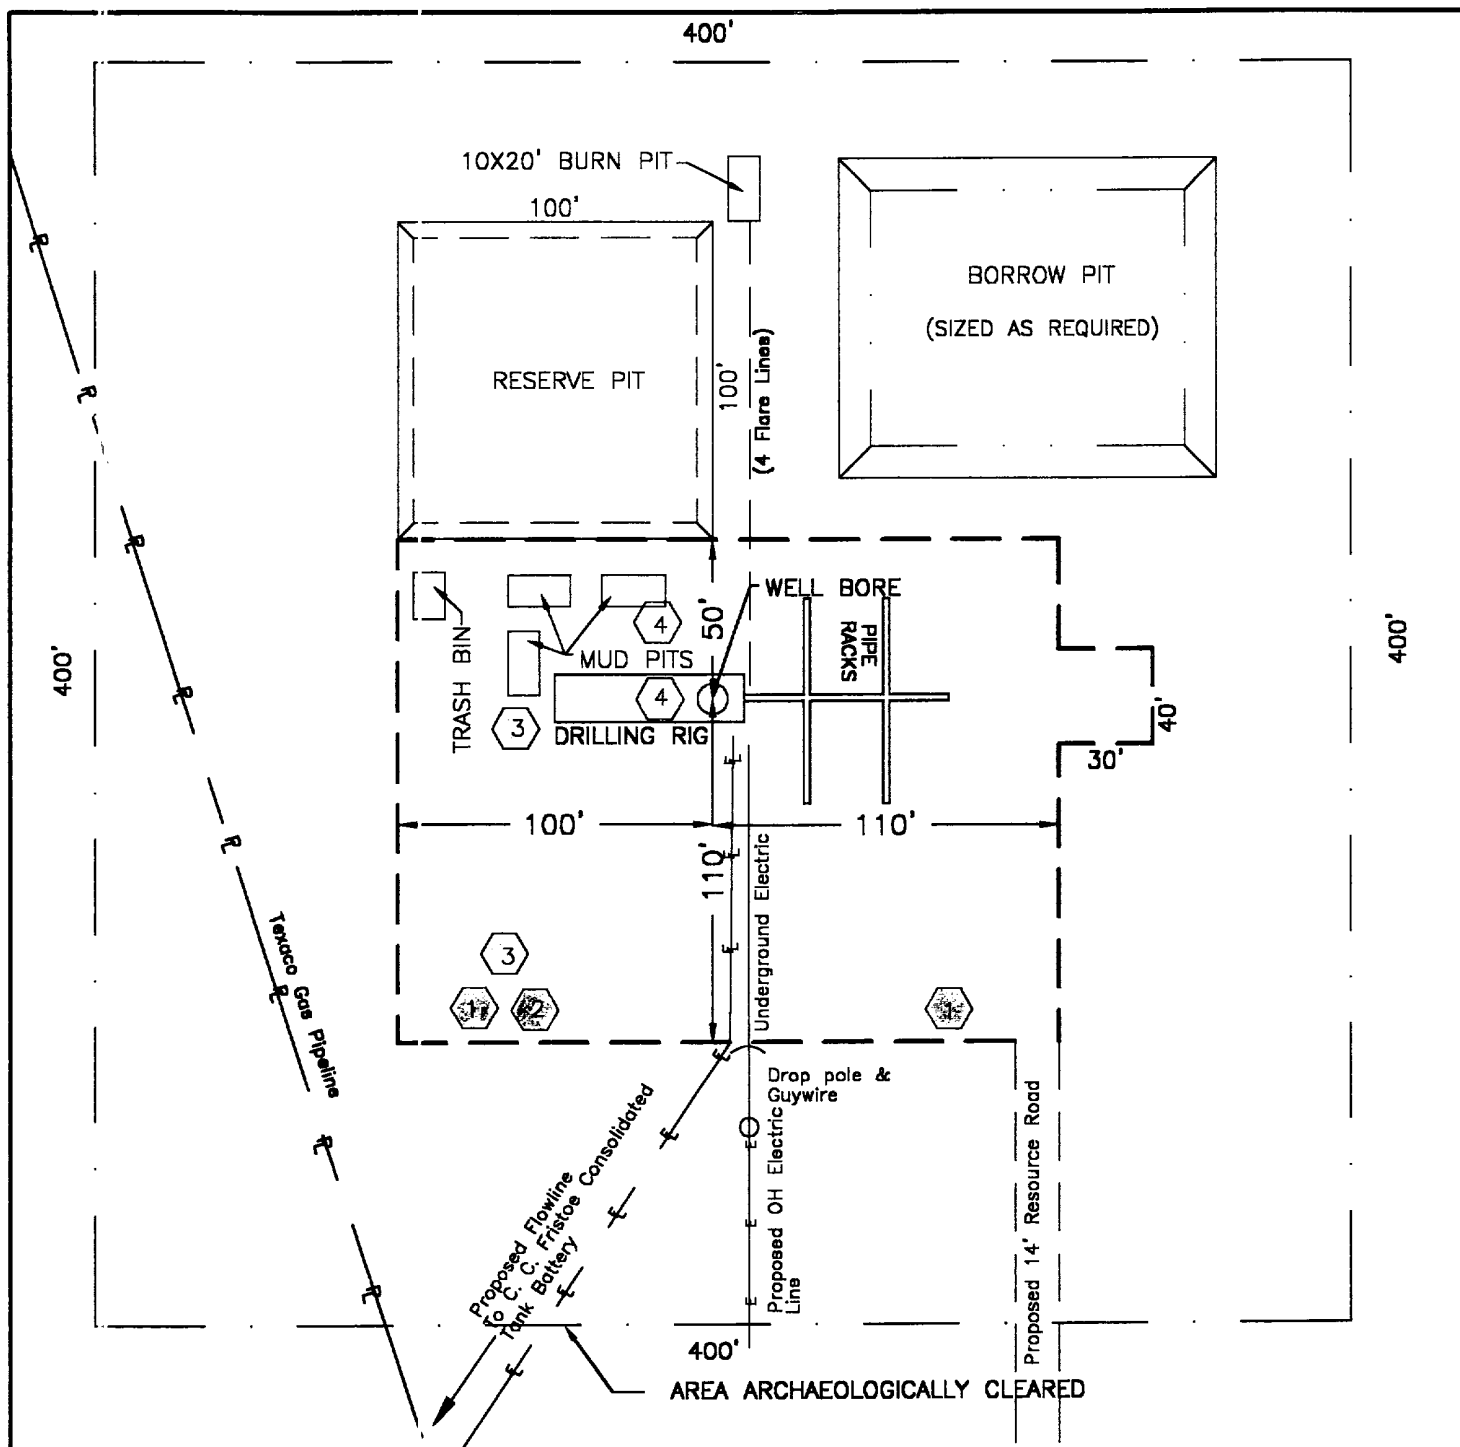Sheet 6 of 8



H₂S DRILLING OPERATION PLAN

-  Briefing Station
-  H₂S Safety Trailer
-  Windssocks
-  H₂S Detectors, S shale Shaker, Rotating Head, Rig Floor

Prevailing Wind from the South

EXHIBIT "B" DRILLING RIG LAYOUT

TEXACO EXPLORATION AND PRODUCTION INC.

C. C. Fristoe "B" Federal NCT-2 No. 23
1650' FSL & 940' FEL, Section 26
T-24-S, R-37-E, Lea County, NM

Drawn by: D. M. Ballew

Scale: 1" = 60'

Date: December 1, 1997

PHIL RYAN

Checked by: J. S. Plper

Sheet 7 of 8

DISTRICT I
P. O. Box 1980, Hobbs, NM 88240

DISTRICT II
P. O. Drawer DD, Artesia, NM 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

DISTRICT IV
P. O. Box 2088, Santa Fe, NM 87504-2088

State of New Mexico
Energy, Minerals and Natural Resources Department

OIL CONSERVATION DIVISION

PO Box 2088
Santa Fe, NM 87504-2088

Form C-102
Revised February 10, 1994

Instructions on back

Submit to Appropriate District Office


State Lease-4 copies
Fee Lease-3 copies

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number 30-C25-34261		Pool Code 35280		Pool Name Justis Blinbery & Justis Tubb Drinkard					
Property Code 10944		Property Name C. C. Fristoe "B" Federal NCT-2			Well Number 23				
OGRID No. 22351		Operator Name TEXACO EXPLORATION & PRODUCTION, INC.			Elevation 3166'				
10 Surface Location									
UL or lot no. 1	Section 26	Township 24-S	Range 37-E	Lot Idn	Feet from the 1650'	North/South line South	Feet from the 940'	East/West line East	County Lea
11 Bottom Hole Location If Different From Surface									
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
12 Dedicated Acres 40		13 Joint or Infill		14 Consolidation Code		15 Order No.			

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION.

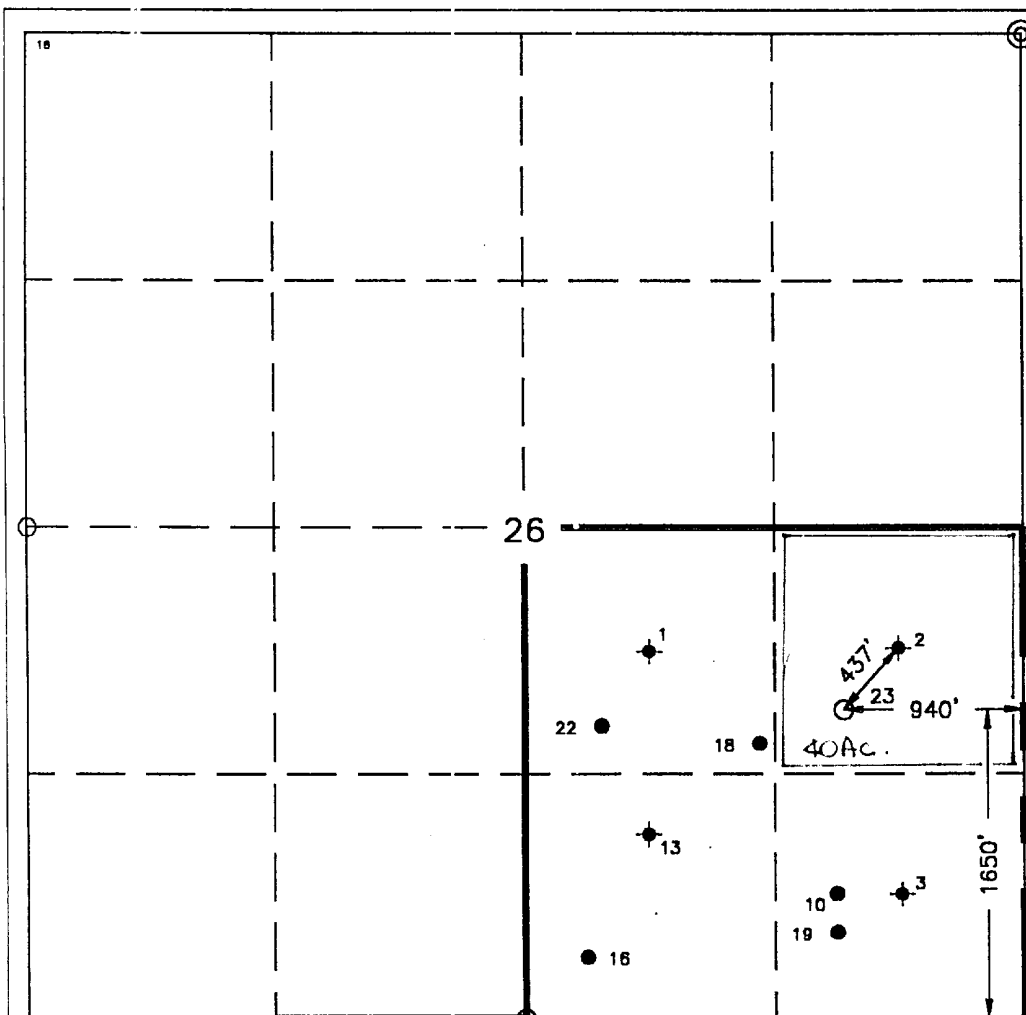

16 OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.

Signature

Printed Name

Phil Ryan

Position

Engineer's Assistant

Company

Texaco Expl. & Prod. Inc.

Date

December 1, 1997

17 SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my knowledge and belief.

Date Surveyed

November 14, 1997

Signature & Seal of
Professional Surveyor

Certificate No.

7254 John S. Piper

Sheet 8 of 8

HYDROGEN SULFIDE DRILLING OPERATIONS PLAN

C. C. FRISTOE 'B' FEDERAL NCT-1 WELL No. 23

RADIUS OF EXPOSURE

100 PPM: 26 feet

500 PPM: 12 feet Based on 300ppm H₂S and 380 MCF.

TRAINING

Every person involved in the wellsite operation will be informed of the characteristics of hydrogen sulfide, its danger, safe procedures to be used when it is encountered, use of detection equipment, use of protective breathing equipment, and first aid procedures for regular rig personnel.

On site training will be provided by Texaco prior to reaching Order 6 compliance depth. The Texaco Drilling Supervisor is responsible for insuring all persons working on location have been provided training.

EXHIBIT A

Topographic map of location and surrounding area.

EXHIBIT B

The wellsite layout contains the following information:

1. Drill rig orientation
2. Prevailing wind direction
3. Location of all briefing areas
4. Location of access road
5. Location of flare line
6. Location of windsocks
7. Location of H₂S Safety Trailer

EXHIBIT C

Well Control Equipment

PROTECTIVE EQUIPMENT

4 - 30 minute SCBA's: 2 located at each Briefing Station. An additional SCBA will be located at the Tool Pusher's trailer, if used.

5 - 5 minute escape packs will be located in the Dog House.

Means of communication while using protective equipment will be hand signals.

H2S SENSORS

H2S sensors will be located at (1) Shale Shaker (2) Rotating Head and (3) Rig Floor.

A light will be located on the rig floor. It will be set to go off at 10 PPM. It will be visible from anywhere on the location.

A siren will be located on the rig floor. It will be set to go off at 15 PPM.

Texaco Drilling Supervisor will maintain a portable H2S monitor.

MUD PROGRAM

A Fresh Water/ Brine system will be used. Ph will be maintained at 10 or higher if H2S is encountered. Sufficient quantities of H2S scavenger will be on location for use as required.

Drilling will be through an on site gas separator to separate gas from the drilling fluid with gas vented down a flare line equipped with an igniter.

METALLURGY

All wellheads, trees, BOP's, rotating heads, choke manifolds and piping will be constructed/trimmed with materials suitable for H2S service.

All casing and tubing will be no greater than 80000 psi yield strength and no greater than a Rockwell C-22 hardness.

OTHER REQUIREMENTS OF ORDER 6

The flare line (item 4 of exhibit I) will be equipped with a propane ignition.

The flare gun and flares will be located in the H2S Safety Trailer.

Communications for the location will be by Rig Telephone.


Wind direction indicators will be on the rig floor and at one briefing station with at least one visible from all points on the location.

Caution/danger signs and flags will be maintained at all entrances into the location.

An automatic remote-controlled choke will not be used. We will have installed and tested two manual, H2S trimmed, chokes.

WELL TESTING

No DST's are planned.

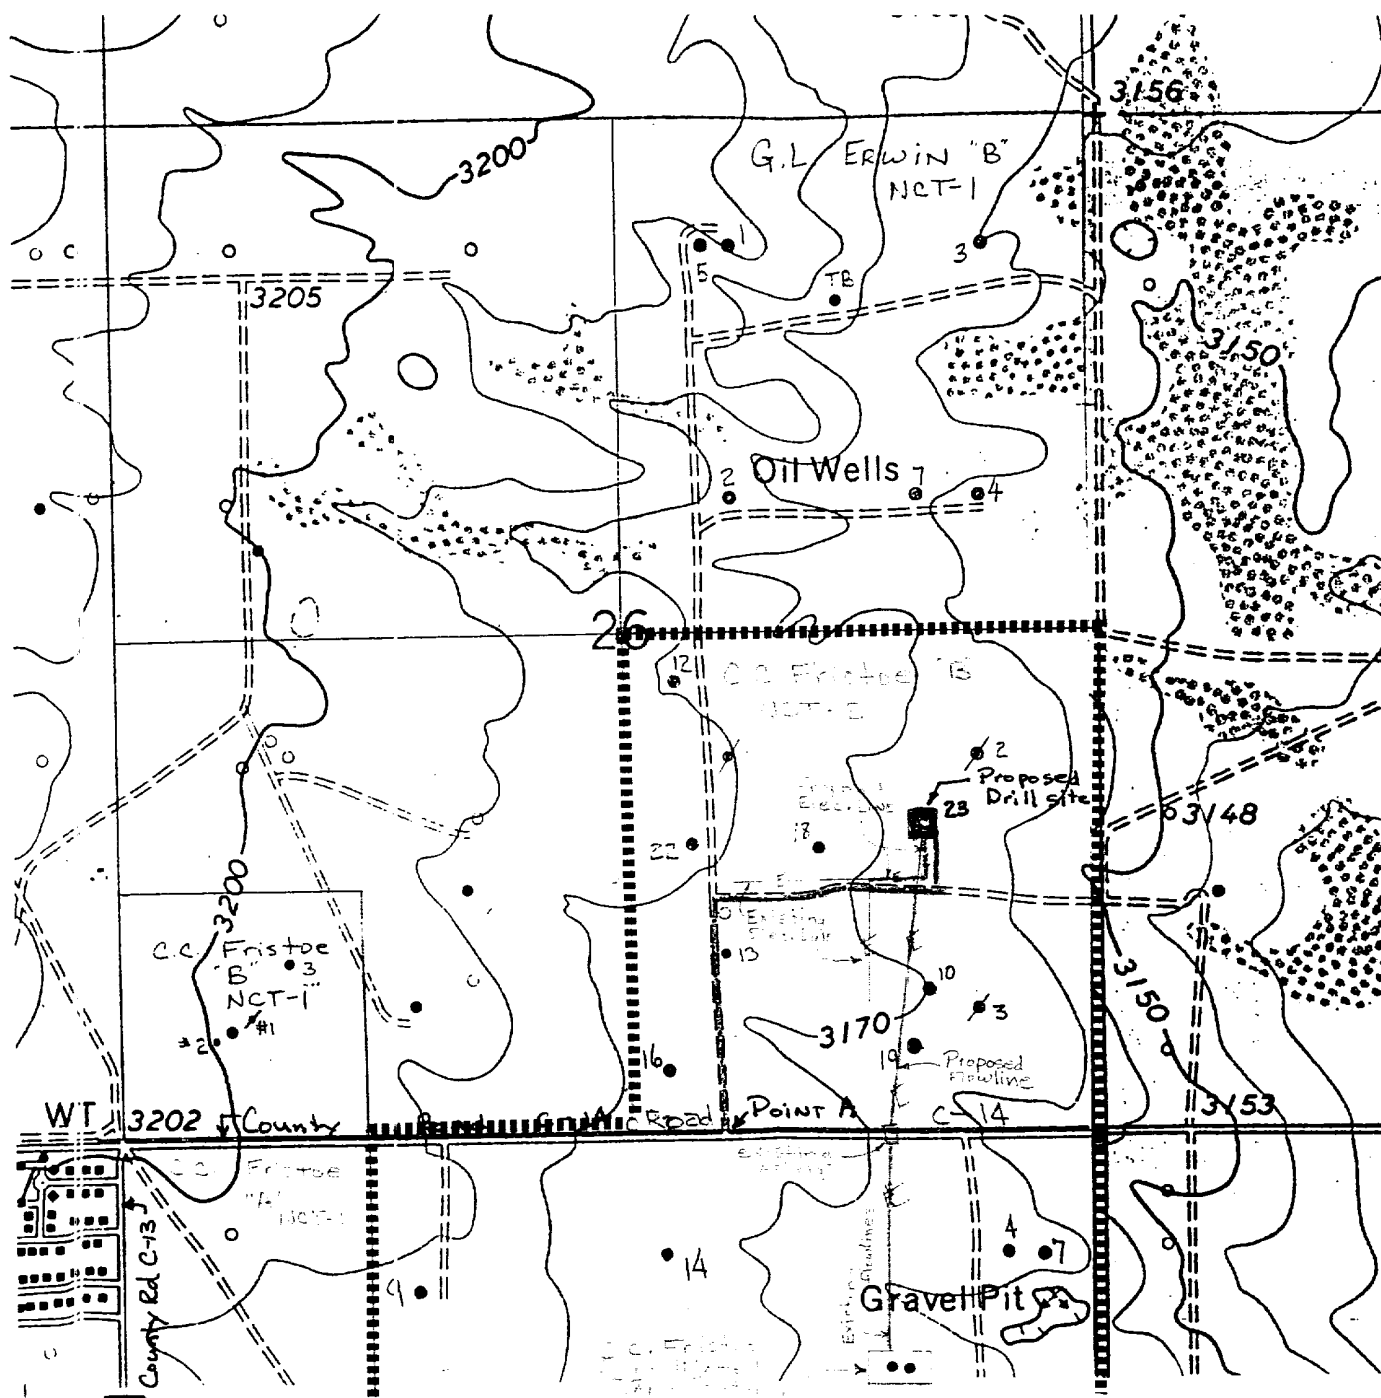

4 miles to State Hwy No. 178

LEGEND OF SYMBOLS

- = Access Road (Yellow)
- = Resource Road on State Land (Blue)
- = Resource Road on Private Land (Pink)
- = Resource Road on Lease (Brown)
- = Proposed Resource Road (Red)
- - - = Proposed Electric Line (Orange)
- - - = Proposed Production Flowline (Green)
- o = Staked Well Location
- = Producing Well Location
- = Water Injection Well
- o = Found 1" Iron Pipe With Brass Cap
- o = Found 2 or 3" Iron Pipe With Brass Cap
- = Unit or Lease Boundary

EXHIBIT "A" ACCESS ROAD AND FACILITIES MAP

TEXACO EXPLORATION AND PRODUCTION Inc.

C. C. Fristoe "B" NCT-2 No. 23
1650' FSL & 940' FEL Section 26,
T-24-S, R-37-E, Lea County, NM

Drawn by: J.S. Piper

Scale: 1" = 1000 Feet


Date: Nov. 24, 1997

Supervisor: Phil Ryan

Checked by: D. Ballew

Sheet 6 of 8



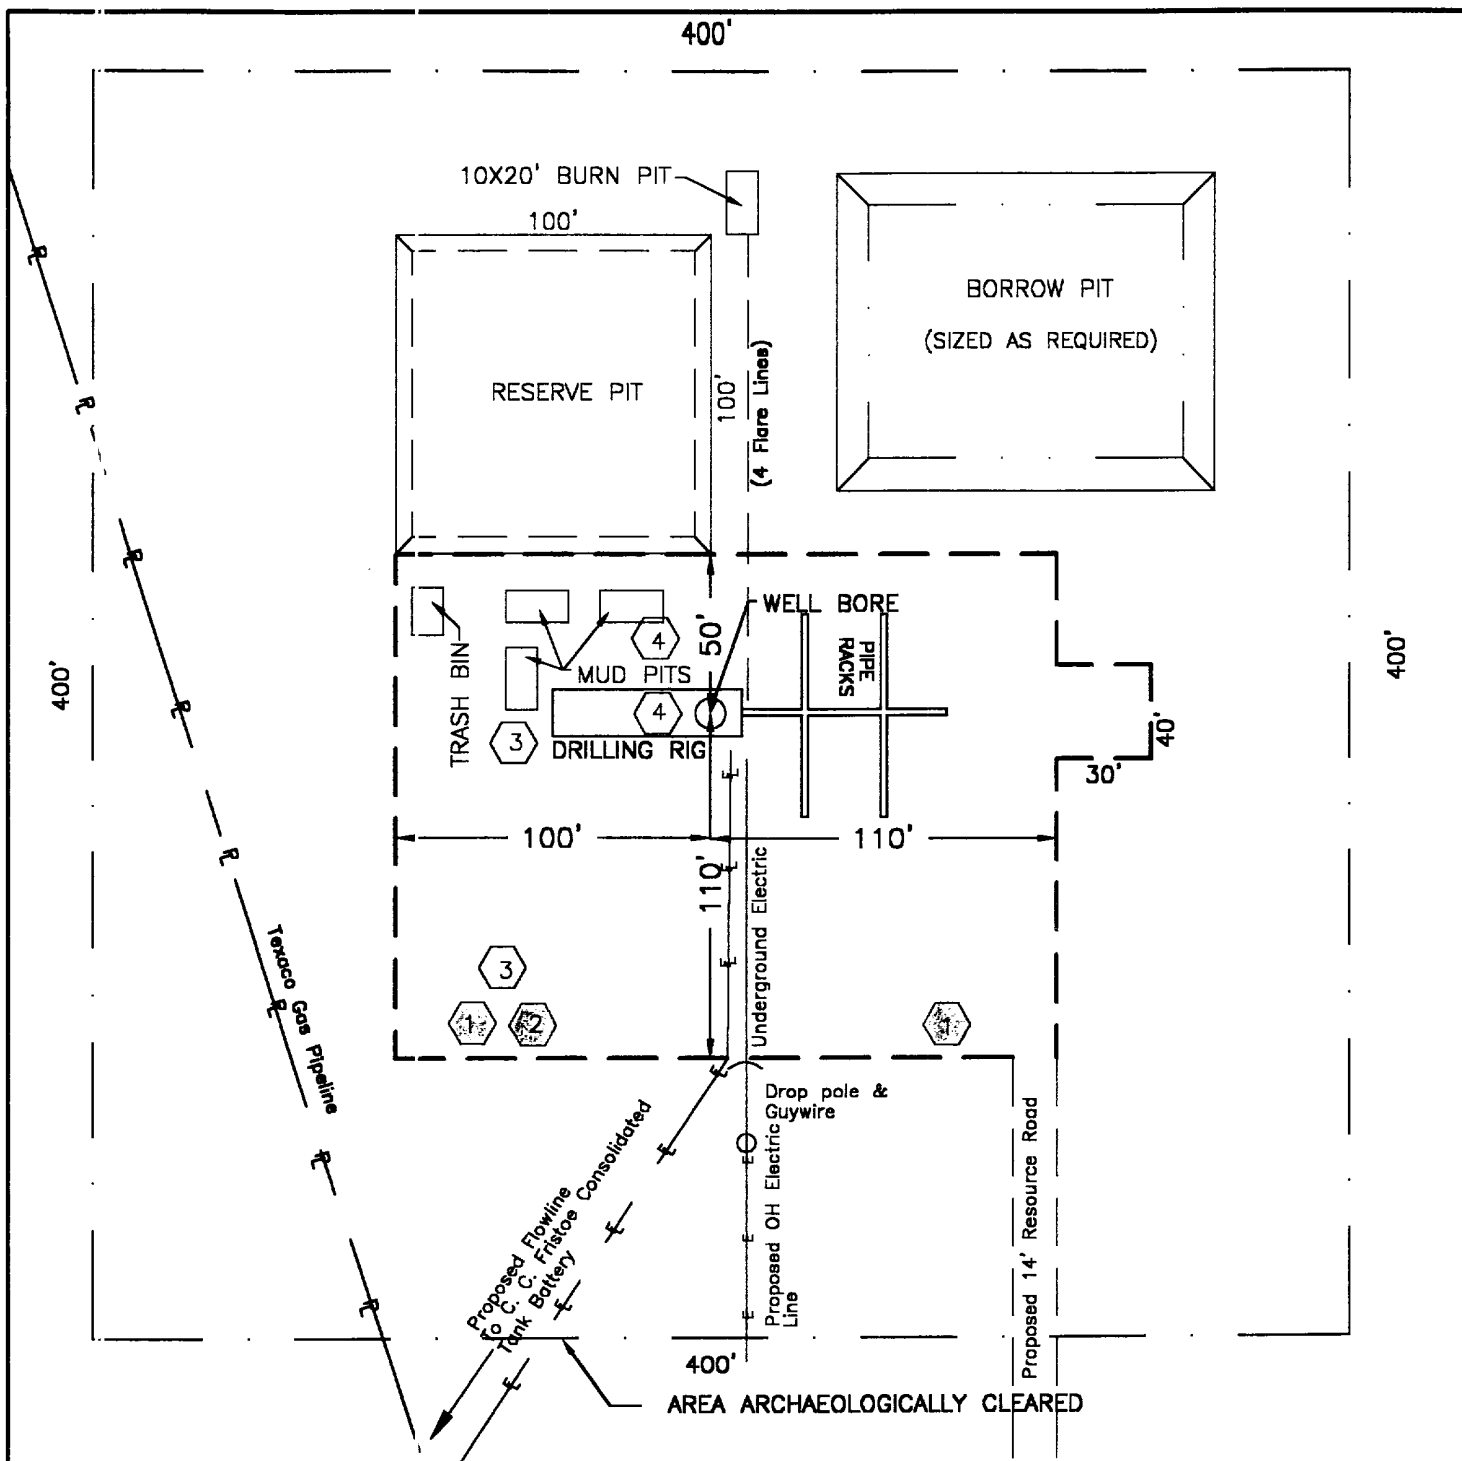

H₂S DRILLING OPERATION PLAN



Briefing Station



H₂S Safety Trailer



Windsocks



H₂S Detectors, S shale Shaker,
Rotating Head,
Rig Floor

Prevailing Wind from the South

EXHIBIT "B" DRILLING RIG LAYOUT

TEXACO EXPLORATION AND PRODUCTION INC.

C. C. Fristoe "B" Federal NCT-2 No. 23
1650' FSL & 940' FEL, Section 26
T-24-S, R-37-E, Lea County, NM

Drawn by: D. M. Ballew


Scale: 1" = 60'

Date: December 1, 1997

PHIL RYAN



Checked by: J. S. Piper

Sheet 7 of 8



**DRILLING CONTROL
CONDITION II-B 3000 WP
FOR AIR DRILLING OR
WHERE NITROGEN OR AIR BLOWS ARE EXPECTED**

H₂S TRIM REQUIRED
YES _____ NO X

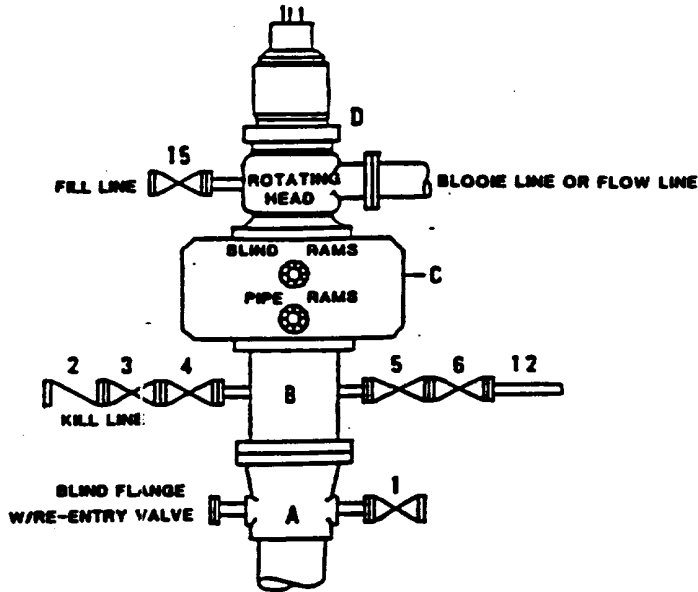

DRILLING CONTROL

MATERIAL LIST - CONDITION II - B

- | | |
|----------------|---|
| A | Texaco Wellhead |
| B | 3000# W.P. drilling spool with a 2" minimum flanged outlet for kill line and 3" minimum flanged outlet for choke line. |
| C | 3000# W.P. Dual ram type preventer, hydraulic operated with 1" steel, 3000# W.P. control lines (where sub-structure height is adequate, 2 - 3000# W.P. single ram type preventers may be utilized). |
| D | Rotating Head with fill up outlet and extended Bloode Line. |
| 1,3,4,
7,8, | 2" minimum 3000# W.P. flanged full opening steel gate valve, or Halliburton Lo Torc Plug valve. |
| 2 | 2" minimum 3000# W.P. back pressure valve. |
| 5,6,9 | 3" minimum 3000# W.P. flanged full opening steel gate valve, or Halliburton Lo Torc Plug valve. |
| 12 | 3" minimum schedule 80, Grade "B", seamless line pipe. |
| 13 | 2" minimum x 3" minimum 3000# W.P. flanged cross. |
| 10,11 | 2" minimum 3000# W.P. adjustable choke bodies. |
| 14 | Cameron Mud Gauge or equivalent (location optional in choke line). |
| 15 | 2" minimum 3000# W.P. flanged or threaded full opening steel gate valve, or Halliburton Lo Torc Plug valve. |




TEXACO, INC.
MIDLAND DIVISION
MIDLAND, TEXAS



SCALE	DATE	EST NO	DRG. NO.
DRAWN BY			
CHECKED BY			
APPROVED BY			

EXHIBIT C

1320
+ 60
200



654-012-1000

1000