


DRILLING CONTROL CONDITION V-B - 10,000 PSI WP

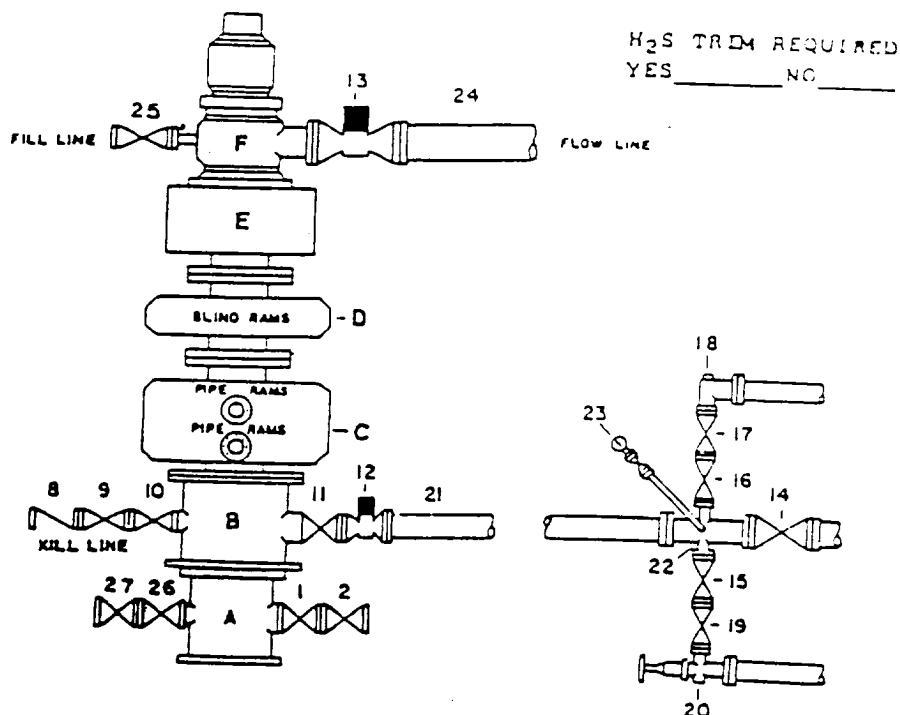

H₂S TRIM REQUIRED
YES _____ NO _____

DRILLING CONTROL MATERIAL LIST - CONDITION V-B

- A Texaco Wellhead
- B 10,000 W.P. Drilling Spool with a minimum 2" flanged outlet for kill line and 4" minimum flanged outlet for choke line
- C 10,000 W.P. Dual Variable Ram Type preventer, hydraulic operated with 1" steel, 5000 W.P. control line
- D 10,000 W.P. Single Ram Type preventer, hydraulic operated with 1" steel, 5000 W.P. control lines
- E 10,000 W.P. Annular preventer, hydraulic operated with 1" steel, 5000 W.P. control lines
- F When required - Rotating Head with fill up outlet and extended bleed line
- 1,2,9,10, 12,13,14, 15,16,17, 19,20,21 2" minimum 10,000 W.P. flanged full opening steel gate valve, or Halliburton Lo Torc Plug valve
- 8 2" minimum 10,000 W.P. back pressure valve
- 11,14 4" minimum 10,000 W.P. flanged full opening steel gate valve
- 12 4" minimum 10,000 W.P. flanged full opening hydraulic valve
- 13 When required - 10" minimum 1000 W.P. flanged full opening hydraulic valve
- 21 4" minimum 10,000 W.P. 4130 mechanical tubing with flanged ends, or equivalent
- 22 2" minimum x 4" minimum 10,000 W.P. flanged cross
- 16 2" minimum 10,000 W.P. automatic choke
- 20 2" minimum 10,000 W.P. adjustable choke equipped with carbide trim
- 23 Cameron Mud Gauge or equivalent (location in choke line optional)
- 24 When required - 10" steel flow line
- 25 2" minimum 5000 W.P. flanged or threaded full opening steel gate valve or Halliburton Lo Torc plug valve

SCALE:	DATE	EST NO	DRG NO
DRAWN BY:			
CHECKED BY:			
APPROVED BY:			



TEXACO, INC.
HIGHLAND DIVISION
HIGHLAND TEXAS



EXHIBIT G-1

ABOVE DATE DOES NOT
INDICATE WHEN
CONFIDENTIAL LOGS
WILL BE RELEASED

ELF

11/24/72