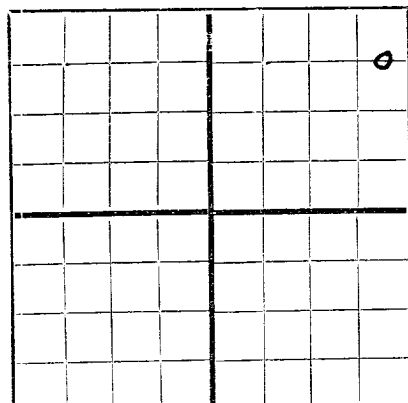


NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New MexicoAREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Culbertson & Irwin, Inc. Box 1071, Midland, Texas
Company or Operator Address
Maggie Dunn Well No. **3** in **NE/4** of Sec. **24**, T. **24S**
Lease
R. **36E**, N. M. P. M., **Langlie-Battix** Field, **Lea** County.
Well is **660** feet south of the North line and **330** feet west of the East line of **Section 24**.
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is **Fowler Hair (surface)**, Address **Jal., New Mexico**
If Government land the permittee is, Address.
The Lessee is, Address.
Drilling commenced **4/27** 19 **50** Drilling was completed **5/12** 19 **50**
Name of drilling contractor **Oil Well Remedial Service**, Address **Odessa, Texas**
Elevation above sea level at top of casing **3310** feet.
The information given is to be kept confidential until **Not confidential** 19.

OIL SANDS OR ZONES

No. 1, from **3020** to **3030** No. 4, from to
No. 2, from **3050** to **3065** No. 5, from to
No. 3, from **3135** to **3155** No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from **none** to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
8 5/8	28#	8	S.H.	285	T.P.				
5 1/2	14#	8	New	2994	Float				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
11	8 5/8	285	125	Halliburton		
8	5 1/2	2994	400	" 2-stage		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		none				

Results of shooting or chemical treatment
.
.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from **0** feet to **T.D.** feet, and from feet to feet
Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing **5/13** 19 **50**
The production of the first 24 hours was **62** barrels of fluid of which **100** % was oil; **0** % emulsion; **0** % water; and **0** % sediment. Gravity, Be. **37°**
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

OIL WELL REMEDIAL SERVICE, Driller Driller
CONTRACTOR Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this **15th**
day of **May**, 19 **50**

Dorothy Franklin
Notary Public

My Commission expires **June 1, 1951**

Midland, Texas **5/15/50**
Date

Name **W. L. Irwin**Position **President**Representing **Culbertson & Irwin, Inc.**
Company or OperatorAddress **Box 1071, Midland, Texas**

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	150	150	Sand, caliche & gravel
150	250	100	Shale
250	700	450	Red & gray shale
700	900	200	Red shale
900	1190	290	Red rock
1190	1290	100	Anhydrite
1290	1370	80	Salt
1370	1500	130	Anhydrite, salt & red rock
1500	1600	100	Salt
1600	1650	50	Anhydrite
1650	1700	50	Salt
1700	1730	30	Anhydrite
1730	1800	70	Salt
1800	1900	100	Anhydrite, salt & red rock
1900	1980	80	Salt
1980	2030	50	Anhydrite
2030	2270	240	Salt
2270	2470	200	Anhydrite & salt
2470	2600	130	Salt
2600	2650	50	Anhydrite
2650	2850	200	Salt
2850	2880	30	Anhydrite
2880	3005	125	Brown lime & anhydrite
3005	3020	15	Sand & anhydrite
3020	3030	10	Sand
3030	3050	20	Lime
3050	3065	15	Sand
3065	3135	70	Lime, shale & sand
3135	3145	10	Sand
3145	3237	92	Lime, sand & shale

T.D. 3237