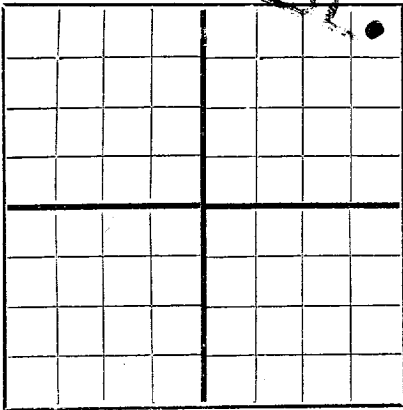


NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

AREA 640 ACRES
LOCATE WELL CORRECTLY

Culbertson & Irwin, Inc. Box 1071, Midland, Texas
Company or Operator
Van Zandt Well No. **2** in **NE 1/4 NE 1/4** of Sec. **25** T. **24S**
Lease
R. **36E** N. M. P. M. **Langlie-Mattix** Field, **Lea** County.
Well is **330** feet south of the North line and **390** feet west of the East line of **Section 25**
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is **May Woolworth** Address **San Angelo, Texas**
If Government land the permittee is Address
The Lessee is Address
Drilling commenced **4/29** 19 **50** Drilling was completed **5/16** 19 **50**
Name of drilling contractor **Oil Well Remedial Service** Address **Odessa, Texas**
Elevation above sea level at top of casing **3287** feet.
The information given is to be kept confidential until **Not confidential** 19

OIL SANDS OR ZONES

No. 1, from **3020** to **3035** No. 4, from **3205** to **3215**
No. 2, from **3045** to **3055** No. 5, from to
No. 3, from **3095** to **3110** No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
8 5/8	28	8	Used	310	T.P.				Surface
5 1/2	15	8	New	2989	Halliburton float				Oil string

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
10-3/4	8-5/8	310	100	Halliburton		
8	5 1/2	2989	400*	"		

*200 sax around shoe; 200 sax thru 2-stage tool @ 1137'.
PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment **Not shot or treated.**

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from **0** feet to **3223** feet, and from feet to feet
Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing **May 18** 19 **50**
The production of the first 24 hours was **88** barrels of fluid of which **100** % was oil; **0** % emulsion; **0** % water; and **0** % sediment. Gravity, Be. **37°**
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

OIL WELL REMEDIAL SERVICE: EMPLOYEES
Eugene Bailey Driller **W. L. Ballard** Driller
C. E. Phelps Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this **20th**
day of **May** 19 **50**

Dorothy Franklin
Notary Public

My Commission expires **June 1, 1951**

Midland, Texas **5/20/50**
Name **W. L. Ballard** Date
Position **President**
Representing **Culbertson & Irwin, Inc.**
Company or Operator
Address **Box 1071, Midland, Texas**

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	150	150	Sand & caliche
150	250	100	Sand & gravel
250	500	250	Red & gray shale
500	750	250	Red shale
750	1100	350	Red rock
1100	1200	100	Anhydrite
1200	1275	75	Salt
1275	1400	125	Anhydrite, salt & red sand
1400	1500	100	Salt
1500	1550	50	Anhydrite
1550	1600	50	Salt
1600	1650	50	Anhydrite
1650	1900	250	Salt
1900	1950	50	Anhydrite & salt
1950	2200	250	Salt
2200	2350	150	Salt & anhydrite
2350	2550	200	Salt
2550	2800	250	Salt
2800	2860	60	Anhydrite
2860	2995	135	Brown lime
2995	3020	25	Lime & sand
3020	3035	15	Sand
3035	3045	10	Lime
3045	3055	10	Sand
3055	3095	40	Lime, sand & shale
3095	3110	15	Sand
3110	3205	95	Lime, sand & shale
3205	3215	10	Sand & lime
3215	3223	8	Lime

T.D. 3223