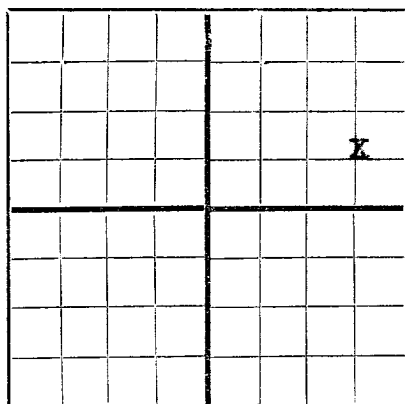


N

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

AREA 640 ACRES
LOCATE WELL CORRECTLY

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

W-G Company P.O. Box 1490, Alice, Texas
Company or Operator Address
E. E. Jacks 15-B Well No. 2 in NE 1/4 of Sec. 15, T. 24 S
Lease
R. 37 E, N. M. P. M. Langle-Wattix Field, Lee County.
Well is 1980' feet south of the North line and 650' feet west of the East line of Sec. 15 T 24 S R 37 E.
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is Address
If Government land the permittee is Continental Oil Company Address Ponca City, Okla.
The Lessee is W-G Company Address Box 1490, Alice, Texas
Drilling commenced February 12, 1949 Drilling was completed March 16, 1949
Name of drilling contractor R. L. Kirkwood Address Box 1490, Alice, Texas
Elevation above sea level at top of casing feet.
The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 3356' to 3366' No. 4, from 3506' to 3515'
No. 2, from 3422' to 3440' No. 5, from to
No. 3, from 3483' to 3493' No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from None to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	OUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
<u>10 3/4"</u>	<u>40 1/2</u>	<u>8</u>	<u>Rep.</u>	<u>225'</u>	<u>Halliburton</u>				<u>Surface</u>
<u>7"</u>	<u>20</u>	<u>8</u>	<u>"</u>	<u>3326'</u>	<u>"</u>				<u>Oil string</u>

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
<u>13 1/2"</u>	<u>10 3/4"</u>	<u>234'</u>	<u>150</u>	<u>Halliburton</u>		
<u>8 1/2"</u>	<u>7"</u>	<u>3335'</u>	<u>500</u>	<u>"</u>		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
<u>5 1/2"</u>		<u>Glycerine</u>	<u>675 qts.</u>	<u>3/15</u>	<u>33652-3515'</u>	<u>3525'</u>

Results of shooting or chemical treatment Did not test prior to shooting

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 3525 feet, and from feet to feet
Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing March 17, 1949
The production of the first 24 hours was 170 barrels of fluid of which 98 % was oil; 0 % emulsion; 0 % water; and 2 % sediment. Gravity, Be. 38
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas.
Rock pressure, lbs. per sq. in.

EMPLOYEES

J. E. Smith, Driller C. C. Meek, Driller
M. B. Southerland, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 18th
day of March, 19 49

Notary Public

My Commission expires April 23, 1952

Hobbs, New Mexico 3/18/49
Place Date

Name M. W. Taylor, Jr.
Position Agent

Representing W-G Company
Company or Operator

Address Box 1490, Alice, Texas

COMMISSION EXPIRES

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	35		Surface soil & caliche
35	93		Sand
93	1045		Red bed
1045	1170		Anhydrite & gyp
1170	1300		Salt
1300	1350		Anhydrite
1350	1400		Salt
1400	1435		Anhydrite & salt
1435	1640		Salt
1640	1710		Anhydrite & gyp
1710	1890		Salt
1890	1945		Anhydrite & gyp
1945	1975		Salt
1975	2180		Anhydrite & gyp w/salt stks.
2180	2235 2345		Salt
2345	2500		Anhydrite & gyp
2500	2760		Anhydrite & lime
2760	3095		Lime
3095	3130		Anhydrite & lime
3130	3265		Lime
3265	3302		Bentinite & lime
3302	3356		Lime
3356	3366		Hard sandy lime
3366	3422		Lime
3422	3440		Sandy lime
3440	3483		Lime
3483	3493		Sandy lime
3493	3506		Lime
3506	3515		Sandy lime
3515	3525		Delomite T. D.