


Form 1000  
(Feb. 1951)  
**DUPLICATE**  
C O P Y

(SUBMIT IN TRIPLICATE)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Land Office Las Cruces

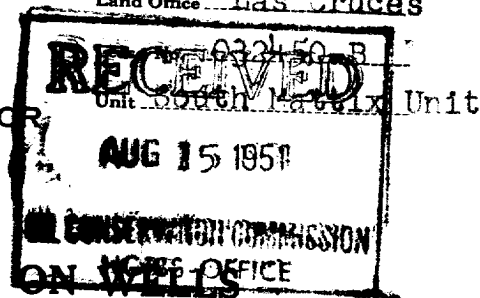

**SUNDRY NOTICES AND REPORTS ON WELLS**

NOTICE OF INTENTION TO DRILL.....	<input checked="" type="checkbox"/>	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....		SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....		SUBSEQUENT REPORT OF REDRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....		SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....		SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

Hobbs, New Mexico - Dec. 18, 1951

Well No. 1 is located 1980 ft. from [N] line and 1980 ft. from [E] line of sec. 15

NW/4 Section 15 T-24-S R-37-E NMPM  
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)  
Fowler T-24S R-37E NMPM  
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is 3241 ft. (Est)

**DETAILS OF WORK**

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudlogging jobs, cementing points, and all other important proposed work)

We propose to drill an Ellenburger test well with rotary tools to approximately 9850'. All casing cementing and shut-off tests will be in accordance with approved methods of the U. S. Geological Survey.

The following casing program will be used:  
13-3/8" @ 280' with 350 sacks cement or sufficient to circulate to surface.  
9-5/8" @ 3800' to be cemented in two stages: 375 sacks 8% gel plus 100 sacks neat on bottom; 150 sacks neat in second stage.  
7" @ 9850' cemented in 2 stages with 250 sacks 8% gel plus 125 sacks neat on bottom and second stage cemented at 7000' with 300 sacks 8% gel plus 50 sacks neat. (Over)

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Stanolind Oil and Gas Company

Address P. O. Box "F"

Hobbs, New Mexico

By /s/ R. O. Courtright, Jr.

Title Field Engineer

Copies of sample log, electrical logs, temperature and other surveys will be submitted to your office upon completion of the well.

Copies of the location plat are attached.