

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

## SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-02 for such proposals.)

1. oil well ☒ gas well ☐ other ☐
2. NAME OF OPERATOR  
Amoco Production Company
3. ADDRESS OF OPERATOR  
P.O. Drawer "A", Levelland, TX 79336
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
AT SURFACE: 660' ENL & 660' FWL, Sec 15  
AT TOP PROD. INTERVAL: (Unit D, NW/4 NW/4)  
AT TOTAL DEPTH:
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

## REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐  
FRACTURE TREAT ☐  
SHOOT OR ACIDIZE ☐  
REPAIR WELL ☐  
PULL OR ALTER CASING ☐  
MULTIPLE COMPLETE ☐  
CHANGE ZONES ☐  
ABANDON\* ☐  
(other) ☐

## SUBSEQUENT REPORT OF:

☐  
☐  
☒  
☒  
☐  
☐  
☐  
☐  
☐

5. LEASE  
LC-032450 (a)
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
7. UNIT AGREEMENT NAME  
South Mattix Unit
8. FARM OR LEASE NAME  
South Mattix Unit
9. WELL NO.  
7
10. FIELD OR WILDCAT NAME  
Fowler Upper Yeso
11. SEC., T., R., M. OR BLK. AND SURVEY OR AREA  
15-24-37
12. COUNTY OR PARISH  
Lea
13. STATE  
NM
14. API NO.
15. ELEVATIONS (SHOW DF, KDB, AND WD)  
3273 RDB

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

Moved in service unit 3/10/79. Pulled rods and tubing. Set retrievable bridge plug at 5,756'. Spotted 200 gal 15% NE acid 5420'-5697'. Set bridge plug at 5406'. Spotted 200 gal 15% Ne acid 5,774'-5,355'. Set packer at 5,121'. Acidized with 1800 gal 15% NE acid. Swabbed well. Ran tubing, rods, and pump. Released service unit 3/30/79.

## Final Report

OC-3/10/79

COMP-3/30/79

PPWO- 0 BO x 0 BW x 0 mcf in 24 hrs.

PAWO- 50 BO x 99 BW x 195 mcf in 24 hrs.

Subsurface Safety Valve: Manu. and Type

RECEIVED

APR 12 1979

U. S. GEOLOGICAL SURVEY  
HOBBS, NEW MEXICO

Set @ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Ray Cox TITLE Admin. Supervisor DATE April 11, 1979

(This space for Federal or State office use)


APPROVED BY

CONDITIONS OF APPROVAL, IF ANY:

TITLE

0+4-USGS, H 1-Arco  
1-Div 1-Conoco  
1-RWA 1-Tenneco  
1-Susp 1-Chevron

\*See Instructions on Reverse Side

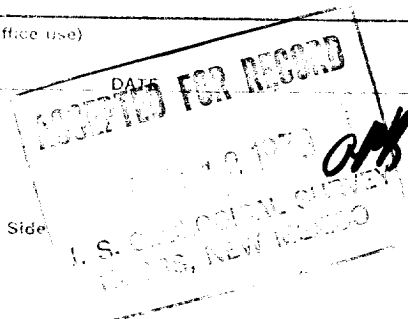

1960  
COMMUNICATIONS

RECEIVED  
APR 1 1970  
COMMUNICATIONS COMM.