



Amoco Production Company

ENGINEERING CHART

SHEET NO.

OF

FILE

APPN

DATE 11-07-80

BY D.W.(CND)


SUBJECT STATE "D" TRACT 15 # 3

LANGLIE-MATTIX QUEEN

330 ENL : 2050 FEL, SEC 16, T24S, R37E
LEA. County, NEW MEXICO

Completed: 6-01-78

ELEV: 3287' R.D.B.
3277' G.L.

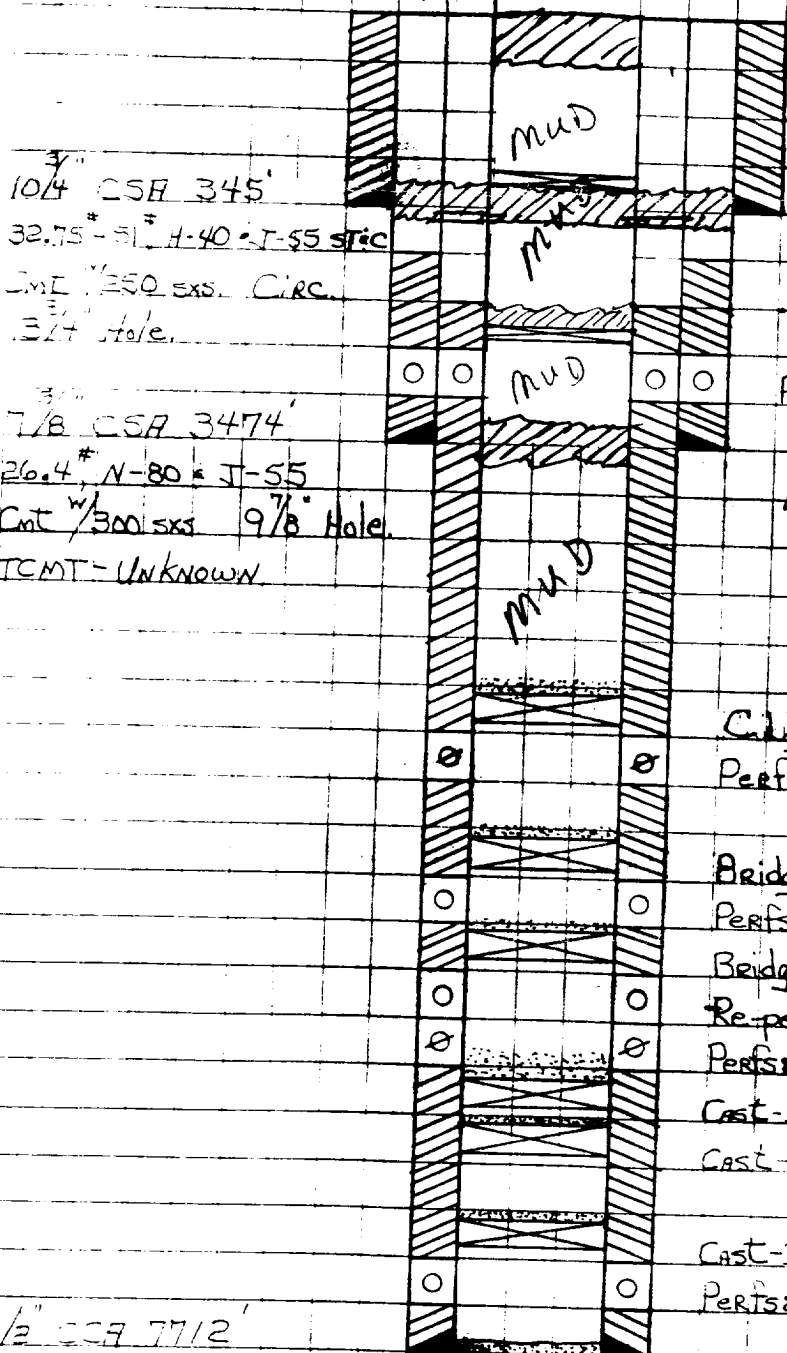

15 SX CMT Plug @ Surface

Set CMT Retainer, at 295'
Perforate at 395' and pump
a 100' CMT Plug inside and outside
the pipe at the shoe of the surface pipe
CIBP @ 3170' Cap w/ 35 CMT

Perfs: 3230-54, 3280-3303, 11-23, 38-49,
65-90 w/ 2 JSPE

100' CMT Plug 3424'-3524'

CIBP set at 3700' w/ 35' cap. PBD-3665'
Perfs: 3768-3811 w/ 2 JSPE

Bridge Plug set at 5000' w/ 35' cap.
Perfs: 5078-82 w/ 2 JSPE

Bridge Plug at 5305' w/ 35' cap. (PBD-5270')
Re-perfed: 5509-12, 37, 40-44, 51-54 w/ 2 JSPE
Perfs: 5296-5594 w/ 2 SPE (non-continuous)

Cast-Iron Bridge Plug at 5610'
Cast-Iron Bridge Plug at 6756' w/ 2 SXS cap. PBD-6740'

Cast-Iron Bridge Plug at 7600' w/ 2 SXS cap.
Perfs: 7654-7705 w/ 2 JSPE

4 1/2" CSA 7712'

25" J-55 LT.C.C. TD-7712'

ST.C. Cmt w/ 600 SXS. PBD-3665'

6 1/4" Hole.

TCMT-2170'