

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☒ well gas ☐ well other ☐
2. NAME OF OPERATOR  
Amoco Production Company
3. ADDRESS OF OPERATOR  
P. O. Box 68, Hobbs, NM 88240
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
AT SURFACE: 710' FNL X 1930' FWL, Unit C  
AT TOP PROD. INTERVAL: Sec. 15, T-24-S, R-37-E  
AT TOTAL DEPTH:


16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

- TEST WATER SHUT-OFF ☐  
FRACTURE TREAT ☐  
SHOOT OR ACIDIZE ☐  
REPAIR WELL ☐  
PULL OR ALTER CASING ☐  
MULTIPLE COMPLETE ☐  
CHANGE ZONES ☐  
ABANDON\* ☐  
(other) ☐

SUBSEQUENT REPORT OF:

- ☐  
☐  
☐  
☒  
☐  
☐  
☐  
☐

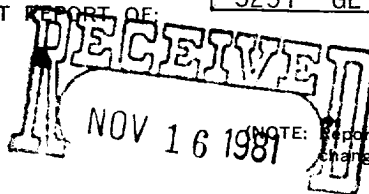

NOTE: Report results of multiple completion or zone change on Form 9-330.)

5. LEASE  
LC-032450 (b)
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
7. UNIT AGREEMENT NAME
8. FARM OR LEASE NAME  
South Mattix Unit Federal
9. WELL NO.  
22
10. FIELD OR WILDCAT NAME  
Fowler Upper Yeso
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
15-24-37
12. COUNTY OR PARISH  
Lea
13. STATE  
NM
14. API NO.
15. ELEVATIONS (SHOW DF, KDB, AND WD)  
3251' GL

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

Moved in service unit 9-28-81. Pmp 75 bbls load water w/2% KCL. Pulled tbg & seating nipple. Pmp 25 bbls water w/2% KCL. Ran cut right shoe & set at 5089'. Ran drill collars, tbg & wash pipe. Circ. Ran tbg & tagged top of fish at 5466'. Washed over 5466'-96'. Pulled tbg, drill collars & wash pipe. Ran 3 joints wash pipe, drill collars, tbg & shoe set at 5089'. Circ. Washed over 5490'-5550'. Circ. Pulled tbg, drill collars & wash pipe. Ran overshot, drill collars & tbg. Caught top of fish at 5466'. Pulled tbg, drill collars & overshot. Recovered 12' piece & 6 joints tbg, seating nipple, & notched collar. Ran 3-7/8" bit, drill collars & tbg w/bit set at 4964'. Circ. & ran tbg & bit to 5444'. Cleaned out 5444'-5683'. Circ. Pulled tbg, drill collars, & bit. Ran tailpipe, pkr & tbg w/tailpipe at 5646' & pkr set at 5144'. Ran pkr to 4536' & tailpipe to 5091'. Ran base gamma ray & temp survey.

0+4-USGS, R 1-Hou 1-Susp 1-CLF  
Subsurface Safety Valve: Manu. and Type

Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct

(See attached page)

SIGNED Cathy L. Forman TITLE Ast. Adm. Analyst DATE 11-12-81

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_  
CONDITIONS OF APPROVAL, IF ANY:

TITLE \_\_\_\_\_

ACCEPTED FOR RECORD

DATE \_\_\_\_\_

NOV 20 1981  
U.S. GEOLOGICAL SURVEY  
ROSWELL, NEW MEXICO