


CONTINENTAL OIL COMPANY
Blow-out Preventer Specifications

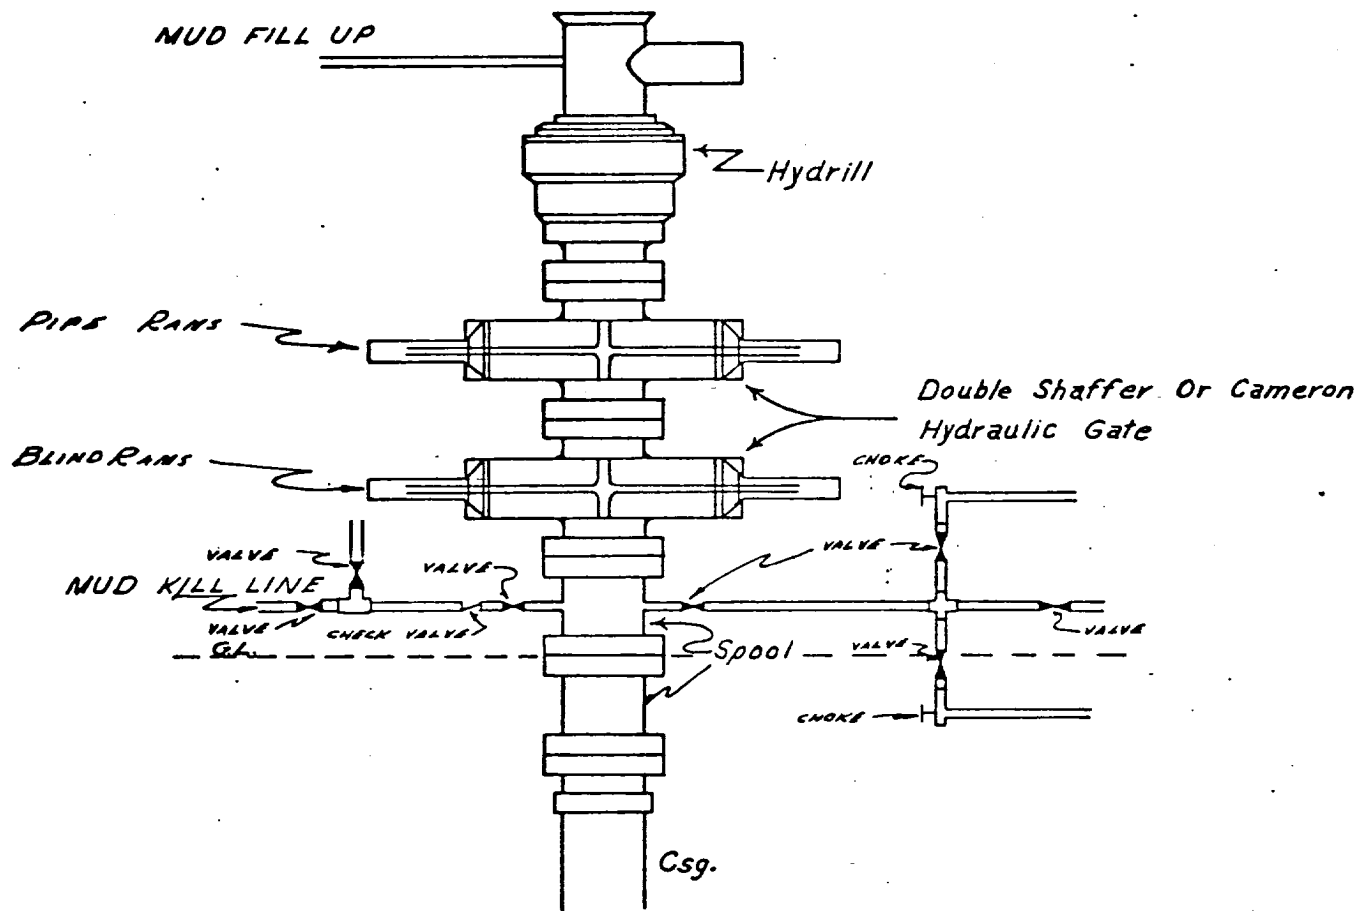

NOTE:

Manual and Hydraulic controls with closing unit no less than 75' from well head.
Remote controls on rig floor.

*DUE TO SUBSTRUCTURE CLEARANCE,
HYDRILL MAY OR MAY NOT BE USED.*

**CONTINENTAL OIL CO.
WARREN UNIT No. 46**