

1. BOP'S TO BE FULLY OPERATED.
2. BOP'S AND ~~ALL~~ FITTINGS MUST BE IN GOOD CONDITION AND WELD AT 3000 PSI W.P. MIN.
3. HOLEHOLE THROUGH WHICH HIGHEST PRESS. SHALL BE AT LEAST AS LARGE AS CASING SIZE BEING DRILLED THROUGH.
4. HOLEHOLE ABOVE BOP'S SHALL BE SAME SIZE AS LAST CASING SET.
5. UPPER KILLY COCK IS REQUIRED AND SHALL BE 3000 PSI W.P. MINIMUM.
6. T. I. W. OR COMPAREBLE SAFETY VALVE SHALL BE AVAILABLE ON RIG FLOOR WITH CONNECTION OR SUBS TO FIT ANY TOOL JOINT IN THE STRING. VALVE TO BE FULL BORE 5000 PSI MIN.
7. VALVE NEXT TO SPOOL SHALL BE 4". OTHER EQUIPMENT MAY BE 3" OR 4". ALL CHOKES MANIFOLD EQUIPMENT SHALL BE BURNED. BLOW LINE FROM MANIFOLD TO BE MINIMUM OF 3" AND STRAIGHT AS POSSIBLE WITH MINIMUM BENDS.
8. FLUID LINES FROM ACCUMULATOR TO BOP'S AND ALL REMOTE CONTROL FLUID LINES SHALL BE STEEL, AND RATED AT OR ABOVE MAXIMUM ACCUMULATOR PRESSURE. LINES SHALL BE POSTED IN BUNDLES AND ADEQUATELY PROTECTED FROM DAMAGE.
9. USE R/V'S IN FOLLOWING POSITIONS:*


	<u>DRILLING</u>	<u>RUNNING CASING</u>
UPPER R/V	DRILL PIPE	CASING
LOWER R/V	BLIND	BLIND

*AMOCO AREA SUPT. MAY REVERSE LOCATION OF R/V'S.

10. CHOKES MANIFOLD, BEYOND SECOND VALVE FROM CROSS MAY BE OPTIONALLY POSITIONED OUTSIDE OF SUBSTRUCTURE.
11. EXTENSIONS AND HAND WHEELS TO BE INSTALLED AND PLACED AT ALL TIMES.
12. TWO INCH (2") LINES AND VALVES ARE PERMITTED ON THE KILL LINE.

NOTE: ALL UNMARKED VALVES MAY BE PLUG OR GATE VALVE, INSTAL TO METAL SEAL.

ILLEGIBLE

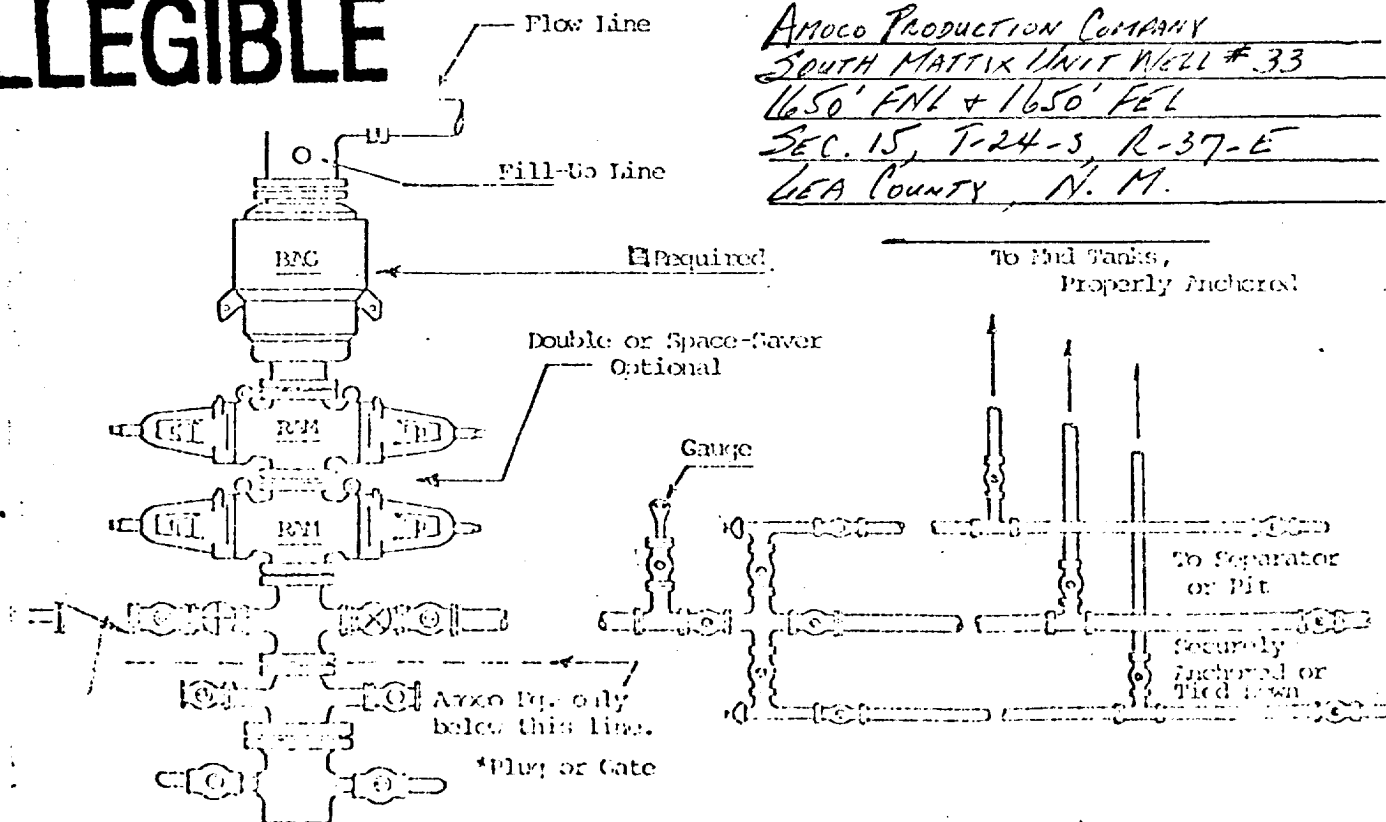

AMOCO PRODUCTION COMPANY
SOUTH MATTHEW UNIT WELL #33
1650' FNL + 1650' FEL
SEC. 15, T-24-S, R-37-E
LEA COUNTY, N. M.