


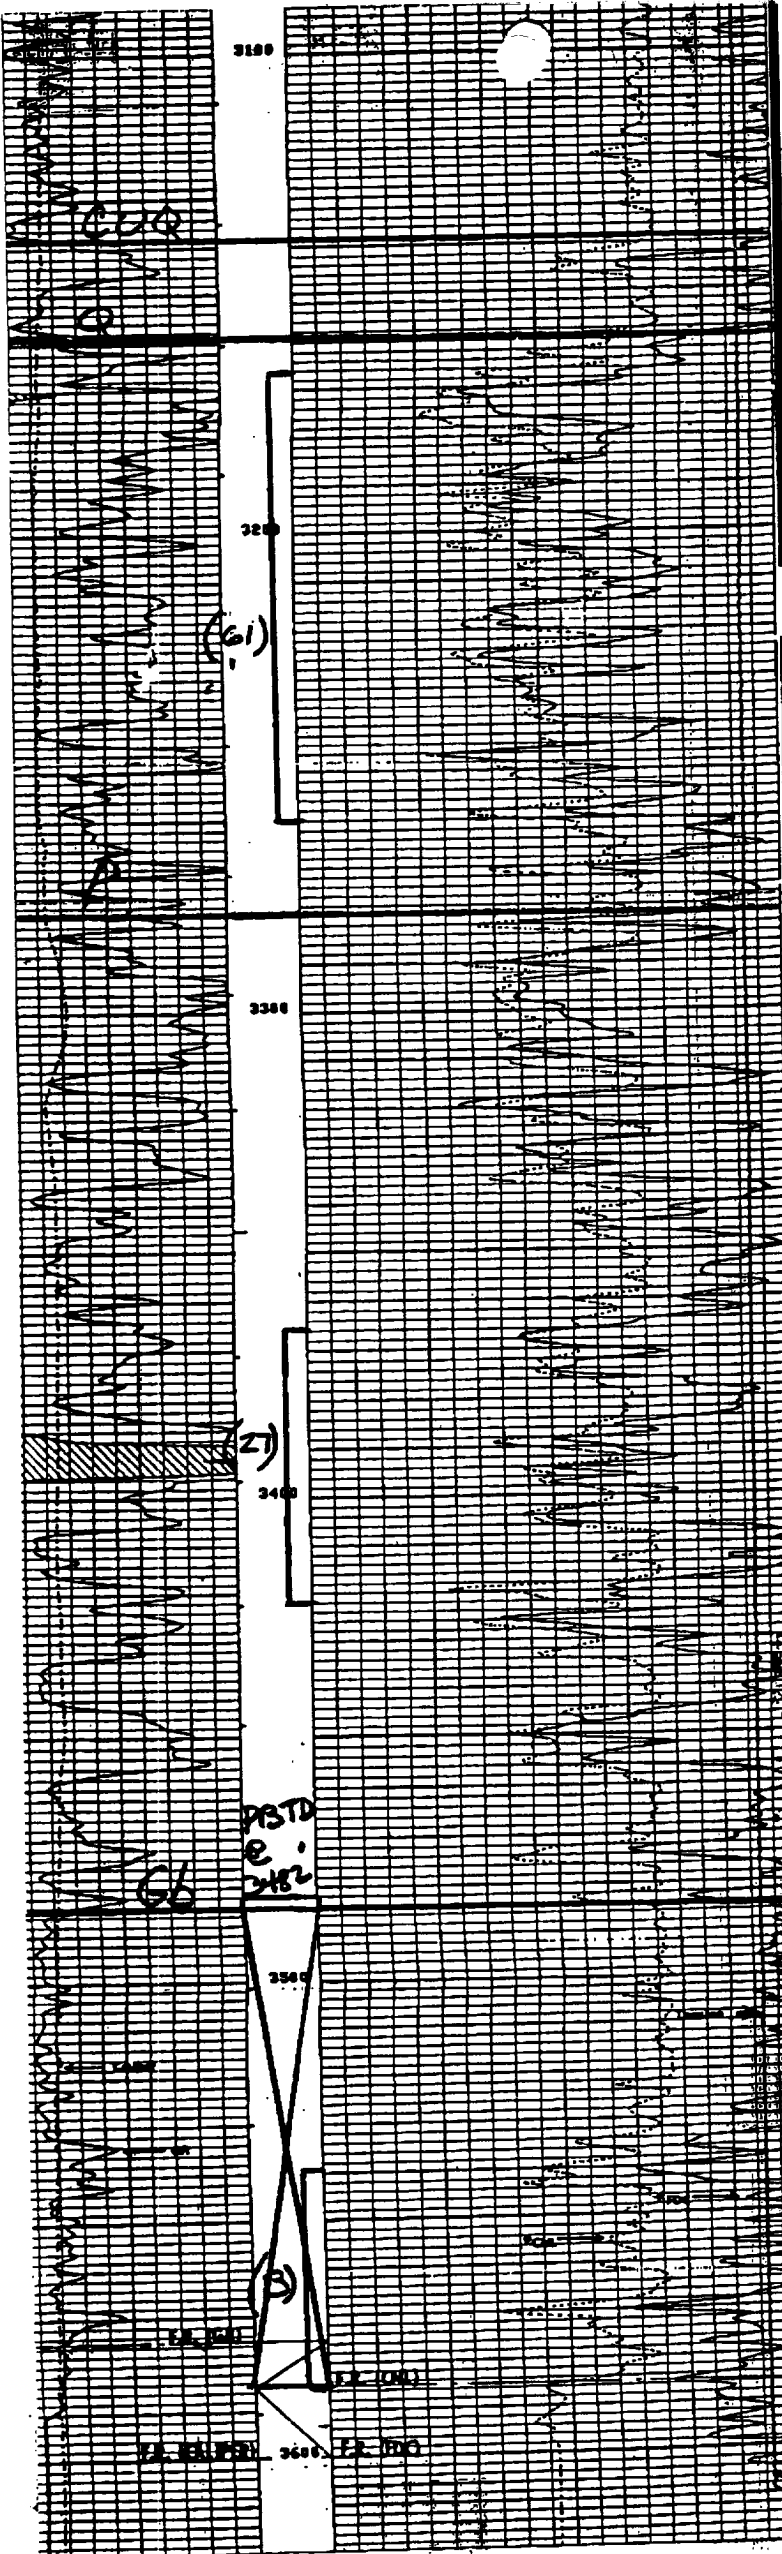

COMPANY Doyle Hartman
(Exxon/Hendrix)
WELL New Mexico State "AB" No. 5
FIELD Langley Mattix
LOCATION 1800' FNL & 600' FEL CH
Sec. 16, T. 24-S, R. 37-E
COUNTY Lea
STATE New Mexico
ELEVATIONS: KB 3201'
DF _____
GL 3269'

COMPLETION RECORD

SPUD DATE 3-16-79 COMP. DATE 4-10-79
TD 3600' PBTD 3595'

CASING RECORD:
8 5/8", 24 # @ 1105' w/ 500 (TOC @ Circ)
5", 15-18 # @ 3599' w/ 1000 (TOC @ Circ)
(TOC @ _____)
(TOC @ _____)

COMP. INTERVAL 3166-3260 (G1) : 3366-3422 (27)
3539-3586 (13) [Total 101]

STIMULATION A/7250 (Qn-Pen-G6)
SF/58,800 (Qn-Pen)

POT. F/997 MCFPD (Source C-105)

GOR _____ GR _____
TP 100 CP PKR @ 2988
CHOKE 1/2" TUBING 2 7/8" @ 2988

REMARKS 4/79:

Perf @ 3166-3260 w/ G1 (Upper Qn)
A/3500 15% NEFE + 80 balls (BC)
(balled out)
SF/25,000 + 42,800 (20/40)

Perf @ 3366-3422 w/ 27 (Penrose)
A/2100 15% NEFE + 50 balls
(balled out)
SF/9450 + 16,000 (20/40)

Perf @ 3539-3586 w/ 13 (G6)
A/250 15% NEFE
A/500 15% NEFE
A/1500 15% NEFE/ASP 600

8/00:
Set retainer at 3455'
Sq'd perfs, from 3539'
to 3586', with 200 sx.
Drilled out cement to
3482'. Returned to
production from 3166' to 3422'.