
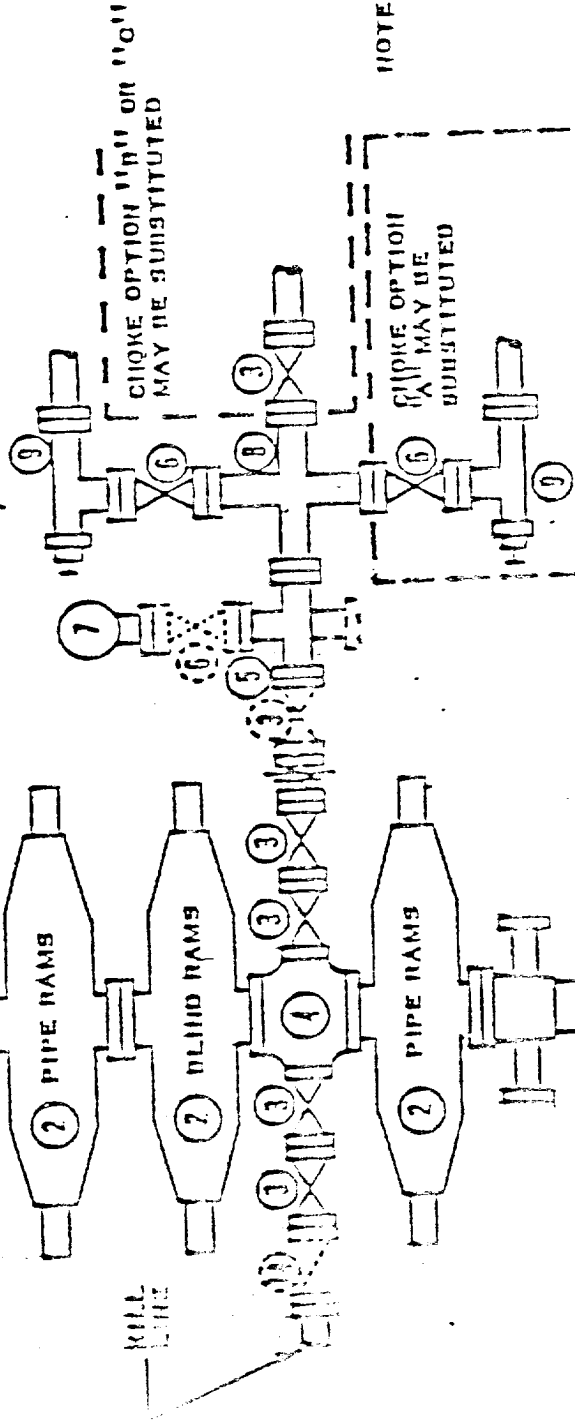
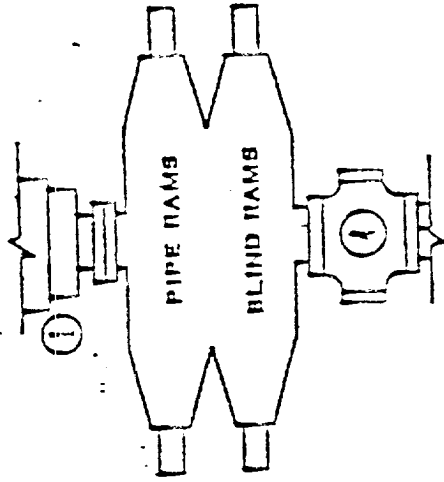



DOUBLE PREVENTER OPTION

----- OPTIONAL EQUIPMENT

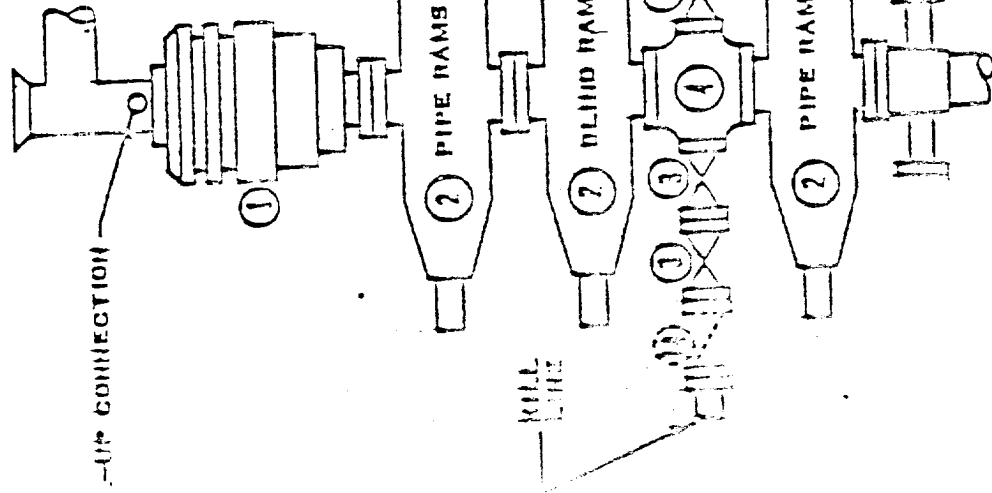

NOTES

1. 5000 PSI WP OR BETTER CLAMP NUTS MAY BE SUBSTITUTED FOR FLANGES
2. ONE ADJUSTABLE CHOKE MAY BE REPLACED WITH A POSITIVE CHOKE
3. VALVES MAY BE EITHER HAND OR POWER OPERATED BUT, IF POWER OPERATED THE VALVES FLANGED TO THE WORK RUM MUST BE CAPABLE OF BEING OPENED AND CLOSED MANUALLY OR CLOSE ON POWER FAILURE AND BE CAPABLE OF BEING OPENED MANUALLY

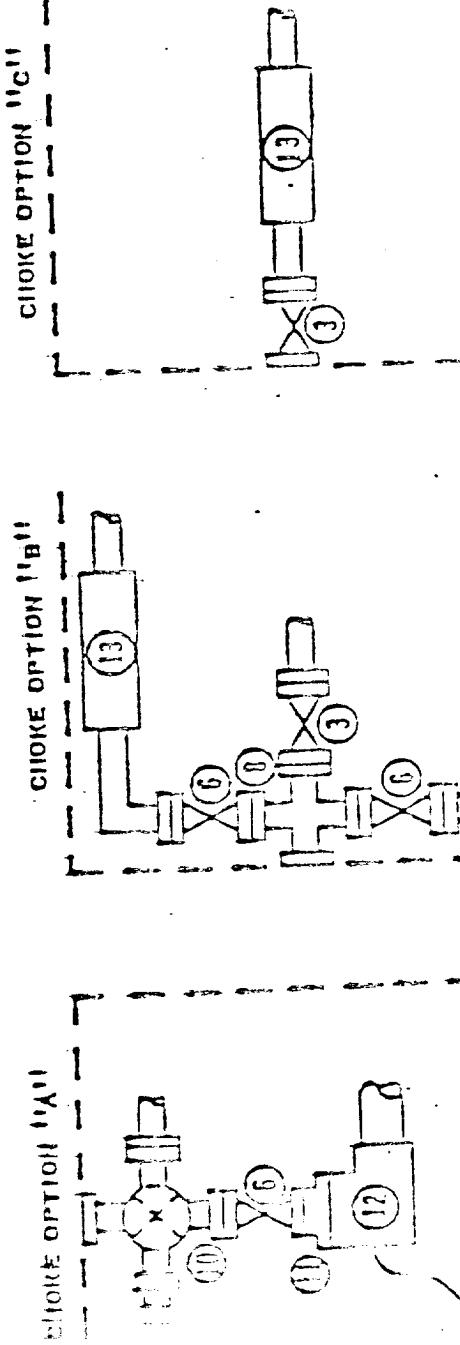

5000 PSI WORKING PRESSURE
BLOWOUT PREVENTER HOOD
(SERIES 1500 FLANGES OR BE

1. 1500 PSI WP OR BETTER CLAMP NUTS MAY BE SUBSTITUTED FOR FLANGES
2. ONE ADJUSTABLE CHOKE MAY BE REPLACED WITH A POSITIVE CHOKE
3. VALVES MAY BE EITHER HAND OR POWER OPERATED BUT, IF POWER OPERATED THE VALVES FLANGED TO THE WORK RUM MUST BE CAPABLE OF BEING OPENED AND CLOSED MANUALLY OR CLOSE ON POWER FAILURE AND BE CAPABLE OF BEING OPENED MANUALLY
4. 1500 PSI WP OR BETTER CLAMP NUTS MAY BE SUBSTITUTED FOR FLANGES
5. ONE ADJUSTABLE CHOKE MAY BE REPLACED WITH A POSITIVE CHOKE
6. VALVES MAY BE EITHER HAND OR POWER OPERATED BUT, IF POWER OPERATED THE VALVES FLANGED TO THE WORK RUM MUST BE CAPABLE OF BEING OPENED AND CLOSED MANUALLY OR CLOSE ON POWER FAILURE AND BE CAPABLE OF BEING OPENED MANUALLY
7. 1500 PSI WP OR BETTER CLAMP NUTS MAY BE SUBSTITUTED FOR FLANGES
8. ONE ADJUSTABLE CHOKE MAY BE REPLACED WITH A POSITIVE CHOKE
9. VALVES MAY BE EITHER HAND OR POWER OPERATED BUT, IF POWER OPERATED THE VALVES FLANGED TO THE WORK RUM MUST BE CAPABLE OF BEING OPENED AND CLOSED MANUALLY OR CLOSE ON POWER FAILURE AND BE CAPABLE OF BEING OPENED MANUALLY
10. 1500 PSI WP OR BETTER CLAMP NUTS MAY BE SUBSTITUTED FOR FLANGES
11. ONE ADJUSTABLE CHOKE MAY BE REPLACED WITH A POSITIVE CHOKE
12. VALVES MAY BE EITHER HAND OR POWER OPERATED BUT, IF POWER OPERATED THE VALVES FLANGED TO THE WORK RUM MUST BE CAPABLE OF BEING OPENED AND CLOSED MANUALLY OR CLOSE ON POWER FAILURE AND BE CAPABLE OF BEING OPENED MANUALLY
13. 1500 PSI WP OR BETTER CLAMP NUTS MAY BE SUBSTITUTED FOR FLANGES
14. ONE ADJUSTABLE CHOKE MAY BE REPLACED WITH A POSITIVE CHOKE

RECEIVED

JUN 21 1982

O.C.B.
HOBBS OFFICE