



DOUBLE PREVENTER OPTION

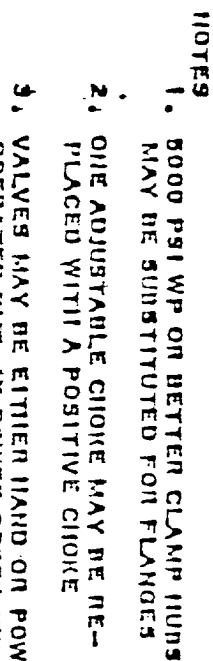

- 1 BEN, 1500 HYDRAUL OR
- 2 BEN, 1500 RAM-TYPE POP (8)
- 3 3" BEN, 1500 VALVE
- 4 BEN, 1500 DRILLING SPOOL
- 5 3" BEN, 1500 X 2" BEN, 1500
STEEL TEE
- 6 2" BEN, 1500 VALVE
- 7 2" MUD PRESSURE GUAGE
- 8 3" BEN, 1500 X 2" BEN, 1500
STEEL CROSS
- 9 2" BEN, 1500 ADJ. CHIOKE
- 10 2" BEN, 1500 ADJ. CHIOKE OR 2" BEN,
1500 HIBEN VALVE OR
SIDE OUTLET OF 2" BEN, 1500
STEEL TEE
- 11 ADAPTER, 2" BEN, 1500 X 10,000 L
FLANGE MATING ¹² INLET
- 12 10,000 LB WP REMOTE CHIOKE
- 13 HYDRAULIC CHIOKE, 2500 LB WP
OR BETTER
- 14 3" BEN, 1500 CHECK VALVE

VALVE MAY BE EITHER HAND OR POWER OPERATED BUT, IF POWER OPERATED, THE VALVE FLANGED TO THE HOT END MUST BE CAPABLE OF BEING OPENED AND CLOSED MANUALLY ON CLOSE ON POWER FAILURE AND BE CAPABLE OF BEING OPENED MANUALLY

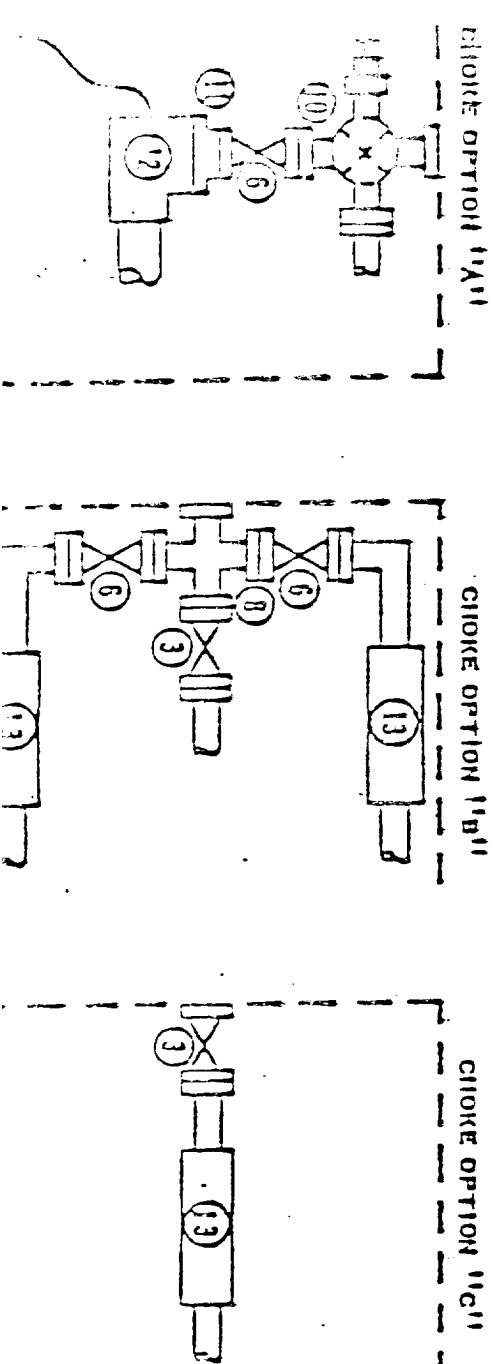

5000 PSI WORKING PRESSURE
BLOWOUT PREVENTER 11001-
(SERIES 1500 FLANGES OR BET

RECEIVED

JUN 21 1982

C.C.D.
HOBBBS OFFICE