


..... OPTIONAL EQUIPMENT

DOUBLE PREVENTER OPTION

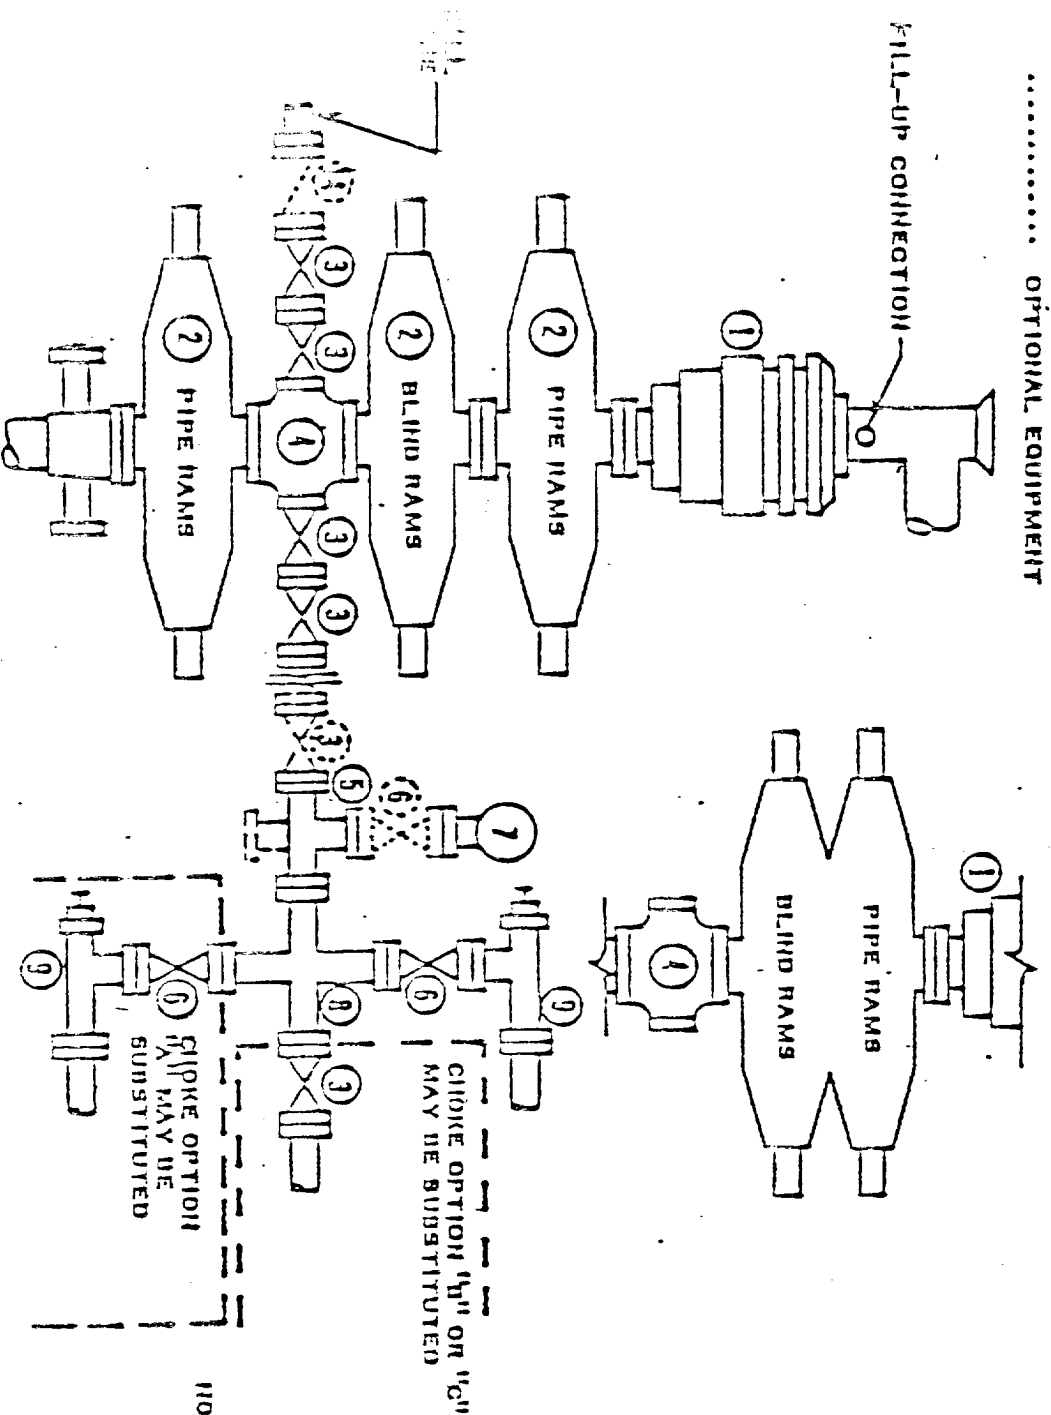

CHOKES OPTION 1/4" OR 1/2" MAY BE SUBSTITUTED

CHOKES OPTION 1/4" MAY BE SUBSTITUTED

NOTES:

1. 10,000 PSI WP OR BETTER CLAMP (HUBS MAY BE SUBSTITUTED FOR FLANGES)
2. ONE ADJUSTABLE CHOKES MAY BE REPLACED WITH A POSITIVE CHOKES
3. VALVES MAY BE EITHER HAND OR POWER OPERATED BUT, IF POWER OPERATED, THE VALVES FLANGED TO THE BOP MUST BE CAPABLE OF BEING OPENED AND CLOSED MANUALLY OR CLOSE ON POWER FAILURE AND BE CAPABLE OF BEING OPERATED MANUALLY

10,000 PSI WORKING PRESSURE BLOWOUT PREVENTER HOOK-

FLANGES OR BETTER)

① HYDRAULIC 10,000 LB WP 6 BX (9)

② RAM-TYPE BOP, 10,000 LB WP 6 BX

③ 3 1/16" 10,000 LB WP 6 BX VALVE

④ DRILLING SPOOL, 10,000 LB WP 6 BX

⑤ STEEL TEE, 3 1/16" X 2 1/16" 10,000 LB WP 6 BX

⑥ 2 1/16" 10,000 LB WP 6 BX VALVE

⑦ MUD PRESSURE GAUGE

⑧ STEEL CHOSE, 3 1/16 X 2 1/16 10,000 LB WP 6 BX

⑨ ADJ. CHOKES 2 1/16" 10,000 LB WP

⑩ 2 1/16 ADJ. CHOKES ON 2 1/16 RISE VALVE ON SIDE OUTLET OF 2 1/16 STEEL TEE, ALL 10,000 LB 6 BX

⑪ ADAPTER 2 1/16 X FLANGE MATING INLET OF ⑫ 10,000 LB WP 6 BX

⑫ 10,000 LB WP REMOTE CHOKES

⑬ HYDRAULIC CHOKES, 2500 LB WP-ON BETTER

⑭ CHECK VALVE, 3 1/16" 10,000 LB WP 6 BX

RECEIVED

JUN 21 1982

U.S. DEPT. OF JUSTICE
HONORARY CLERK