

N.M. OIL COM. COMMISSION
P.O. BOX 1980
HOBBS, NEW MEXICO 88240

SUBMIT IN TRIPLICATE*
(Other instructions on
reverse side)

FORM APPROVED
OMB NO. 1004-0136
Expires: February 28, 1995

DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR DEEPEN

1a. TYPE OF WORK

DRILL ☒

DEEPEN ☐

b. TYPE OF WELL

OIL
WELL ☒

GAS
WELL ☐

OTHER

SINGLE
ZONE ☒

MULTIPLE
ZONE ☐

2. NAME OF OPERATOR

Enron Oil & Gas Company

3. ADDRESS AND TELEPHONE NO.

P. O. Box 2267, Midland, Texas 79702

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.)*
At surface

1980' FSL & 510' FEL

At proposed prod. zone

1980' FSL & 510' FEL

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE*

30 miles west from Jal

15. DISTANCE FROM PROPOSED*

LOCATION TO NEAREST
PROPERTY OR LEASE LINE, FT. 510

(Also to nearest drig. unit line, if any) 510

16. NO. OF ACRES IN LEASE

640

17. DISTANCE FROM PROPOSED LOCATION*
TO NEAREST WELL, DRILLING, COMPLETED,
OR APPLIED FOR, ON THIS LEASE, FT.

1320' to #1

19. PROPOSED DEPTH

12600

17. NO. OF ACRES ASSIGNED
TO THIS WELL

80

20. ROTARY OR CABLE TOOLS

Rotary

21. ELEVATIONS (Show whether DF, RT, GR, etc.)

3376' GR

22. APPROX. DATE WORK WILL START*

January 1995

23. PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	GRADE, SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
14-3/4	11-3/4 H-40 A	ST&C 42	650	250 sx Circulated
11	8-5/8 J-55	ST&C 32	5200	1100 sx Circulated <i>SEE</i>
7-7/8	5-1/2 P-110	LT&C 17	6500	1200 sx <i>STIPS.</i>
	5-1/2 S-95	LT&C 17	12600	TOC est at 4500'

The undersigned accepts all applicable terms, conditions, stipulations, and restrictions concerning operations conducted on leased land or portions thereof as shown below:

NM 30400

Sec 11, T25S, R33E

Bone Spring Formation

Federal Bond is MT0748 with endorsement to New Mexico.

**Approved Subject to
General Requirements and
Special Stipulations
Attached**

Acreage is dedicated to a pipeline.

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout prevention program, if any.

24

SIGNED

Betty Gildon
Betty Gildon

TITLE Regulatory Analyst

DATE 12/12/94

(This space for Federal or State office use)

PERMIT NO.

APPROVAL DATE

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
CONDITIONS OF APPROVAL, IF ANY:

APPROVED BY

For [Signature]

TITLE

For [Signature]

DATE

1-11-95

*See Instructions On Reverse Side

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false or fraudulent statement or representation as to any matter within its jurisdiction.

RECEIVED

JAN 12 1995

ROD HOBBS
OFFICE

District I
PO Box 1980, Hobbs, NM 88241-1980
District II
PO Drawer DD, Artesia, NM 88211-0719
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
PO Box 2088, Santa Fe, NM 87504-2088

State of New Mexico
Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION
PO Box 2088
Santa Fe, NM 87504-2088

Form C-102
Revised February 21, 1994
Instructions on back
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-025-32822	² Pool Code 51020	³ Pool Name Red Hills Bone Spring
⁴ Property Code 15413	⁵ Property Name HALLWOOD "11" FEDERAL	⁶ Well Number 2
⁷ OGRID No. 7377	⁸ Operator Name ENRON OIL AND GAS COMPANY	⁹ Elevation 3376

¹⁰Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
1	11	25-S	33-E		1980	SOUTH	510	EAST	LEA

¹¹Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County

¹² Dedicated Acres 80	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.
-------------------------------------	-------------------------------	----------------------------------	-------------------------

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

¹⁶					<div><p>¹⁷ OPERATOR CERTIFICATION</p><p>I hereby certify that the information contained hereto is true and complete to the best of my knowledge and belief.</p><p><i>Betty Gildon</i></p><p>Signature Betty Gildon</p><p>Printed Name Regulatory Analyst</p><p>Title</p><p>11/22/94</p><p>Date</p></div>
					<div><p>¹⁸ SURVEYOR CERTIFICATION</p><p>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to best of my belief.</p><p>10-25-94</p><p>Date of Survey</p><p>Signature and Seal of Professional Surveyor</p><p><i>Earl Foote</i></p><p>Certificate Number 8278</p></div>

510'

1980'

EARL FOOTE
NEW MEXICO
REGISTERED PROFESSIONAL LAND SURVEYOR
8278

DRILLING PROGRAM

Enron Oil & Gas Company
Hallwood "11" Federal, Well No. 2
1980' FSL & 510' FEL
Sec. 11, T25S, R33E
Lea County, New Mexico

1. Geologic Name of Surface Formation:

Permian

2. Estimated Tops of Important Geologic Markers:

Rustler	850'
Delaware Mt. Group	5175'
Bone Spring Lime	9275'
Bone Spring Pay	12225'
TD	12600'

3. Estimated Depths of Anticipated Fresh Water, Oil or Gas:

Upper Permian Sands	100'	Fresh Water
3rd Bone Spring Sand	12225'	Oil

No other formations are expected to give up oil, gas or fresh water in measurable quantities. The surface fresh water sands will be protected by setting 11-3/4" casing at 650' and circulating cement back to surface, and 8-5/8" casing will be set at 5200' with cement circulated back to surface.

Enron Oil & Gas Company
Hallwood "11" Federal, Well No. 2
1980' FSL & 510' FEL
Sec. 11, T25S, R33E
Lea County, New Mexico

4. Casing Program:

<u>Hole Size</u>	<u>Interval</u>	<u>OD csg</u>	<u>Weight Grade Jt. Cond. Type</u>
14-3/4	0- 650'	11-3/4	42# H-40 A ST&C
11	0- 5200'	8-5/8	24# & 32# J-55 ST&C
7-7/8	0- 6500'	5-1/2	17# P-110 LT&C
	6500-12600'	5-1/2	17# S-95 LT&C

Cementing Program:

- 11-3/4" Surface casing: Cement to surface with 250 sx of Class C + 2% CaCl₂ + 1/4#/sx flocele.
- 8-5/8" Intermediate: Cement to surface with 800 sx of Premium Plus lite + 15#/sx salt + 1/4#/sx Flocele and 300 sx Cl C + 2% CaCl₂
- 5-1/2" Prod. Casing: Cement with 1200 sx 50/50 Cl H/Poz + 2% Gel + .4% CF-14, .1% Diacel LWL. This cement slurry is designed to bring TOC to 4500'.

5. Minimum Specifications for Pressure Control:

The blowout preventer equipment (BOP) shown in Exhibit #1 will consist of a double ram-type (5000 psi WP) preventer and an annular preventer (5000 psi WP). Units will be hydraulically operated and the ram-type will be equipped with blind rams on top and drill pipe rams on bottom. All will be installed on the 11-3/4" surface casing and used continuously until TD is reached. All BOP's and accessory equipment will be tested to 600 psi before drilling out of surface casing. Before drilling out of intermediate casing, the ram-type BOP and accessory equipment will be tested to 5000 psi and the annular to 70% of rated working pressure (3500 psi).

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. A 2" kill line and 4" choke line will be included in the drilling spool located below the ram-type BOP. Other accessories to the BOP equipment will include a kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold with 3000 psi WP rating.

RECEIVED

JAN 12 1995

OCD HOBBS
OFFICE

ENRON OIL & GAS COMPANY

Hallwood 11 Federal #2

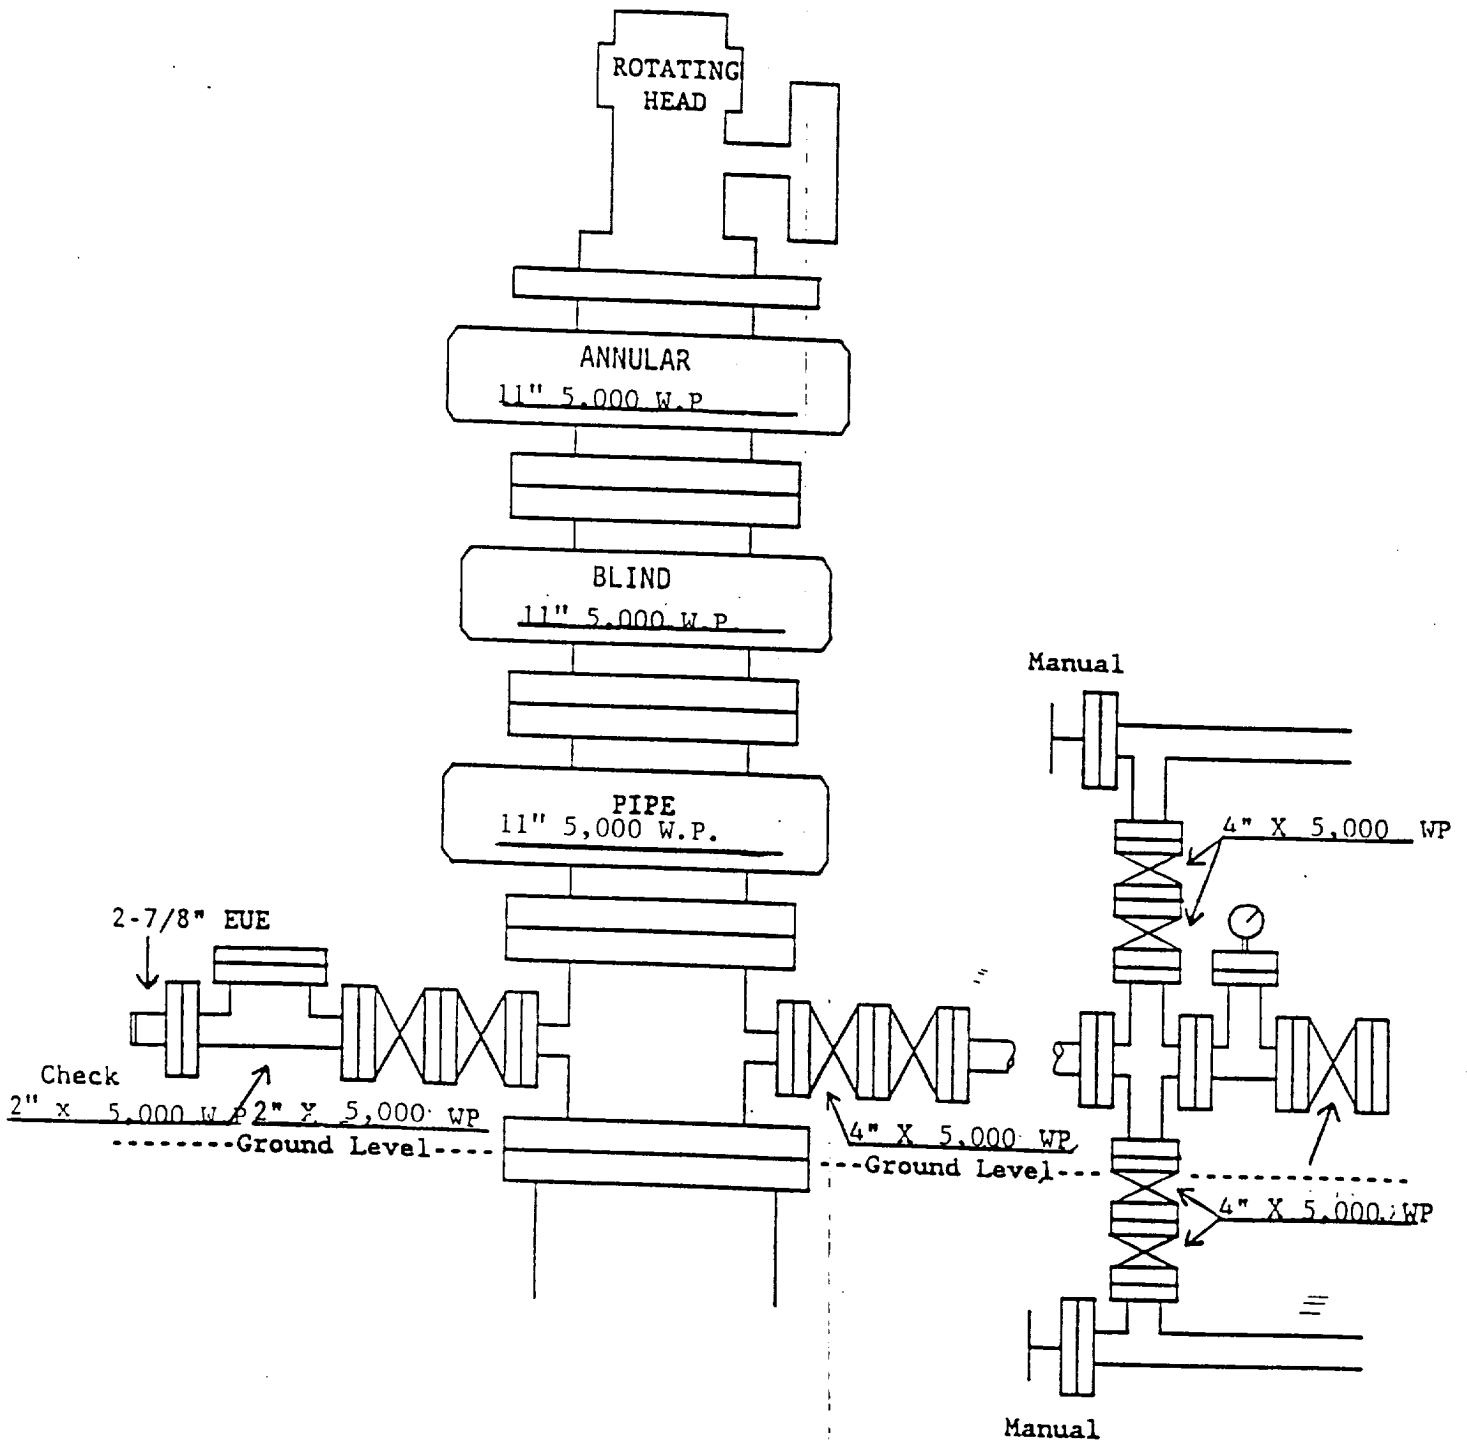


Exhibit #1