

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR DEEPEN

1a. TYPE OF WORK DRILL <input checked="" type="checkbox"/> DEEPEN <input type="checkbox"/>			5. LEASE DESIGNATION AND SERIAL NO. NM-2379		
b. TYPE OF WELL OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <input type="checkbox"/>			6. IF INDIAN, ALLOTTEE OR TRIBE NAME		
2. NAME OF OPERATOR POGO PRODUCING COMPANY			7. UNIT AGREEMENT NAME		
3. ADDRESS AND TELEPHONE NO. P. O. BOX 10340, MIDLAND, TEXAS 79702			8. FARM OR LEASE NAME, WELL NO. COVINGTON "A" FEDERAL #24		
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.)* At surface 1650' FNL AND 2310' FEL OF SECTION 26 At proposed prod. zone			9. API WELL NO.		
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE* 29 MILES WEST OF EUNICE, NEW MEXICO			10. FIELD AND POOL, OR WILDCAT RED TANK BONE SPRINGS		
15. DISTANCE FROM PROPOSED* LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. (Also to nearest drlg. unit line, if any) 331			11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA SEC. 26, T. 22 S., R. 32 E.		
16. NO. OF ACRES IN LEASE 1280			12. COUNTY OR PARISH LEA COUNTY		
17. NO. OF ACRES ASSIGNED TO THIS WELL 40			13. STATE NEW MEXICO		
18. DISTANCE FROM PROPOSED LOCATION* TO NEAREST WELL, DRILLING, COMPLETED, OR APPLIED FOR, ON THIS LEASE, FT. 1320'			20. ROTARY OR CABLE TOOLS ROTARY		
21. ELEVATIONS (Show whether DF, RT, GR, etc.) 3727' GR			22. APPROX. DATE WORK WILL START* UPON APPROVAL		


PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	GRADE, SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
17-1/2"	13-3/8"	54.5#	800'	SUFFICIENT TO CIRCULATE
11"	8-5/8"	32#	4600'	SUFFICIENT TO CIRCULATE
7-7/8"	5-1/2"	17#	10,100'	TO TIE BACK 200' INTO 8-5/8"

AFTER SETTING PRODUCTION CASING, PAY ZONE WILL BE PERFORATED  
AND STIMULATED AS NECESSARY.

SEE ATTACHED FOR: SUPPLEMENTAL DRILLING DATA  
BOP SKETCH  
SURFACE USE AND OPERATIONS PLAN  
HYDROGEN SULFIDE DRILLING OPERATIONS PLAN

OPER. OGRID NO. 17891  
PROPERTY NO. 9316  
POOL CODE 51483  
EFF. DATE 3/30/95  
API NO. 30-025-32903

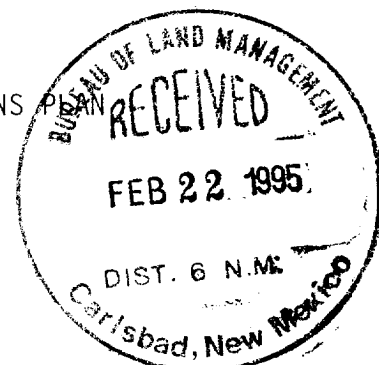

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24. SIGNED Richard L. Wright TITLE Division Operations Mgr. DATE February 17, 1995  
(This space for Federal or State office use)

PERMIT NO. \_\_\_\_\_ APPROVAL DATE \_\_\_\_\_  
Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.  
CONDITIONS OF APPROVAL, IF ANY:

APPROVED BY Joe G. LARA TITLE Acting AREA MANAGER DATE 3-27-95

\*See Instructions On Reverse Side

RECEIVED  
FEB 2 1966  
U.S. DEPARTMENT OF  
COMMERCE  
WASHINGTON, D.C.

RECEIVED

FEB 2 1966  
U.S. DEPARTMENT OF  
COMMERCE  
OFFICE

DISTRICT I  
P.O. Box 1980, Hobbs, NM 88240

State of New Mexico  
Energy, Minerals and Natural Resources Department

Form C-102  
Revised February 10, 1994  
Instruction on back  
Submit to Appropriate District Office  
State Lease - 4 Copies  
Fee Lease - 3 Copies

DISTRICT II  
P.O. Drawer DD, Artesia, NM 88210

DISTRICT III  
1000 Rio Brazos Rd., Aztec, NM 87410

OIL CONSERVATION DIVISION

P.O. Box 2088  
Santa Fe, New Mexico 87504-2088

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number 30-085-32905	Pool Code 51683	Pool Name RED TANK BONE SPRINGS
Property Code 9316	Property Name COVINGTON "A" FEDERAL	Well Number 24
OGRID No. 17891	Operator Name POGO PRODUCING COMPANY	Elevation 3727

Surface Location

UL or lot No.	Section	Township	Range	Lot Idn.	Feet from the	North/South line	Feet from the	East/West line	County
G	26	22 S	32 E		1650	NORTH	2310	EAST	LEA


Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn.	Feet from the	North/South line	Feet from the	East/West line	County
Dedicated Acres 40	Joint or Infill N	Consolidation Code	Order No.						

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED  
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

	<p><b>OPERATOR CERTIFICATION</b></p> <p>I hereby certify the the information contained herein is true and complete to the best of my knowledge and belief.</p> <p><i>Richard L. Wright</i> Signature</p> <p>Richard L. Wright Printed Name</p> <p>Division Operations Mgr. Title</p> <p>January 25, 1995 Date</p> <p><b>SURVEYOR CERTIFICATION</b></p> <p>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision and that the same is true and correct to the best of my belief.</p> <p>JANUARY 26 1995 Date Surveyed</p> <p>Seal of Professional Surveyor No. 33299 <i>Ronald J. Eidson</i></p> <p>WFO No. 95-11-0085 JLP Certified by R. J. Eidson, WEST, 676 RONALD J. EIDSON, 3249</p>
--	--

POGO PRODUCING COMPANY  
COVINGTON "A" FEDERAL WELL NO.24

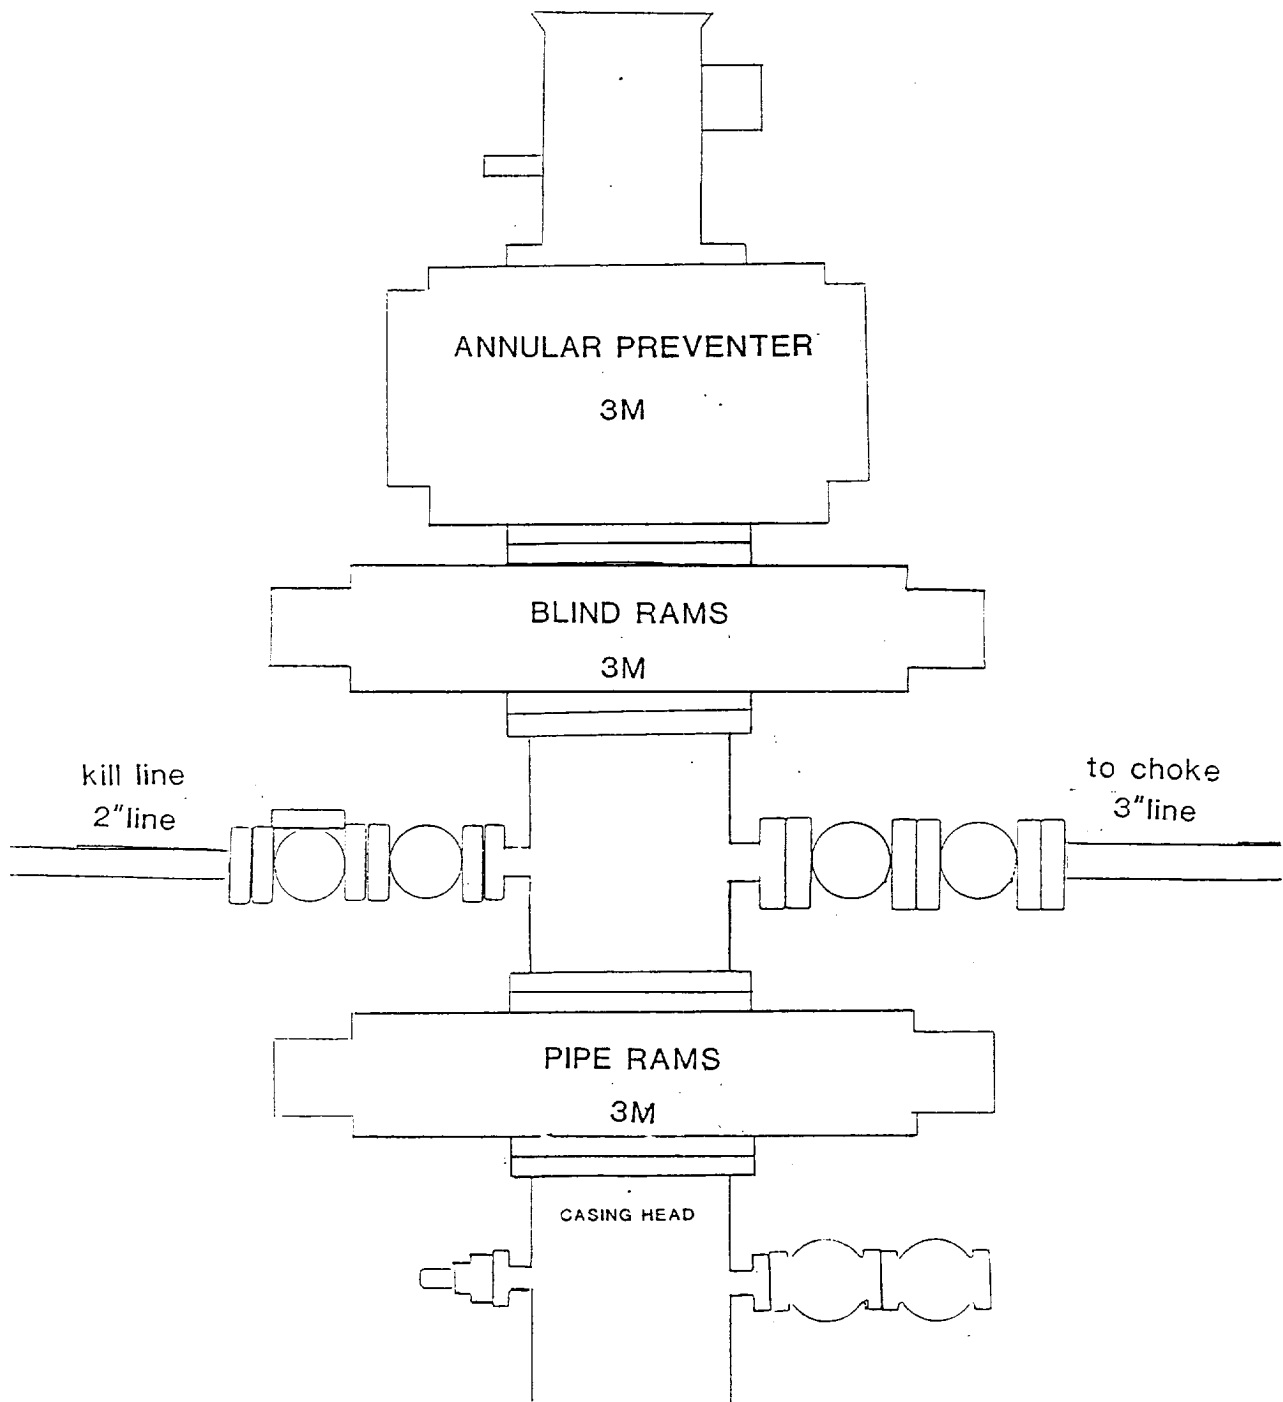

SUPPLEMENTAL DRILLING DATA  
POGO PRODUCING COMPANY  
COVINGTON "A" FEDERAL WELL NO.24

1. SURFACE FORMATION: Quaternary.
2. ESTIMATED TOPS OF GEOLOGIC MARKERS:

Anhydrite	850'
Delaware Lime	4800'
Cherry Canyon	6100'
Brushy Canyon	7400'
Bone Springs	8800'

3. ANTICIPATED POSSIBLE HYDROCARBON BEARING ZONES:

Delaware	Oil
Bone Springs	Oil

4. PROPOSED CASING AND CEMENTING PROGRAM:

CASING SIZE	SETTING DEPTH		WEIGHT	GRADE	JOINT
	FROM	TO			
13-3/8"	0	800'	54.5#	J-55	STC
8-5/8"	0	4300'	32#	J-55	STC
"	4300'	4600'	32#	S-80	STC
5-1/2"	0	1000'	17#	N-80	LTC
"	1000'	7000'	17#	J-55	LTC
"	7000'	10,100'	17#	N-80	LTC
MINIMUM					
DESIGN FACTORS: COLLAPSE <u>1.1</u> BURST <u>1.1</u> TENSION <u>1.2</u>					

13-3/8" casing to be cemented with 500 sacks of light cement tailed in with 200 sacks of Class "C" with 2% CaCl. Cement to circulate.

8-5/8" casing to be cemented with 1200 sacks of light cement with 10% salt tailed in with 200 sacks of premium cement with 1% CaCl. Cement to circulate.

5-1/2" production casing is to be cemented with approximately 700 sacks

**RECEIVED**

APR 11 1965  
FEDERAL BUREAU OF INVESTIGATION  
OFFICE

of light cement followed by 400 sacks of premium cement. Cement to tie back 200 feet into the 8-5/8" casing.

If, during drilling operations, need for stage cementing of casing is indicated, staging tool(s) will be run and positioned to best suit hole conditions at time casing is run.

Cement volumes may be adjusted and cement may have lost circulation and/or other additives depending on hole conditions at the time casing is run.

#### 5. PRESSURE CONTROL EQUIPMENT:

Blowout prevention equipment, while drilling the 11" hole, will be either a 3000 psi working pressure double ram type preventer or a 3000 psi working pressure annular type preventer.

Blow out prevention equipment, while drilling below the 8-5/8" casing seat, will be a 3000 psi working pressure BOP stack. A BOP sketch is attached.

#### 6. CIRCULATING MEDIUM:

Surface to 800 feet: Fresh water base fluid with gel and paper sweeps for hole cleaning.  
Mud wgt 8.4 ppg - 8.6 ppg  
Viscosity 28 - 32 seconds per quart.

800 feet to 4600 feet: Brine water base fluid with salt gel and paper sweeps for hole cleaning.  
Mud wgt 10.0 ppg - 10.2 ppg  
Viscosity 28 - 32 seconds per quart.

4600 feet to T.D.: Fresh water base fluid with gel and paper sweeps for hole cleaning.  
Mud wgt 8.4 ppg - 8.6 ppg  
Viscosity 28 - 32 seconds per quart.

#### 7. AUXILIARY EQUIPMENT:

A mud logging trailer will be in use while drilling below the interdediate casing.

8. TESTING, LOGGING, AND CORING PROGRAM:

Drill stem tests will be made when well data indicate a test is warranted.

It is planned that electric logs will include GR-CNL-Density logs and GR-DLL logs.

No coring is planned.

9. ABNORMAL PRESSURES, TEMPERATURES, OR HYDROGEN SULFIDE GAS:

No abnormal pressures or temperatures are expected.

Expected bottom hole pressure is about 3900 psi.

Expected bottom hole temperature is about 135 degrees Fahr.

No hydrogen sulfide gas is expected. The production stream of Pogo Producing Company's wells in this area have been tested specifically for hydrogen sulfide gas and test results were negative. However, since it is possible that low-volume hydrogen sulfide gas may be present in permeable water zones of the Castile formation, drilling operations below the surface casing will be in accordance with the attached "HYDROGEN SULFIDE DRILLING OPERATIONS PLAN" until intermediate casing is set and cemented and this possible source of hydrogen sulfide gas is cased off.

10. ANTICIPATED STARTING DATE:

It is planned that operations will commence upon approval of this application, with drilling and completion operations lasting about 30 days.



**RECEIVED**

MAY 24 1965

WILSON  
OFFICE