

OPER. OGRID NO. 7327
PROPERTY NO. 20457

FORM APPROVED
OMB NO. 1004-0136
Expires: February 23, 1995

UNIT ✓
DEPARTMENT ✓ POOL CODE ✓
BUREAU OF LAND MANAGEMENT
EXP. DATE 2/21/97

APPLICATION FOR PERMIT APINO. 3D-D-25-33848

1a. TYPE OF WORK

DRILL ☒

DEEPEN ☐

b. TYPE OF WELL

OIL WELL ☒

GAS WELL ☐

OTHER ☐

SINGLE ZONE ☒

MULTIPLE ZONE ☐

2. NAME OF OPERATOR

ENron Oil & Gas Company

3. ADDRESS AND TELEPHONE NO.

P. O. Box 2267, Midland, Texas 79702 915/686-3714

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.)
At surface

330' FSL & 1650' FWL

At proposed prod. zone

Same

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE*

25 miles West from Jal, NM

15. DISTANCE FROM PROPOSED*

LOCATION TO NEAREST
PROPERTY OR LEASE LINE, FT.
(Also to nearest drlg. unit line, if any)

330

330

16. NO. OF ACRES IN LEASE

640

17. NO. OF ACRES ASSIGNED
TO THIS WELL

80

18. DISTANCE FROM PROPOSED LOCATION*
TO NEAREST WELL, DRILLING, COMPLETED
OR APPLIED FOR, ON THIS LEASE, FT.

1650

19. PROPOSED DEPTH

13000

20. ROTARY OR CABLE TOOLS

Rotary

21. ELEVATIONS (Show whether DF, RT, GR, etc.)

3337' GR

22. APPROX. DATE WORK WILL START*

2/15/97

23. PROPOSED CASING AND CEMENT PROGRAM

SIZE OF HOLE	GRADE, SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
14-3/4	11-3/4 H-40 A	ST&C 42#	650	250 sx CIRCULATED
11	8-5/8 J-55 ST&C	32#	5200	1100 sx CIRCULATED
7-7/8	5-1/2 P-110 LT&C	17#	6500	1200 sx est TOC at 7500'
	5-1/2 S-95 LT&C	17#	6500-13000	

The Undersigned accepts all applicable terms, conditions, stipulations, and restrictions concerning operations conducted on leased land or portions thereof as shown below:


NM NM 92200

Red Hills Bone Spring

Sec 34-25S-34E

Federal Bond # is MT 0748 with
endorsement to New Mexico

APPROVAL SUBJECT TO
GENERAL REQUIREMENTS AND
SPECIAL STIPULATIONS
ATTACHED

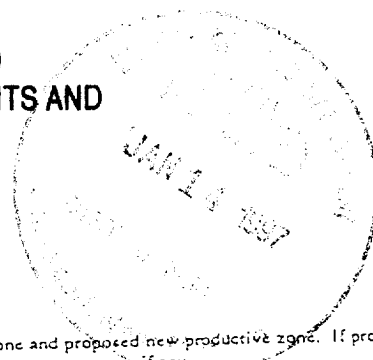

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program if any.

24.

SIGNATURE

Betty Gildon

Betty Gildon

TITLE Regulatory Analyst

DATE

1-13-97

(This space for Federal or State office use)

PERMIT NO.

APPROVAL DATE

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
CONDITIONS OF APPROVAL IF ANY:

(ORIG. SGD.) JAMES G. PETTENGILL

TITLE


ADM. MINERALS

DATE

APPROVED BY

*See Instructions On Reverse Side

I, the undersigned, hereby certify and warrant for any person knowingly and willfully to make to any department or agency of the



District I
PO Box 1980, Hobbs, NM 88241-1980
District II
PO Drawer DD, Artesia, NM 88211-0719
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
PO Box 2088, Santa Fe, NM 87504-2088

State of New Mexico
Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION
PO Box 2088
Santa Fe, NM 87504-2088

Form C-102
Revised February 21, 1994
Instructions on back
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

'API Number 30-025-33848	'Pool Code 51020 ✓	'Pool Name Wildcat Red Hills Bone Spring
'Property Code 20457	'Property Name MITCHELL OLSEN "34" FEDERAL	
'OGRID No. 7377	'Operator Name ENRON OIL & GAS COMPANY	
		'Well Number 3
		'Elevation 3337'

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
N	34	25-S	34-E		330	SOUTH	1650	WEST	LEA


¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County

"Dedicated Acres 40.80	"Joint or Infill	"Consolidation Code	"Order No.
----------------------------------	------------------	---------------------	------------

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

<div>16</div> <p>LAT.=32.044985945 LONG.=103.273786663 Y=394109.623 X=770335.830</p> <p>1650'</p> <p>330'</p>	<div>17 OPERATOR CERTIFICATION</div> <p>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.</p> <p></p> <p>Signature Betty Gildon Printed Name Regulatory Analyst Title 1/10/97 Date</p>	
	<div>18 SURVEYOR CERTIFICATION</div> <p>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to best of my belief.</p> <p>JANUARY 2, 1997 Date of Survey</p> <p>Signature and Seal of Professional Surveyor:</p> <p></p> <p>Certificate Number 8278</p>	



DRILLING PROGRAM

Enron Oil & Gas Company
Mitchell Olsen 34 Fed, Well No. 3
330' FSL & 1650' FEL
Sec. 34, T25S, R34E
Lea County, New Mexico

1. Geologic Name of Surface Formation:

Permian

2. Estimated Tops of Important Geologic Markers:

Rustler	850'
Delaware Mt. Group	5175'
Bone Spring Lime	9275'
3rd Bone Spring Sand	12500'
TD	13000'

3. Estimated Depths of Anticipated Fresh Water, Oil or Gas:

Upper Permian Sands	100'	Fresh Water
3rd Bone Spring Sand	12500'	Oil

No other formations are expected to give up oil, gas or fresh water in measurable quantities. The surface fresh water sands will be protected by setting 11-3/4" casing at 650' and circulating cement back to surface, and 8-5/8" casing will be set at 5200' with cement circulated back to surface.

Enron Oil & Gas Company
 Mitchell Olsen 34 Fed, Well No. 3
 330' FSL & 1650' FEL
 Sec. 34, T25S, R34E
 Lea County, New Mexico

4. Casing Program:

<u>Hole Size</u>	<u>Interval</u>	<u>OD csg</u>	<u>Weight Grade Jt. Cond. Type</u>
14-3/4	0- 650'	11-3/4	42# H-40 A ST&C
11	0- 5200'	8-5/8	32# J-55 ST&C
7-7/8	0- 6500'	5-1/2	17# P-110 LT&C
	6500'-13000'	5-1/2	17# S-95 LT&C

Cementing Program:

11-3/4" Surface casing: Cement to surface with 250 sx of Class C + 2% CaCl₂ + 1/4#/sx flocele.

8-5/8" Intermediate: Cement to surface with 800 sx of Premium Plus lite + 15#/sx salt + 1/4#/sx Flocele and 300 sx Cl C + 2% CaCl₂

5-1/2" Prod casing: Cement with 1200 sx 50/50 Cl H/Poz + 2% gel + .4% CF-14, .1% Diacel LWL. This cement slurry is designed to bring TOC to 7500'.

5. Minimum Specifications for Pressure Control:

The blowout preventer equipment (BOP) shown in Exhibit #1 will consist of a double ram-type (5000 psi WP) preventer and an annular preventer (5000 psi WP). Units will be hydraulically operated and the ram-type will be equipped with blind rams on top and drill pipe rams on bottom. All will be installed on the 11-3/4" surface casing and used continuously until TD is reached. All BOP's and accessory equipment will be tested to 600 psi before drilling out of surface casing. Before drilling out of intermediate casing, the ram-type BOP and accessory equipment will be tested to 5000 psi and the annular to 70% of rated working pressure (3500 psi).

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. A 2" kill line and 4" choke line will be included in the drilling spool located below the ram-type BOP. Other accessories to the BOP equipment will include a kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold with 5000 psi WP rating.



ENRON OIL & GAS COMPANY
Mitchell-Olsen 34 #3

