

Submit 3 Copies To Appropriate District
Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
May 27, 2004

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-005-63779
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name AFFIRMED
8. Well Number 001
9. OGRID Number 230387
10. Pool name or Wildcat

Pit or Below-grade Tank Application ☐ or Closure ☐
Pit type _____ Depth to Groundwater _____ Distance from nearest fresh water well _____ Distance from nearest surface water _____
Pit Liner Thickness: _____ mil Below-Grade Tank: Volume _____ bbls; Construction Material _____

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☐ Gas Well ☒ Other ☐ RECEIVED

2. Name of Operator
PARALLEL PETROLEUM CORPORATION MAR 02 2006

3. Address of Operator
1004 N. BIG SPRING, SUITE 400, MIDLAND, TX 79701

4. Well Location
Unit Letter N : 400 feet from the S line and 1880 feet from the W line
Section 33 Township 14S Range 26E NMPM CHAVEZ County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
GR 3446

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☐	REMEDIAL WORK ☐	ALTERING CASING ☐
TEMPORARILY ABANDON ☐	CHANGE PLANS ☐	COMMENCE DRILLING OPNS. ☐	P AND A ☐
PULL OR ALTER CASING ☐	MULTIPLE COMPL ☐	CASING/CEMENT JOB ☐	
OTHER: ☐		OTHER: SCIENTIFIC DRILLING/INTREPID SURVEYS ☒	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

01-19-2006: ATTACHED IS SCIENTIFIC DRILLING INTERNATIONAL SURVEY REPORT, JOB 32K0106050 (COVER + 3 PAGES)

02-16-2006: ATTACHED IS INTRPID SURVEY REPORT, JOB AFFIRMED #1 (3 PAGES)

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐, a general permit ☐ or an (attached) alternative OCD-approved plan ☐.

SIGNATURE Tax M. Carmick TITLE SR PROD & REG TECHNICIAN DATE 02-28-2006

Type or print name
For State Use Only


E-mail address:

Telephone No.

FOR RECORDS ONLY

MAR 02 2006

APPROVED BY: _____ TITLE _____ DATE _____
Conditions of Approval (if any): _____

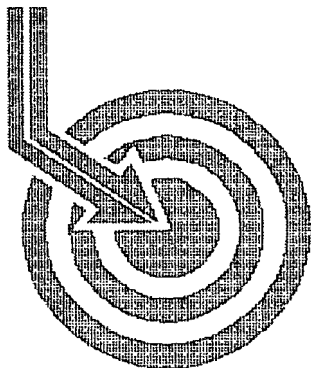

Scientific Drilling

PARALLEL PETROLEUM

Field: Wildcat
Site: Chaves County, NM
Well: Affirmed #1
Wellpath: VH - Job #32K0106050
Survey: 01/15/06

RECEIVED
MAR 02 2006
OCC-ARTS/ENR


This survey is correct to the best of my knowledge
and is supported by actual field data.

[Signature] Company Representative

Notorized this date 19th of January, 2006.

[Signature]

Notary Signature
County of Midland
State of Texas

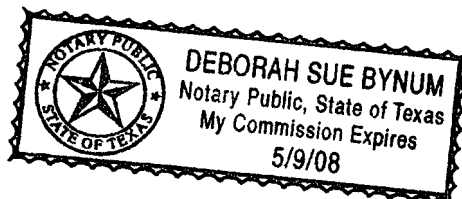



Scientific Drilling International Survey Report

Company: PARALLEL PETROLEUM	Date: 1/19/2006	Time: 16:32:25	Page: 1
Field: Wildcat	Co-ordinate(NE) Reference:	Site: Chaves County, NM, Grid North	
Site: Chaves County, NM	Vertical (TVD) Reference:	SITE 0.0	
Well: Affirmed #1	Section (VS) Reference:	Well (0.00N,0.00E,235.11Azi)	
Wellpath: VH - Job #32K0106050	Survey Calculation Method:	Minimum Curvature	Db: Sybase

Survey: 01/15/06	Start Date: 1/15/2006
Company: Scientific Drilling Internatio	Engineer: Guebara/Madrid
Tool: Keeper;Keeper Gyro	Tied-to: From Surface

Survey

MD ft	Incl deg	Azim deg	TVD ft	VS ft	N/S ft	E/W ft	DLS deg/100ft	ClsD ft	ClsA deg
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.25	254.94	100.00	0.21	-0.06	-0.21	0.25	0.22	254.94
200.00	0.52	210.01	200.00	0.82	-0.51	-0.65	0.39	0.82	232.01
300.00	0.61	236.30	299.99	1.76	-1.19	-1.32	0.27	1.78	227.81
400.00	0.65	246.00	399.99	2.85	-1.72	-2.28	0.11	2.86	232.95
500.00	0.63	246.64	499.98	3.95	-2.17	-3.30	0.02	3.95	236.70
600.00	0.40	151.27	599.98	4.53	-2.69	-3.64	0.78	4.53	233.49
700.00	0.99	134.81	699.97	4.41	-3.61	-2.86	0.62	4.60	218.38
800.00	1.50	147.91	799.95	4.32	-5.33	-1.55	0.58	5.55	196.23
900.00	1.59	154.75	899.91	4.61	-7.69	-0.26	0.21	7.69	181.96
1000.00	1.53	150.81	999.87	4.98	-10.11	0.98	0.12	10.16	174.46
1100.00	1.47	166.02	1099.84	5.57	-12.52	1.94	0.40	12.67	171.19
1200.00	1.13	193.56	1199.81	6.77	-14.72	2.02	0.70	14.86	172.19
1300.00	1.08	205.68	1299.80	8.32	-16.53	1.38	0.24	16.59	175.23
1400.00	1.29	219.19	1399.77	10.23	-18.25	0.26	0.35	18.26	179.18
1500.00	1.26	220.94	1499.75	12.38	-19.96	-1.17	0.05	19.99	183.36
1600.00	1.43	227.54	1599.72	14.68	-21.63	-2.81	0.23	21.81	187.41
1700.00	1.53	231.60	1699.69	17.25	-23.30	-4.78	0.14	23.79	191.59
1800.00	1.59	243.52	1799.65	19.95	-24.75	-7.07	0.33	25.74	195.94
1900.00	1.58	238.52	1899.61	22.70	-26.09	-9.48	0.14	27.76	199.98
2000.00	1.63	238.39	1999.57	25.50	-27.55	-11.87	0.05	30.00	203.31
2100.00	1.50	241.39	2099.54	28.22	-28.92	-14.23	0.15	32.24	206.20
2200.00	1.61	239.99	2199.50	30.92	-30.25	-16.60	0.12	34.51	208.75
2300.00	1.57	244.86	2299.46	33.67	-31.54	-19.05	0.14	36.85	211.14
2400.00	1.35	257.64	2399.43	36.11	-32.37	-21.44	0.39	38.83	213.52
2500.00	1.02	264.26	2499.41	37.97	-32.71	-23.48	0.36	40.27	215.67
2600.00	0.72	263.08	2599.40	39.31	-32.88	-24.99	0.30	41.30	217.24
2700.00	0.74	257.19	2699.39	40.46	-33.10	-26.24	0.08	42.24	218.41
2800.00	0.82	281.41	2799.38	41.55	-33.10	-27.58	0.34	43.08	219.80
2900.00	0.83	286.84	2899.37	42.49	-32.75	-28.97	0.08	43.72	221.50
3000.00	0.75	274.99	2999.36	43.45	-32.48	-30.32	0.18	44.43	223.02
3100.00	0.92	280.85	3099.35	44.51	-32.27	-31.76	0.19	45.28	224.54
3200.00	0.81	281.72	3199.34	45.55	-31.98	-33.24	0.11	46.12	226.10
3300.00	0.76	277.79	3299.33	46.53	-31.74	-34.59	0.07	46.95	227.45
3400.00	0.83	284.06	3399.32	47.49	-31.48	-35.94	0.11	47.78	228.79
3500.00	0.84	296.70	3499.31	48.31	-30.97	-37.30	0.18	48.49	230.30
3600.00	0.68	291.28	3599.30	48.99	-30.43	-38.51	0.18	49.08	231.69
3700.00	0.60	295.98	3699.29	49.58	-29.98	-39.53	0.10	49.62	232.82
3800.00	0.56	288.42	3799.29	50.13	-29.60	-40.47	0.09	50.14	233.82
3900.00	0.51	281.80	3899.28	50.72	-29.35	-41.37	0.08	50.72	234.64
4000.00	0.47	284.42	3999.28	51.30	-29.16	-42.20	0.05	51.30	235.35
4100.00	0.38	292.32	4099.28	51.74	-28.93	-42.90	0.11	51.75	236.01
4200.00	0.25	300.89	4199.28	52.01	-28.70	-43.40	0.14	52.03	236.53
4300.00	0.14	258.31	4299.28	52.21	-28.61	-43.71	0.17	52.24	236.79
4400.00	0.07	225.15	4399.28	52.39	-28.68	-43.87	0.09	52.41	236.83
4500.00	0.20	220.78	4499.27	52.62	-28.85	-44.03	0.13	52.64	236.76
4600.00	0.28	198.47	4599.27	52.98	-29.22	-44.22	0.12	53.00	236.55
4700.00	0.34	193.82	4699.27	53.40	-29.74	-44.37	0.07	53.41	236.17
4800.00	0.20	159.22	4799.27	53.66	-30.19	-44.37	0.21	53.67	235.77



Scientific Drilling International Survey Report

Company: PARALLEL PETROLEUM	Date: 1/19/2006	Time: 16:32:25	Page: 2
Field: Wildcat	Co-ordinate(NE) Reference:	Site: Chaves County, NM, Grid North	
Site: Chaves County, NM	Vertical (TVD) Reference:	SITE 0.0	
Well: Affirmed #1	Section (VS) Reference:	Well (0.00N,0.00E,235.11Azi)	
Wellpath: VH - Job #32K0106050	Survey Calculation Method:	Minimum Curvature	Db: Sybase

Survey

MD ft	Incl deg	Azim deg	TVD ft	VS ft	N/S ft	E/W ft	DLS deg/100ft	ClsD ft	ClsA deg
4900.00	0.16	98.27	4899.27	53.61	-30.37	-44.17	0.19	53.61	235.49
5000.00	0.16	120.21	4999.27	53.44	-30.46	-43.92	0.06	53.44	235.25
5100.00	0.11	129.17	5099.27	53.36	-30.59	-43.72	0.05	53.36	235.02
5200.00	0.19	67.37	5199.27	53.17	-30.59	-43.49	0.17	53.17	234.88
5300.00	0.41	356.88	5299.27	52.82	-30.17	-43.36	0.39	52.82	235.17
5371.00	0.44	144.54	5370.27	52.68	-30.14	-43.21	1.15	52.68	235.11



**Scientific
Drilling**

Field: Wildcat
Site: Chaves County, NM
Well: Affirmed #1
Wellpath: VH - Job #32K0106050
Survey: 01/15/06


G/T/M

Azimuths to Grid North
True North: 0.00°
Magnetic North: 0.00°

Magnetic Field
Strength: 0nT
Dip Angle: 0.00°
Date: 1/19/2006
Model: igrf2000

West(-)/East(+) [10ft/in]

South(-)/North(+) [10ft/in]

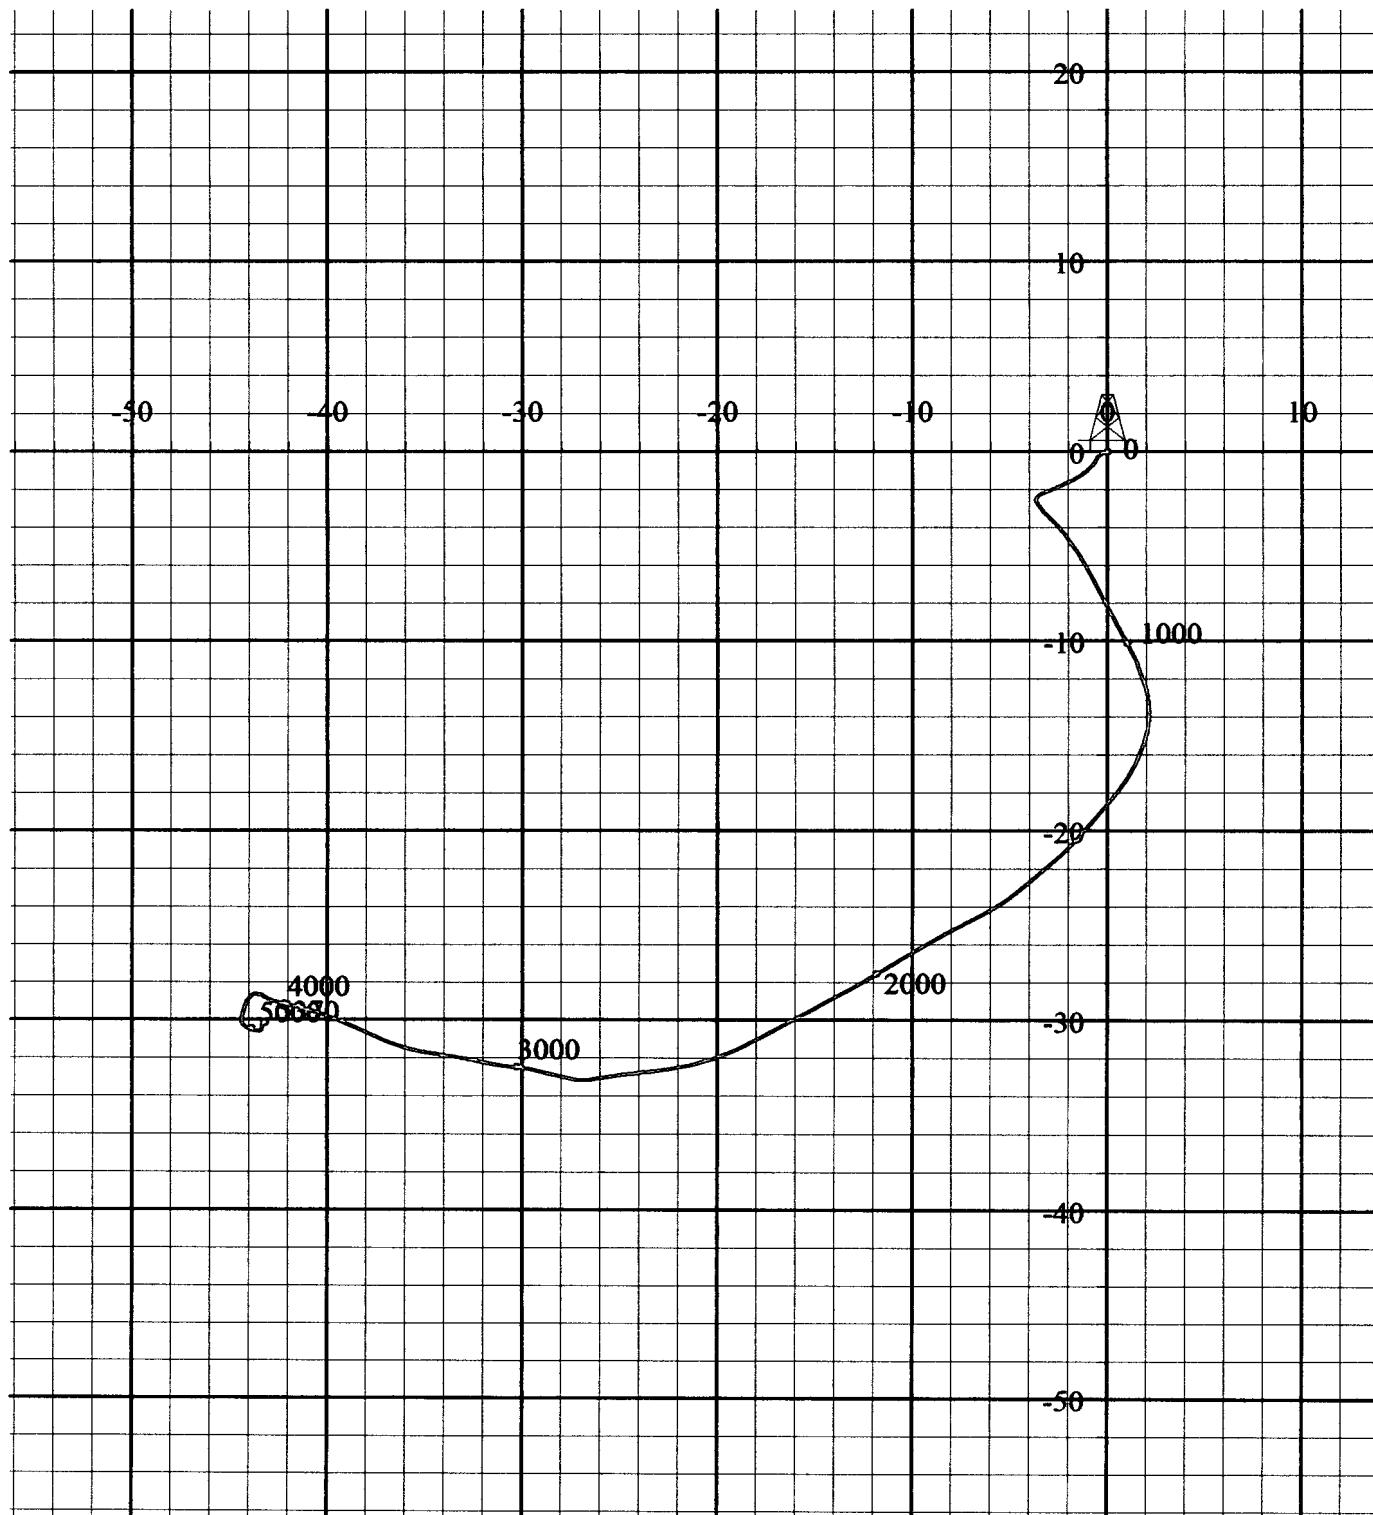

Survey Report

Report Date: February 16, 2006	Survey / DLS Computation Method: Minimum Curvature / Lubinski
Client: Parallel Petroleum Corp.	Vertical Section Azimuth: 359.800°
Field: Chaves County, NM	Vertical Section Origin: N 0.000 ft, E 0.000 ft
Structure / Slot: Affirmed #1 / Affirmed #1	TVD Reference Datum: RKB
Well: Affirmed #1	TVD Reference Elevation: 0.0 ft relative to
Borehole: Affirmed #1	Sea Bed / Ground Level Elevation: 0.000 ft relative to
UWI/API#:	Magnetic Declination: 8.641°
Survey Name / Date: Affirmed #1_surveys / January 18, 2006	Total Field Strength: 49610.155 nT
Tort / AHD / DDI / ERD ratio: 178.744° / 4105.40 ft / 6.106 / 0.772	Magnetic Dip: 60.952°
Grid Coordinate System: NAD27 New Mexico State Planes, Eastern Zone, US Feet	Declination Date: January 18, 2006
Location Lat/Long: N 33 3 11.074, W 104 20 47.090	Magnetic Declination Model: IGRF 2005
Location Grid N/E Y/X: N 746823.000 RUS, E 495992.100 RUS	North Reference: Grid North
Grid Convergence Angle: -0.00713438°	Total Corr Mag North -> Grid North: +8.648°
Grid Scale Factor: 0.99990911	Local Coordinates Referenced To: Well Head

Comments	Measured Depth (ft)	Inclination (deg)	Azimuth (deg)	TVD (ft)	Vertical Section (ft)	NS (ft)	EW (ft)	Closure (ft)	Closure Azimuth (deg)	DLS (deg/100 ft)	Tool Face (deg)
Tie-In	4800.00	0.20	159.22	4799.27	-30.03	-30.19	-44.37	53.67	235.77	0.00	2.10M
	4887.00	1.10	2.10	4886.27	-29.34	-29.49	-44.29	53.21	236.34	1.48	3.70M
	4897.00	1.80	3.70	4896.26	-29.09	-29.24	-44.28	53.06	236.56	7.01	2.80M
	4907.00	2.50	2.80	4906.26	-28.71	-28.87	-44.26	52.84	236.88	7.01	1.40M
	4919.00	3.30	1.40	4918.24	-28.11	-28.26	-44.23	52.49	237.43	6.69	3.60M
	4929.00	4.30	3.60	4928.22	-27.44	-27.60	-44.20	52.11	238.02	10.10	0.50M
	4949.00	6.60	0.50	4948.13	-25.55	-25.70	-44.15	51.08	239.79	11.59	-4.54G
	4959.00	7.60	359.90	4958.05	-24.31	-24.46	-44.14	50.47	241.00	10.03	-6.28G
	4969.00	8.70	359.10	4967.95	-22.89	-23.05	-44.16	49.81	242.44	11.06	-7.62G
	4980.00	10.00	358.10	4978.80	-21.11	-21.26	-44.20	49.05	244.31	11.91	0.00G
	4990.00	11.10	358.10	4988.63	-19.28	-19.43	-44.26	48.34	246.30	11.00	-8.58G
	5011.00	13.60	356.50	5009.15	-14.79	-14.95	-44.48	46.92	251.43	12.01	4.83G
	5026.00	15.50	357.10	5023.66	-11.03	-11.18	-44.69	46.07	255.95	12.71	9.88G
	5041.00	17.20	358.10	5038.06	-6.81	-6.96	-44.86	45.40	261.18	11.49	12.03G
	5072.00	20.90	0.30	5067.35	3.31	3.15	-44.99	45.10	274.01	12.16	7.70G
	5103.00	24.60	1.50	5095.94	15.29	15.13	-44.79	47.28	288.67	12.03	-0.63G
	5134.00	29.00	1.40	5123.60	29.26	29.10	-44.44	53.12	303.22	14.19	-6.48G
	5165.00	34.50	0.30	5149.95	45.56	45.41	-44.21	63.37	315.77	17.84	-6.91G
	5196.00	40.40	359.20	5174.55	64.40	64.25	-44.30	78.04	325.41	19.15	0.83G
	5228.00	45.30	359.30	5198.01	86.16	86.00	-44.58	96.87	332.60	15.31	-18.14G
	5258.00	50.00	357.30	5218.21	108.31	108.15	-45.26	117.24	337.29	16.42	-3.83G
	5289.00	54.90	356.90	5237.10	132.85	132.69	-46.50	140.61	340.69	15.84	-2.95G
	5319.00	58.20	356.70	5253.63	157.85	157.68	-47.90	164.80	343.10	11.01	23.87G
	5349.00	61.80	358.50	5268.63	183.80	183.63	-48.98	190.05	345.07	13.08	40.52G
	5382.00	65.80	2.20	5283.20	213.40	213.23	-48.78	218.74	347.11	15.75	17.83G
	5413.00	70.20	3.70	5294.81	242.09	241.93	-47.30	246.51	348.94	14.89	-21.10G
	5444.00	74.20	2.10	5304.29	271.56	271.40	-45.81	275.24	350.42	13.81	-50.73G
	5488.00	80.80	354.10	5313.82	314.43	314.27	-47.27	317.80	351.45	23.23	-6.55G
	5519.00	86.90	353.40	5317.14	345.07	344.89	-50.62	348.59	351.65	19.80	27.54G
	5549.00	91.70	355.90	5317.51	374.93	374.75	-53.42	378.54	351.89	18.04	87.11G
	5580.00	91.80	357.90	5316.56	405.88	405.69	-55.10	409.41	352.27	6.46	96.69G
	5611.00	91.60	359.60	5315.64	436.86	436.66	-55.77	440.21	352.72	5.52	80.52G
	5642.00	91.80	0.80	5314.72	467.84	467.65	-55.66	470.95	353.21	3.92	90.00G
	5673.00	91.80	2.10	5313.75	498.81	498.62	-54.88	501.63	353.72	4.19	-44.98G
	5704.00	91.90	2.00	5312.75	529.77	529.59	-53.77	532.31	354.20	0.46	-127.56G
	5735.00	90.90	0.70	5311.99	560.75	560.57	-53.04	563.07	354.59	5.29	165.96G
	5765.00	89.70	1.00	5311.83	590.74	590.56	-52.60	592.90	354.91	4.12	-113.64G
	5796.00	89.00	359.40	5312.18	621.74	621.56	-52.49	623.77	355.17	5.63	90.00G

Comments	Measured Depth (ft)	Inclination (deg)	Azimuth (deg)	TVD (ft)	Vertical Section (ft)	NS (ft)	EW (ft)	Closure (ft)	Closure Azimuth (deg)	DLS (deg/100 ft)	Tool Face (deg)
	5827.00	89.00	359.50	5312.72	652.73	652.55	-52.79	654.69	355.38	0.32	-71.57G
	5890.00	89.30	358.60	5313.66	715.72	715.54	-53.83	717.56	355.70	1.51	0.00G
	5952.00	89.90	358.60	5314.09	777.71	777.52	-55.34	779.49	355.93	0.97	54.46G
	6013.00	90.40	359.30	5313.93	838.70	838.51	-56.46	840.41	356.15	1.41	49.39G
	6075.00	91.00	0.00	5313.17	900.69	900.50	-56.84	902.29	356.39	1.49	-108.43G
	6107.00	90.60	358.80	5312.73	932.69	932.50	-57.18	934.25	356.49	3.95	-122.73G
	6137.00	89.70	357.40	5312.65	962.67	962.48	-58.17	964.23	356.54	5.55	-140.72G
	6199.00	88.60	356.50	5313.57	1024.59	1024.38	-61.47	1026.22	356.57	2.29	50.20G
	6229.00	89.10	357.10	5314.17	1054.54	1054.33	-63.14	1056.22	356.57	2.60	135.00G
	6260.00	89.00	357.20	5314.68	1085.50	1085.29	-64.68	1087.21	356.59	0.46	0.00G
	6290.00	89.30	357.20	5315.13	1115.47	1115.25	-66.15	1117.21	356.61	1.00	-95.72G
	6321.00	89.20	356.20	5315.54	1146.42	1146.19	-67.93	1148.20	356.61	3.24	-98.14G
	6351.00	89.10	355.50	5315.98	1176.35	1176.11	-70.11	1178.20	356.59	2.36	0.00G
	6387.00	89.10	355.50	5316.55	1212.24	1211.99	-72.93	1214.19	356.56	0.00	18.44G
	6418.00	90.00	355.80	5316.79	1243.16	1242.90	-75.28	1245.18	356.53	3.06	46.31G
	6450.00	92.10	358.00	5316.20	1275.11	1274.85	-77.01	1277.17	356.54	9.50	-86.13G
	6507.00	92.30	355.00	5314.01	1331.97	1331.69	-80.49	1334.12	356.54	5.27	-90.00G
	6537.00	92.30	354.90	5312.81	1361.83	1361.55	-83.13	1364.09	356.51	0.33	180.00G
	6568.00	92.10	354.90	5311.62	1392.70	1392.41	-85.88	1395.05	356.47	0.65	-153.45G
	6599.00	91.90	354.80	5310.54	1423.56	1423.26	-88.66	1426.02	356.44	0.72	63.42G
	6629.00	92.00	355.00	5309.52	1453.44	1453.13	-91.33	1455.99	356.40	0.75	71.55G
	6660.00	92.10	355.30	5308.41	1484.32	1484.00	-93.95	1486.97	356.38	1.02	44.95G
	6692.00	93.10	356.30	5306.96	1516.20	1515.88	-96.29	1518.93	356.37	4.42	60.19G
	6722.00	93.50	357.00	5305.23	1546.11	1545.78	-98.04	1548.88	356.37	2.68	-116.60G
	6753.00	93.40	356.80	5303.36	1577.01	1576.67	-99.71	1579.82	356.38	0.72	92.13G
	6784.00	93.30	359.40	5301.55	1607.94	1607.60	-100.74	1610.75	356.41	8.38	127.39G
	6814.00	92.00	1.10	5300.17	1637.91	1637.57	-100.61	1640.65	356.48	7.13	100.27G
	6845.00	91.60	3.30	5299.19	1668.86	1668.53	-99.42	1671.49	356.59	7.21	71.55G
	6876.00	91.70	3.60	5298.30	1699.79	1699.46	-97.55	1702.26	356.71	1.02	180.00G
	6906.00	91.20	3.60	5297.54	1729.71	1729.39	-95.67	1732.03	356.83	1.67	-168.69G
	6937.00	90.20	3.40	5297.16	1760.65	1760.33	-93.78	1762.82	356.95	3.29	78.69G
	6968.00	90.30	3.90	5297.03	1791.57	1791.27	-91.80	1793.62	357.07	1.64	11.31G
	6999.00	90.80	4.00	5296.73	1822.49	1822.19	-89.67	1824.39	357.18	1.64	-146.31G
	7031.00	90.20	3.60	5296.45	1854.41	1854.12	-87.55	1856.18	357.30	2.25	45.00G
	7062.00	90.50	3.90	5296.26	1885.34	1885.05	-85.52	1886.99	357.40	1.37	-144.17G
	7093.00	88.70	2.60	5296.48	1916.28	1916.00	-83.76	1917.83	357.50	7.16	-71.56G
	7124.00	88.80	2.30	5297.15	1947.24	1946.96	-82.44	1948.71	357.58	1.02	0.00G
	7154.00	88.90	2.30	5297.75	1977.20	1976.93	-81.23	1978.60	357.65	0.33	8.13G
	7184.00	91.00	2.60	5297.78	2007.17	2006.90	-79.95	2008.50	357.72	7.07	-144.46G
	7214.00	90.30	2.10	5297.44	2037.14	2036.88	-78.72	2038.40	357.79	2.87	116.57G
	7245.00	90.20	2.30	5297.31	2068.11	2067.85	-77.53	2069.31	357.85	0.72	108.43G
	7276.00	90.10	2.60	5297.22	2099.08	2098.82	-76.21	2100.21	357.92	1.02	98.13G
	7309.00	90.00	3.30	5297.20	2132.03	2131.78	-74.51	2133.08	358.00	2.14	153.43G
	7340.00	89.80	3.40	5297.25	2162.97	2162.73	-72.70	2163.95	358.07	0.72	78.69G
	7371.00	89.90	3.90	5297.33	2193.90	2193.66	-70.72	2194.80	358.15	1.64	99.46G
	7402.00	89.80	4.50	5297.41	2224.81	2224.58	-68.45	2225.63	358.24	1.96	20.56G
	7432.00	90.60	4.80	5297.31	2254.70	2254.48	-66.02	2255.45	358.32	2.85	57.99G
	7478.00	91.10	5.60	5296.62	2300.49	2300.29	-61.85	2301.12	358.46	2.05	-12.52G
	7509.00	92.00	5.40	5295.79	2331.32	2331.13	-58.88	2331.88	358.55	2.97	90.00G
	7571.00	92.00	5.70	5293.62	2392.97	2392.80	-52.89	2393.39	358.73	0.48	0.00G
	7602.00	92.20	5.70	5292.49	2423.79	2423.63	-49.81	2424.14	358.82	0.65	0.00G
	7634.00	92.20	5.70	5291.26	2455.60	2455.45	-46.64	2455.89	358.91	0.00	36.84G
	7664.00	92.60	6.00	5290.00	2485.40	2485.27	-43.58	2485.65	359.00	1.67	-135.03G
	7694.00	92.50	5.90	5288.67	2515.20	2515.07	-40.47	2515.40	359.08	0.47	168.70G

Comments	Measured Depth (ft)	Inclination (deg)	Azimuth (deg)	TVD (ft)	Vertical Section (ft)	NS (ft)	EW (ft)	Closure (ft)	Closure Azimuth (deg)	DLS (deg/100 ft)	Tool Face (deg)
	7726.00	92.00	6.00	5287.41	2546.99	2546.88	-37.16	2547.15	359.16	1.59	180.00G
	7757.00	91.30	6.00	5286.52	2577.80	2577.70	-33.92	2577.92	359.25	2.26	174.81G
	7787.00	90.20	6.10	5286.13	2607.62	2607.52	-30.76	2607.71	359.32	3.68	180.00G
	7848.00	89.80	6.10	5286.13	2668.25	2668.18	-24.28	2668.29	359.48	0.66	45.00G
	7910.00	89.90	6.20	5286.29	2729.87	2729.82	-17.63	2729.88	359.63	0.23	-108.44G
	7971.00	89.60	5.30	5286.55	2790.54	2790.51	-11.52	2790.54	359.76	1.56	-95.71G
	8034.00	89.50	4.30	5287.05	2853.29	2853.29	-6.25	2853.30	359.87	1.60	26.57G
	8096.00	89.90	4.50	5287.37	2915.09	2915.11	-1.50	2915.11	359.97	0.72	29.05G
	8157.00	90.80	5.00	5287.00	2975.86	2975.90	3.56	2975.90	0.07	1.69	-119.74G
	8218.00	90.00	3.60	5286.57	3036.67	3036.72	8.13	3036.73	0.15	2.64	-100.62G
	8280.00	89.70	2.00	5286.74	3098.59	3098.64	11.16	3098.66	0.21	2.63	-45.00G
	8311.00	89.90	1.80	5286.85	3129.56	3129.63	12.19	3129.65	0.22	0.91	-69.44G
	8373.00	90.20	1.00	5286.79	3191.54	3191.61	13.70	3191.64	0.25	1.38	28.60G
	8404.00	91.30	1.60	5286.39	3222.53	3222.60	14.40	3222.63	0.26	4.04	-90.00G
	8466.00	91.30	1.00	5284.98	3284.49	3284.56	15.81	3284.60	0.28	0.97	-116.57G
	8527.00	91.20	0.80	5283.65	3345.46	3345.54	16.77	3345.58	0.29	0.37	-26.56G
	8589.00	91.40	0.70	5282.24	3407.44	3407.52	17.58	3407.57	0.30	0.36	0.00G
	8681.00	91.70	0.70	5279.75	3499.39	3499.48	18.70	3499.53	0.31	0.33	56.29G
	8712.00	91.90	1.00	5278.78	3530.37	3530.46	19.16	3530.51	0.31	1.16	-116.57G
	8732.00	91.80	0.80	5278.13	3550.36	3550.45	19.48	3550.50	0.31	1.12	-26.55G
	8773.00	92.00	0.70	5276.77	3591.33	3591.42	20.01	3591.48	0.32	0.55	-172.40G
	8828.00	90.50	0.50	5275.57	3646.31	3646.40	20.59	3646.46	0.32	2.75	-135.00G
	8860.00	89.60	359.60	5275.55	3678.31	3678.40	20.62	3678.46	0.32	3.98	-9.46G
	8892.00	90.20	359.50	5275.60	3710.31	3710.40	20.37	3710.46	0.31	1.90	67.38G
	8922.00	90.70	0.70	5275.37	3740.31	3740.40	20.42	3740.46	0.31	4.33	-90.00G
	8952.00	90.70	0.00	5275.00	3770.30	3770.40	20.60	3770.45	0.31	2.33	-130.60G
	8983.00	90.10	359.30	5274.78	3801.30	3801.40	20.41	3801.45	0.31	2.97	175.43G
	9014.00	87.60	359.50	5275.41	3832.29	3832.39	20.09	3832.44	0.30	8.09	-71.56G
	9046.00	87.70	359.20	5276.72	3864.26	3864.36	19.72	3864.41	0.29	0.99	-150.29G
	9077.00	87.00	358.80	5278.15	3895.23	3895.32	19.18	3895.37	0.28	2.60	14.02G
	9107.00	87.40	358.90	5279.62	3925.19	3925.28	18.58	3925.32	0.27	1.37	135.03G
	9137.00	87.30	359.00	5281.00	3955.15	3955.24	18.03	3955.28	0.26	0.47	0.00G
	9168.00	87.40	359.00	5282.44	3986.12	3986.20	17.49	3986.24	0.25	0.32	44.97G
	9190.00	87.50	359.10	5283.42	4008.09	4008.18	17.13	4008.21	0.24	0.64	0.00G
Projected TD	9250.00	87.50	359.10	5286.03	4068.03	4068.11	16.19	4068.14	0.23	0.00	0.00G