

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised October 12, 2005
Submit to Appropriate District Office
State Lease- 4 Copies
Fee Lease- 3 Copies

OCT 23 2007
OCD-ARTESIA

☐ AMENDED REPORT

S

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number 30-015-35883	Pool Code 97553	Pool Name Four Mile Draw ; Wolfcamp, SW (G)
Property Code 36802	Property Name YELLOWSTONE 23 STATE COM	Well Number 1H
OGRID No. 7377	Operator Name EOG RESOURCES, INC.	Elevation 4132'

Surface Location


UL or lot no. P	Section 23	Township 18 SOUTH	Range 21 EAST, N.M.P.M.	Lot Idn	Feet from the 760'	North/South line SOUTH	Feet from the 660'	East/West line EAST	County EDDY
---------------------------	----------------------	-----------------------------	-----------------------------------	---------	------------------------------	----------------------------------	------------------------------	-------------------------------	-----------------------

Bottom Hole Location If Different From Surface

UL or lot no. M	Section 23	Township 18 SOUTH	Range 21 EAST, N.M.P.M.	Lot Idn	Feet from the 760'	North/South line SOUTH	Feet from the 660'	East/West line WEST	County EDDY
---------------------------	----------------------	-----------------------------	-----------------------------------	---------	------------------------------	----------------------------------	------------------------------	-------------------------------	-----------------------

Dedicated Acres 320	Joint or Infill	Consolidation Code	Order No.
-------------------------------	-----------------	--------------------	-----------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

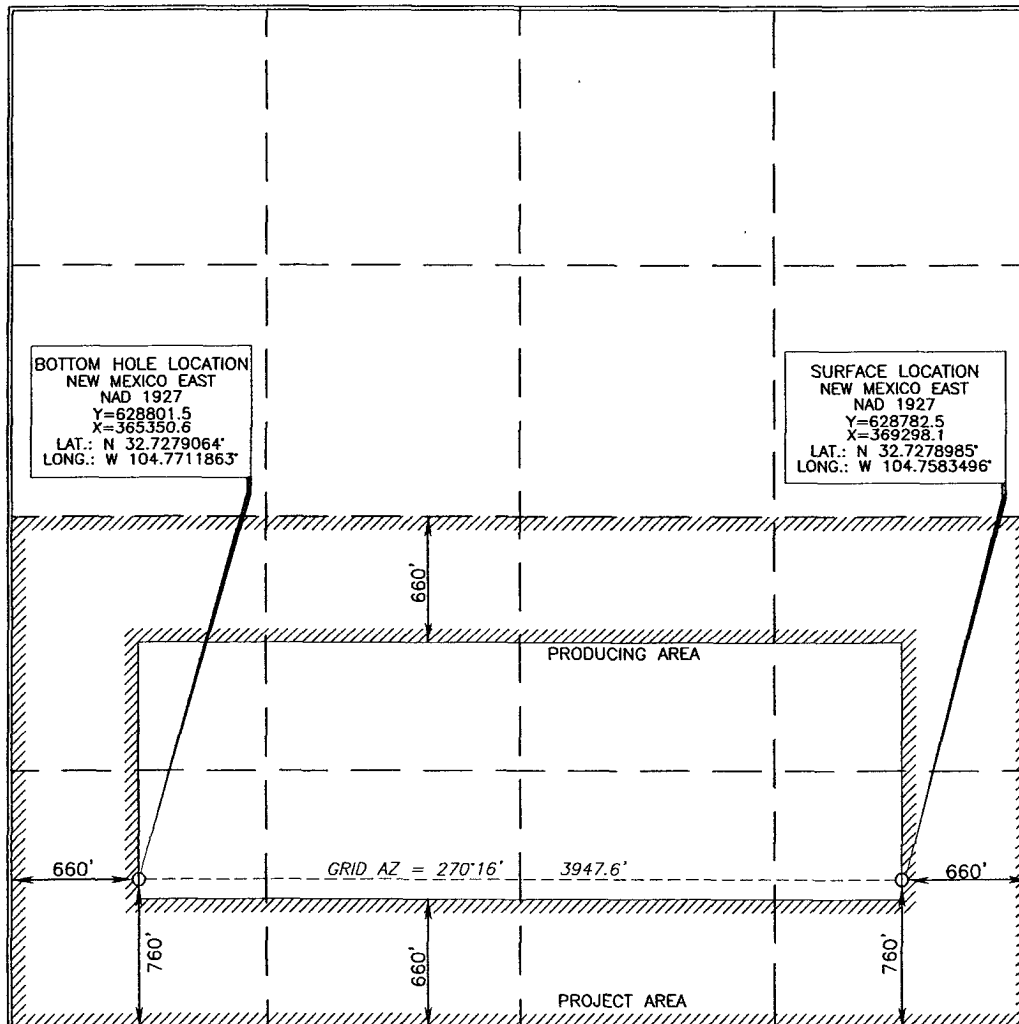

OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Donny G. Glanton 10/22/07
Signature Date

Donny G. Glanton
Printed Name

SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

15079
OCTOBER 3, 2007
Date of Survey

Signature and Seal of Professional Surveyor

Terry J. Arul 10-15-2007
Certificate Number 15079

WO# 071002WL-a (KA)

Permit Information:

Well Name: Yellowstone 23 State Com #1H

OCT 23 2007
OCD-ARTESIA**Location:**

SL 760' FSL & 660' FEL, Section 23, T-18-S, R-21-E, Eddy Co., N.M.

BHL 760' FSL & 660' FWL, Section 23, T-18-S, R-21-E, Eddy Co., N.M.

Casing Program:

Casing	Setting Depth	Hole Size	Casing Size	Casing Weight	Casing Grade	Desired TOC
Surface	900' 1250'	12-1/4"	8-5/8"	32#	J-55	Surface
Production	8,057'	7-7/8"	5 1/2"	17#	N-80	Surface

Cement Program:

Depth	No. Sacks	Slurries:
900' 1250'	500	Lead: 35:65 Poz C + 6% Bentonite + 0.005 gps FP-6L + 0.005 pps Static Free + 10 pps LCM-1 + 2% CaCl2
	400	Tail: Class C + 0.005 gps FP-6L + 0.005 pps Static Free + 0.125 pps CelloFlake
8,057'	500	Lead: 50:50 Poz:Class C + 0.005 gps FP-6L + 10% Bentonite + 0.005 pps Static Free + 0.125 pps CelloFlake
	700	Tail: 50:50 Poz:Class C + 2% Bentonite + 0.005 gps FP-6L + 0.005 pps Static Free + 5% NaCl + 0.3% FL-2A + 0.2% CD-32 + 0.05% R-3

Mud Program:

Depth	Type	Weight (ppg)	Viscosity	Water Loss
0 - 900' 1250'	Fresh - Gel	8.6-8.8	28-34	N/c
900' - 3,800'	Cut Brine	8.8-9.2	28-34	N/c
3,800' - 4,500'	Cut Brine	8.8-9.2	28-34	10-15
3,833' - 8,057'	Polymer (Lateral)	9.0-9.4	40-45	10-25



OCT 23 2007
OCD-ARTESIA

EOG Resources, Inc.
P.O. Box 2267
Midland, TX 79702
(432) 686 3600

S

October 17, 2007

State of New Mexico Energy, Minerals and Natural Resources
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

To Whom It May Concern:

I am writing to request a waiver for the inclusion of an H₂S Contingency Plan for the Yellowstone 23 State Com #1H. The current plan is to complete this well in the Wolfcamp, which is sweet, and I do not anticipate encountering any H₂S bearing formations during drilling operations.

Sincerely,



Jason LaGrega
Drilling Engineer

EOG RESOURCES INC.

Planning Report

OCT 23 2007

OLDARKIESIA

S

Database:	EDM	Local Co-ordinate Reference:	Well Yellowstone 23 State Com #1H
Company:	EOG - Midland (3)	TVD Reference:	WELL @ 4151 00ft (Original Well Elev)
Project:	Thames	MD Reference:	WELL @ 4151.00ft (Original Well Elev)
Site:	Yellowstone 23 State Com #1H	North Reference:	Grid
Well:	Yellowstone 23 State Com #1H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Yellowstone 23 State Com #1H		
Design:	Original Plan		

Project:	Thames		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Ground Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site:	Yellowstone 23 State Com #1H		
Site Position:		Northing:	628,782.50 ft
From:	Map	Easting:	369,298.10 ft
Position Uncertainty:	0 00 ft	Slot Radius:	"
		Latitude:	32° 43' 40.434 N
		Longitude:	104° 45' 30.059 W
		Grid Convergence:	-0 23 °

Well:	Yellowstone 23 State Com #1H					
Well Position	+N/-S	0.00 ft	Northing:	628,782.50 ft	Latitude:	32° 43' 40.434 N
	+E/-W	0.00 ft	Easting:	369,298.10 ft	Longitude:	104° 45' 30.059 W
Position Uncertainty		0.00 ft	Wellhead Elevation:	ft	Ground Level:	4,132 00ft

Wellbore						Yellowstone 23 State Com #1H									
Magnetics						Model Name		Sample Date		Declination		Dip Angle		Field Strength	
										(°)		(°)		(nT)	
						IGRF2005		10/17/2007		8.58		60 51		49,097	

Design:	Original Plan			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD)	+N/-S	+E/-W	Direction
	(ft)	(ft)	(ft)	(°)
	4,230.00	0.00	0 00	270.28

Plan Sections										
Measured	Inclination	Azimuth	Vertical	+N/-S	+E/-W	Dogleg	Build	Turn	TFO	Target
Depth	(°)	(°)	Depth	(ft)	(ft)	Rate	Rate	Rate	(°)	
(ft)			(ft)			(°/100ft)	(°/100ft)	(°/100ft)		
0.00	0.00	0.00	0 00	0.00	0.00	0.00	0.00	0.00	0 00	
3,833.00	0.00	360.00	3,833 00	0.00	0.00	0.00	0.00	0.00	360.00	
4,590.12	90 00	270.27	4,315.00	2.27	-481.99	11.89	11.89	0 00	270 27	
5,590.12	90.00	270.27	4,315.00	6 98	-1,481.98	0.00	0.00	0.00	0 00	
5,656.84	92.00	270.28	4,313 83	7 30	-1,548.69	3.00	3.00	0.01	0.27	
8,057.09	92.00	270.28	4,230 00	19.00	-3,947 44	0.00	0 00	0.00	0.00	
8,057.15	92.00	270 28	4,230 00	19.00	-3,947.50	3 00	-2.78	1.13	0.00 BHL (Yellowstone #	

OCT 23 2007

S

OCD-ARTESIA

Database:	EDM	Local Co-ordinate Reference:	Well Yellowstone 23 State Com #1H
Company:	EOG - Midland (3)	TVD Reference:	WELL @ 4151.00ft (Original Well Elev)
Project:	Thames	MD Reference:	WELL @ 4151 00ft (Original Well Elev)
Site:	Yellowstone 23 State Com #1H	North Reference:	Grid
Well:	Yellowstone 23 State Com #1H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Yellowstone 23 State Com #1H		
Design:	Original Plan		

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	360.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	360.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	360.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	360.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	360.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	360.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	360.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	360.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	360.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	360.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	360.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	360.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	360.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	360.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	360.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	360.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00
1,700.00	0.00	360.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00
1,800.00	0.00	360.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00
1,900.00	0.00	360.00	1,900.00	0.00	0.00	0.00	0.00	0.00	0.00
2,000.00	0.00	360.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00
2,100.00	0.00	360.00	2,100.00	0.00	0.00	0.00	0.00	0.00	0.00
2,200.00	0.00	360.00	2,200.00	0.00	0.00	0.00	0.00	0.00	0.00
2,300.00	0.00	360.00	2,300.00	0.00	0.00	0.00	0.00	0.00	0.00
2,400.00	0.00	360.00	2,400.00	0.00	0.00	0.00	0.00	0.00	0.00
2,500.00	0.00	360.00	2,500.00	0.00	0.00	0.00	0.00	0.00	0.00
2,600.00	0.00	360.00	2,600.00	0.00	0.00	0.00	0.00	0.00	0.00
2,700.00	0.00	360.00	2,700.00	0.00	0.00	0.00	0.00	0.00	0.00
2,800.00	0.00	360.00	2,800.00	0.00	0.00	0.00	0.00	0.00	0.00
2,900.00	0.00	360.00	2,900.00	0.00	0.00	0.00	0.00	0.00	0.00
3,000.00	0.00	360.00	3,000.00	0.00	0.00	0.00	0.00	0.00	0.00
3,100.00	0.00	360.00	3,100.00	0.00	0.00	0.00	0.00	0.00	0.00
3,200.00	0.00	360.00	3,200.00	0.00	0.00	0.00	0.00	0.00	0.00
3,300.00	0.00	360.00	3,300.00	0.00	0.00	0.00	0.00	0.00	0.00
3,400.00	0.00	360.00	3,400.00	0.00	0.00	0.00	0.00	0.00	0.00
3,500.00	0.00	360.00	3,500.00	0.00	0.00	0.00	0.00	0.00	0.00
3,600.00	0.00	360.00	3,600.00	0.00	0.00	0.00	0.00	0.00	0.00
3,700.00	0.00	360.00	3,700.00	0.00	0.00	0.00	0.00	0.00	0.00
3,800.00	0.00	360.00	3,800.00	0.00	0.00	0.00	0.00	0.00	0.00
3,833.00	0.00	360.00	3,833.00	0.00	0.00	0.00	0.00	0.00	0.00
3,900.00	7.96	270.27	3,899.78	0.02	-4.65	4.65	11.89	11.89	0.00
4,000.00	19.85	270.27	3,996.68	0.13	-28.64	28.64	11.89	11.89	0.00
4,100.00	31.74	270.27	4,086.55	0.34	-72.08	72.08	11.89	11.89	0.00
4,200.00	43.63	270.27	4,165.55	0.63	-133.10	133.10	11.89	11.89	0.00
4,300.00	55.51	270.27	4,230.29	0.99	-209.08	209.08	11.89	11.89	0.00
4,400.00	67.40	270.27	4,277.99	1.40	-296.76	296.77	11.89	11.89	0.00
4,500.00	79.29	270.27	4,306.60	1.85	-392.40	392.40	11.89	11.89	0.00
4,590.12	90.00	270.27	4,315.00	2.27	-481.99	482.00	11.89	11.89	0.00
4,600.00	90.00	270.27	4,315.00	2.32	-491.87	491.88	0.00	0.00	0.00
4,700.00	90.00	270.27	4,315.00	2.79	-591.87	591.88	0.00	0.00	0.00
4,800.00	90.00	270.27	4,315.00	3.26	-691.87	691.88	0.00	0.00	0.00
4,900.00	90.00	270.27	4,315.00	3.73	-791.87	791.88	0.00	0.00	0.00
5,000.00	90.00	270.27	4,315.00	4.20	-891.87	891.88	0.00	0.00	0.00
5,100.00	90.00	270.27	4,315.00	4.67	-991.87	991.88	0.00	0.00	0.00

EOG RESOURCES INC.

Planning Report

OCT 23 2007
OCD-ARTESIA

S

Database: EDM
 Company: EOG - Midland (3)
 Project: Thames
 Site: Yellowstone 23 State Com #1H
 Well: Yellowstone 23 State Com #1H
 Wellbore: Yellowstone 23 State Com #1H
 Design: Original Plan

Local Co-ordinate Reference:
 TVD Reference:
 MD Reference:
 North Reference:
 Survey Calculation Method:

Well Yellowstone 23 State Com #1H
 WELL @ 4151.00ft (Original Well Elev)
 WELL @ 4151.00ft (Original Well Elev)
 Grid
 Minimum Curvature

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/S (ft)	+E/W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
5,200.00	90 00	270.27	4,315.00	5.15	-1,091.86	1,091.88	0.00	0 00	0.00
5,300.00	90 00	270.27	4,315.00	5.62	-1,191.86	1,191.88	0.00	0 00	0.00
5,400.00	90.00	270.27	4,315.00	6.09	-1,291.86	1,291.88	0.00	0.00	0.00
5,500.00	90 00	270.27	4,315.00	6.56	-1,391.86	1,391.88	0.00	0.00	0.00
5,590.12	90.00	270.27	4,315.00	6.98	-1,481.98	1,482.00	0.00	0.00	0.00
5,600.00	90.30	270.27	4,314.97	7.03	-1,491.86	1,491.88	3.00	3.00	0.01
5,656.84	92 00	270.28	4,313.83	7.30	-1,548.69	1,548.71	3.00	3.00	0.01
5,700.00	92 00	270.28	4,312.33	7.51	-1,591.82	1,591.84	0.00	0.00	0.00
5,800.00	92 00	270.28	4,308.83	8.00	-1,691.76	1,691.78	0.00	0.00	0.00
5,900.00	92 00	270.28	4,305.34	8.49	-1,791.69	1,791.71	0.00	0.00	0.00
6,000.00	92.00	270.28	4,301.85	8.98	-1,891.63	1,891.65	0.00	0.00	0.00
6,100.00	92.00	270.28	4,298.36	9.46	-1,991.57	1,991.59	0.00	0.00	0.00
6,200.00	92.00	270.28	4,294.86	9.95	-2,091.51	2,091.53	0.00	0.00	0.00
6,300.00	92.00	270.28	4,291.37	10.44	-2,191.45	2,191.47	0.00	0.00	0.00
6,400.00	92.00	270.28	4,287.88	10.92	-2,291.38	2,291.41	0.00	0.00	0.00
6,500.00	92.00	270.28	4,284.39	11.41	-2,391.32	2,391.35	0.00	0.00	0.00
6,600.00	92.00	270.28	4,280.89	11.90	-2,491.26	2,491.29	0.00	0.00	0.00
6,700.00	92 00	270.28	4,277.40	12.39	-2,591.20	2,591.23	0.00	0.00	0.00
6,800.00	92.00	270.28	4,273.91	12.87	-2,691.13	2,691.17	0.00	0.00	0.00
6,900.00	92 00	270.28	4,270.42	13.36	-2,791.07	2,791.10	0.00	0.00	0.00
7,000.00	92.00	270.28	4,266.92	13.85	-2,891.01	2,891.04	0.00	0.00	0.00
7,100.00	92.00	270.28	4,263.43	14.34	-2,990.95	2,990.98	0.00	0.00	0.00
7,200.00	92 00	270.28	4,259.94	14.82	-3,090.89	3,090.92	0.00	0.00	0.00
7,300.00	92.00	270.28	4,256.44	15.31	-3,190.82	3,190.86	0.00	0.00	0.00
7,400.00	92 00	270.28	4,252.95	15.80	-3,290.76	3,290.80	0.00	0.00	0.00
7,500.00	92 00	270.28	4,249.46	16.29	-3,390.70	3,390.74	0.00	0.00	0.00
7,600.00	92.00	270.28	4,245.97	16.77	-3,490.64	3,490.68	0.00	0.00	0.00
7,700.00	92.00	270.28	4,242.47	17.26	-3,590.57	3,590.62	0.00	0.00	0.00
7,800.00	92.00	270.28	4,238.98	17.75	-3,690.51	3,690.55	0.00	0.00	0.00
7,900.00	92 00	270.28	4,235.49	18.23	-3,790.45	3,790.49	0.00	0.00	0.00
8,000.00	92 00	270.28	4,232.00	18.72	-3,890.39	3,890.43	0.00	0.00	0.00
8,057.09	92.00	270.28	4,230.00	19.00	-3,947.44	3,947.49	0.00	0.00	0.00
8,057.15	92.00	270.28	4,230.00	19.00	-3,947.50	3,947.55	3.00	-2.78	1.13
BHL (Yellowstone #1H)									

Targets

Target Name	-hit/miss target	Dip Angle (°)	Dip Dir (°)	TVD (ft)	+N/S (ft)	+E/W (ft)	Northing (ft)	Easting (ft)	Latitude	Longitude
BHL (Yellowstone #1H)	- plan hits target	0 00	360.00	4,230.00	19 00	-3,947.50	628,801.50	365,350.60	32° 43' 40.463 N	104° 46' 16.270 W
	- Point									

WELL DETAILS: Yellowstone 23 State Com #1H



S

+N/-S	+E/-W	Northing	Ground Level:	4132.00	Latitude	Longitude	Slot
0.00	0.00	628782.50	Easting	369298.10	32° 43' 40.434 N	104° 45' 30.059 W	


SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFac	Target	Sec
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2	3833.00	0.00	360.00	3833.00	0.00	0.00	0.00	360.00	0.00	
3	4590.12	90.00	270.27	4315.00	2.27	-481.99	11.89	270.27	482.00	
4	5590.12	90.00	270.27	4315.00	6.98	-1481.98	0.00	0.00	1482.00	
5	5656.84	92.00	270.28	4313.83	7.30	-1548.69	3.00	0.27	1548.71	
6	8057.09	92.00	270.28	4230.00	19.00	-3947.44	0.00	0.00	3947.49	
7	8057.15	92.00	270.28	4230.00	19.00	-3947.50	0.00	0.00	3947.55	

OCT 23 2007
OCD-ARTESIA

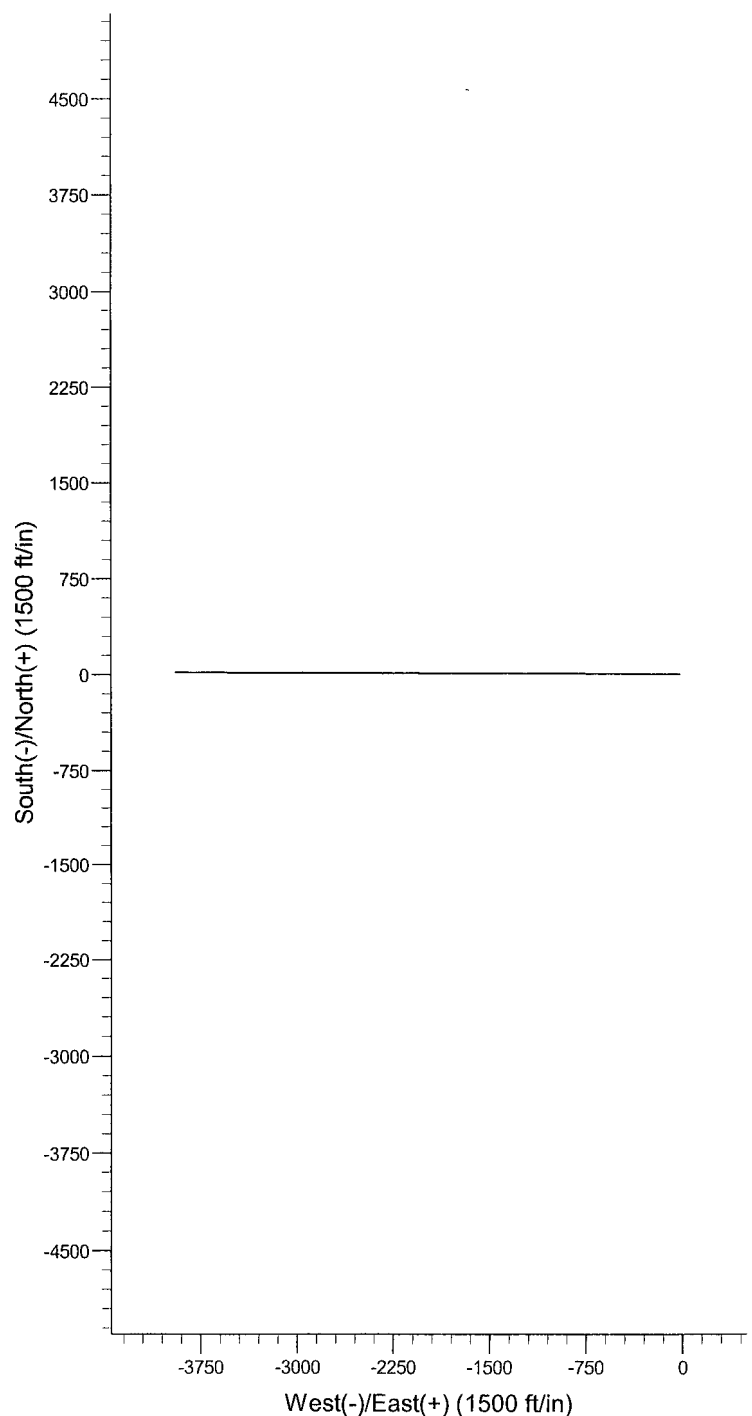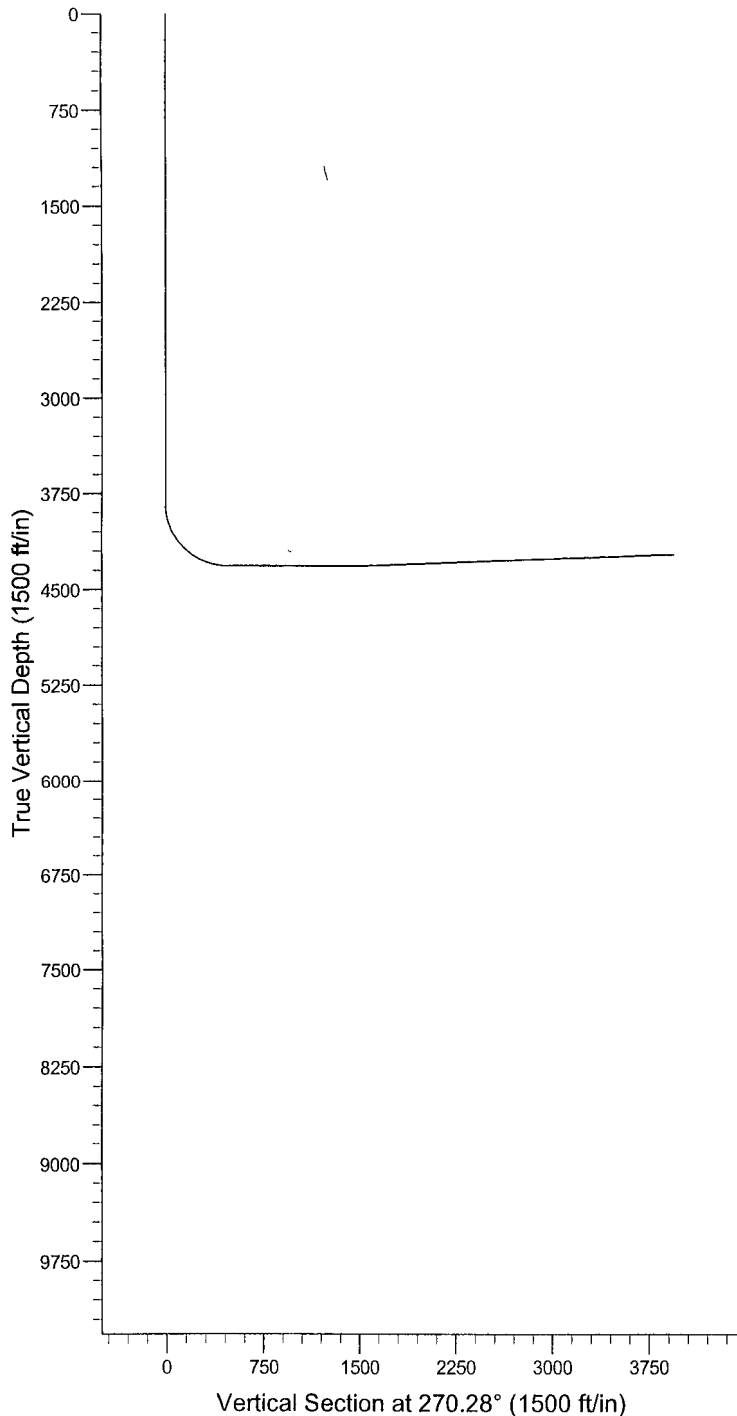

New Mexico Double Horseshoe Reserve Pit Design

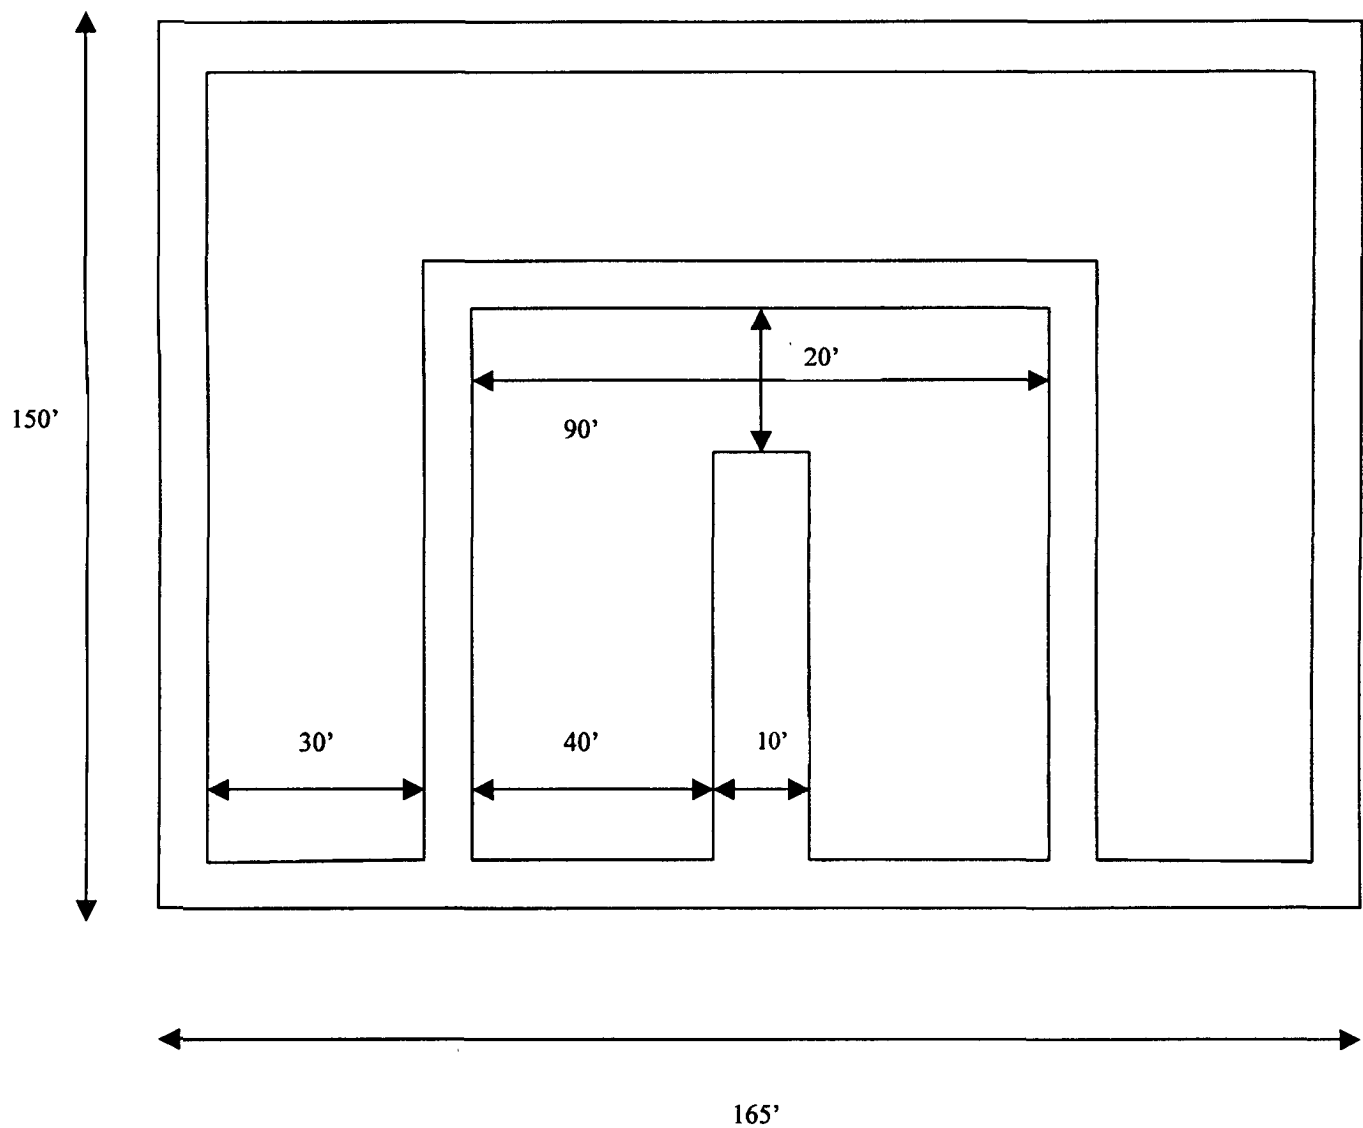

Approximate Inside Reserve Volume: 4500 bbls
Approximate Outside Reserve Volume: 5800 bbls